








M16选择钮 / M16 Selector Switch Button

名称/外观 Product appearance	操作位规格 Operation	触点 Contact	产品型号 Model	色环颜色 Ring Color		
圆形 / Round  	90° 2位 2 Position	自锁/Maintained	单刀/SPDT	<b>M16-4112</b> ■	请用下列颜色编码 替换型号中的"■" <b>R</b> 红色/Red <b>G</b> 绿色/Green <b>Y</b> 黄色/Yellow <b>W</b> 白色/White <b>B</b> 蓝色/Blue	
		自复/Momentary	单刀/SPDT	<b>M16-4110</b> ■		
		自锁/Maintained	双刀/DPDT	<b>M16-4122</b> ■		
		自复/Momentary	双刀/DPDT	<b>M16-4120</b> ■		
		90° 3位 3 Position	自锁/Maintained	双刀/DPDT		<b>M16-5123</b> ■
			左锁右复/Left lock Right reset	双刀/DPDT		<b>M16-5127</b> ■
	左复右锁/Left reset Right lock		双刀/DPDT	<b>M16-5126</b> ■		
	自复/Momentary		双刀/DPDT	<b>M16-5121</b> ■		
	自锁/Maintained		三刀/TPDT	<b>M16-5133</b> ■		
	左锁右复/Left lock Right reset		三刀/TPDT	<b>M16-5137</b> ■		
	左复右锁/Left reset Right lock		三刀/TPDT	<b>M16-5136</b> ■		
	自复/Momentary		三刀/TPDT	<b>M16-5131</b> ■		
	方形 / Square  	90° 2位 2 Position	自锁/Maintained	单刀/SPDT		<b>M16-4212</b> ■
			自复/Momentary	单刀/SPDT		<b>M16-4210</b> ■
自锁/Maintained			双刀/DPDT	<b>M16-4222</b> ■		
自复/Momentary			双刀/DPDT	<b>M16-4220</b> ■		
90° 3位 3 Position			自锁/Maintained	双刀/DPDT	<b>M16-5223</b> ■	
			左锁右复/Left lock Right reset	双刀/DPDT	<b>M16-5227</b> ■	
		左复右锁/Left reset Right lock	双刀/DPDT	<b>M16-5226</b> ■		
		自复/Momentary	双刀/DPDT	<b>M16-5221</b> ■		
		自锁/Maintained	三刀/TPDT	<b>M16-5233</b> ■		
		左锁右复/Left lock Right reset	三刀/TPDT	<b>M16-5237</b> ■		
		左复右锁/Left reset Right lock	三刀/TPDT	<b>M16-5236</b> ■		
		自复/Momentary	三刀/TPDT	<b>M16-5231</b> ■		


圆形选择钮






单刀/1Pole  
双刀/2Pole




方形选择钮




单刀/1Pole  
双刀/2Pole



安装尺寸图 / Installation size

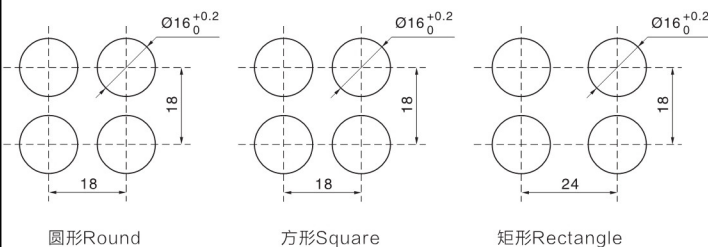

端子排列图 / Terminal style



□ 右侧产品的底座看成正面时，端子排列顺序及内部电路图。  
As shown at right, the base of product to be seen as front side, which show terminal disposition and inside coil drawing.

□ 产品出厂时基本安装触点座1C(1a+1b), 在需要时请指定增加最多3C(1a+1b), Product assemble contact 1C(1a+1b), if needed, Please appoint to add at least 3C(1a+1b)