































22M16钥匙钮开关 / 22M16 Key Switch Button

名称/外观 Product appearance	操作位规格 Operation	触点 Contact	产品型号 Model	色环颜色 Ring Color		
圆形 / Round 	90° 2位 2 Postion	 自锁/Maintained	单刀/SPDT	22M16-6112 ■	请用下列颜色编码 替换型号中的"■" K 黑色 / Black S 银色 / Silver	
		 自复/Momentary	单刀/SPDT	22M16-6110 ■		
		 自锁/Maintained	双刀/DPDT	22M16-6122 ■		
		 自复/Momentary	双刀/DPDT	22M16-6120 ■		
		90° 3位 3 Postion	 自锁/Maintained	双刀/DPDT		22M16-7123 ■
			 左锁右复/Left lock Right reset	双刀/DPDT		22M16-7127 ■
	 左复右锁/Left reset Right lock		双刀/DPDT	22M16-7126 ■		
	 自复/Momentary		双刀/DPDT	22M16-7121 ■		
	 自锁/Maintained		三刀/TPDT	22M16-7133 ■		
	 左锁右复/Left lock Right reset		三刀/TPDT	22M16-7137 ■		
	 左复右锁/Left reset Right lock		三刀/TPDT	22M16-7136 ■		
	 自复/Momentary		三刀/TPDT	22M16-7131 ■		
	方形 / Square 		90° 2位 2 Postion	 自锁/Maintained		单刀/SPDT
		 自复/Momentary		单刀/SPDT		22M16-6210 ■
		 自锁/Maintained		双刀/DPDT		22M16-6222 ■
 自复/Momentary		双刀/DPDT		22M16-6220 ■		
90° 3位 3 Postion		 自锁/Maintained		双刀/DPDT	22M16-7223 ■	
		 左锁右复/Left lock Right reset		双刀/DPDT	22M16-7227 ■	
		 左复右锁/Left reset Right lock	双刀/DPDT	22M16-7226 ■		
		 自复/Momentary	双刀/DPDT	22M16-7221 ■		
		 自锁/Maintained	三刀/TPDT	22M16-7233 ■		
		 左锁右复/Left lock Right reset	三刀/TPDT	22M16-7237 ■		
		 左复右锁/Left reset Right lock	三刀/TPDT	22M16-7236 ■		
		 自复/Momentary	三刀/TPDT	22M16-7231 ■		

圆形钥匙钮






单刀/1Pole
双刀/2Pole



方形钥匙钮




单刀/1Pole
双刀/2Pole



□ 安装尺寸图 / Installation size


圆形/方形 Round/Square

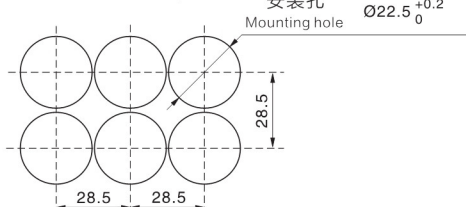

注：安装间距是小值，请考虑自身设备的作业性、使用的操作性后再确定安装孔间距。

Note: above installation gap is the min value, please determine the installation hole gap according to equipment operation property and using property.

□ 端子排列图 / Terminal style



As shown at right, the base of product to be seen as front side, which show terminal disposition and inside coil drawing.

□ 产品出产时基本安装触点座1C(1a+1b), 在需要时请指定增加最多3C(1a+1b).
Product assemble contact 1C(1a+1b), if needed, Please appoint to add at least 3C(1a+1b)