






























22M16钥匙钮开关 / 22M16 Key Switch Button

名称/外观 Product appearance	操作位规格 Operation	触点 Contact	产品型号 Model	色环颜色 Ring Color			
圆形 / Round 	90° 2位 2 Postion	 自锁/Maintained	单刀/SPDT	22M16-6112 ■	请用下列颜色编码 替换型号中的"■" K 黑色 / Black S 银色 / Silver		
		 自复/Momentary	单刀/SPDT	22M16-6110 ■			
		 自锁/Maintained	双刀/DPDT	22M16-6122 ■			
		 自复/Momentary	双刀/DPDT	22M16-6120 ■			
	90° 3位 3 Postion	 自锁/Maintained	双刀/DPDT	22M16-7123 ■			
		 左锁右复/Left lock Right reset	双刀/DPDT	22M16-7127 ■			
		 左复右锁/Left reset Right lock	双刀/DPDT	22M16-7126 ■			
		 自复/Momentary	双刀/DPDT	22M16-7121 ■			
		 自锁/Maintained	三刀/TPDT	22M16-7133 ■			
		 左锁右复/Left lock Right reset	三刀/TPDT	22M16-7137 ■			
		 左复右锁/Left reset Right lock	三刀/TPDT	22M16-7136 ■			
		 自复/Momentary	三刀/TPDT	22M16-7131 ■			
		方形 / Square 	90° 2位 2 Postion	 自锁/Maintained		单刀/SPDT	22M16-6212 ■
				 自复/Momentary		单刀/SPDT	22M16-6210 ■
 自锁/Maintained	双刀/DPDT			22M16-6222 ■			
 自复/Momentary	双刀/DPDT			22M16-6220 ■			
90° 3位 3 Postion	 自锁/Maintained		双刀/DPDT	22M16-7223 ■			
	 左锁右复/Left lock Right reset		双刀/DPDT	22M16-7227 ■			
	 左复右锁/Left reset Right lock		双刀/DPDT	22M16-7226 ■			
	 自复/Momentary		双刀/DPDT	22M16-7221 ■			
	 自锁/Maintained		三刀/TPDT	22M16-7233 ■			
	 左锁右复/Left lock Right reset		三刀/TPDT	22M16-7237 ■			
 左复右锁/Left reset Right lock	三刀/TPDT	22M16-7236 ■					
 自复/Momentary	三刀/TPDT	22M16-7231 ■					

圆形钥匙钮






单刀/1Pole
双刀/2Pole




方形钥匙钮



单刀/1Pole
双刀/2Pole




□ 安装尺寸图 / Installation size

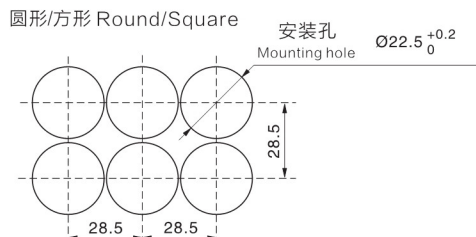

注：安装间距是小值，请考虑自身设备的作业性、使用的操作性后再确定安装孔间距。

Note: above installation gap is the min value, please determine the installation hole gap according to equipment operation property and using property.

□ 端子排列图 / Terminal style

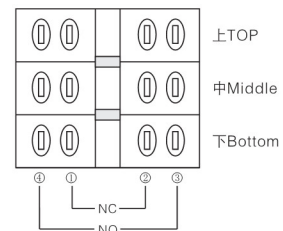

As shown at right, the base of product to be seen as front side, which show terminal disposition and inside coil drawing.

- 产品出产时基本安装触点座1C(1a+1b), 在需要时请指定增加最多3C(1a+1b)。
Product assemble contact 1C(1a+1b), if needed, Please appoint to add at least 3C(1a+1b)