

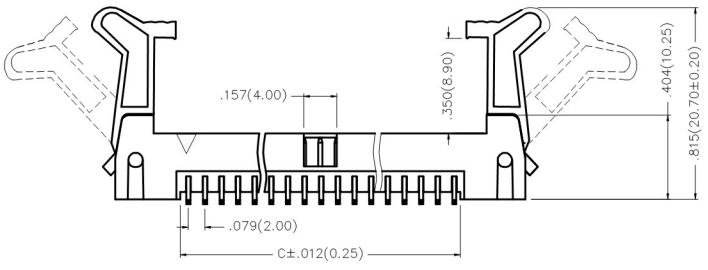
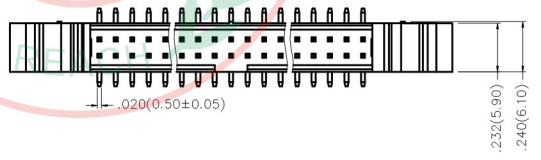


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical  
 Current Rating: 2.0A AC(rms)/DC  
 Voltage Rating: 250V AC(rms)/DC  
 Contact Resistance: 20 mΩ Max  
 Insulation Resistance: 1000 MΩ Min  
 Withstanding Voltage: 500V AC r.m.s  
 Temperature Range—Operating: -40°C~+105°C


Material and Plating  
 Housing: Glass Filled Polyester (UL 94V-0)  
 Pin: Brass  
 Pin plating: Gold Plated/ Selective gold in contact area, tin on tail

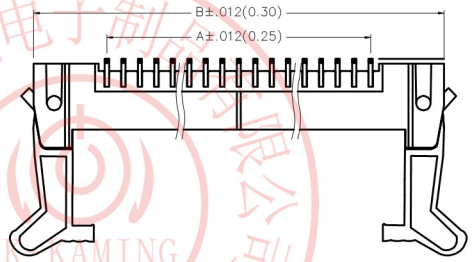

Ordering Information

FBH 200 10 — D XX S X XX 4 K6 X  
 1 2 3 4 5 6 7 8 9 10 11

1	Category FBH—Box Header	2	Series Number 200—Pitch 2.00mm	3	Distinction No. 10	4	Row Option D—Double Row	5	Circuits XX	6	Entry Angle S—180° Vertical
7	Plating 1—Gold plated 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom plate available	9	Material—Resin 4—PA6T	10	Color—Resin K6—Black	11	Packaging M—Reel L—Tube		

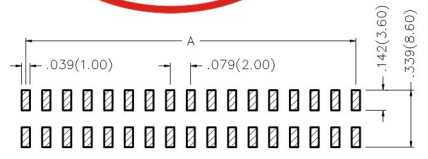

Recommended P.C.Board Layout

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 29/AUG/13	PART NO. FBH20010-DXXSXXX4K6X	ITEM NO. FBH20010	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X.±5' .X'±2' .XX'±1' .XXX'±0.5'	CHECKED BY CHERRY	DATE 29/AUG/13	TITLE Wire to Board(Box Header) Pitch 2.00mm Vertical 180°(SMT)	
SCALE 5:1	SIZE A4	DRAWN BY JACOB		DATE 29/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		