

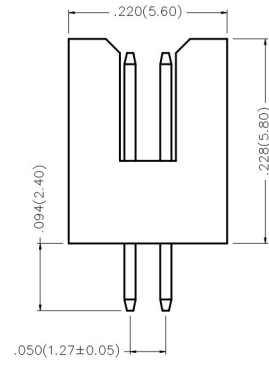


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Update version	06/SEP/16	VERNON	

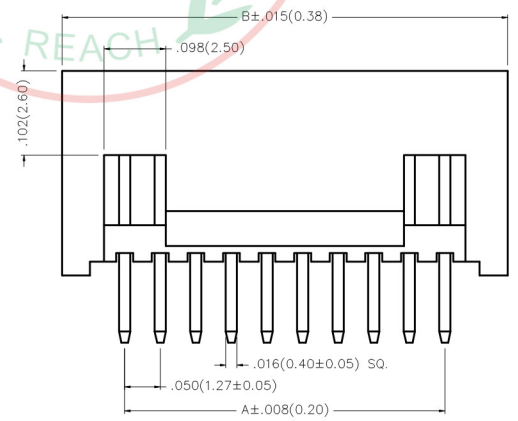

Electrical  
 Current Rating: 1.0A AC(rms)/DC  
 Voltage Rating: 250V AC(rms)/DC  
 Contact Resistance: 20 mΩ Max  
 Insulation Resistance: 500 MΩ MIN  
 Withstanding Voltage: 100V AC r.m.s  
 Temperature Range-Operating: -40°C~+85°C


Material and Plating  
 Housing: Glass Filled Polyester (UL 94V-0)  
 Contact Pin: Brass  
 Plating: Gold Plated

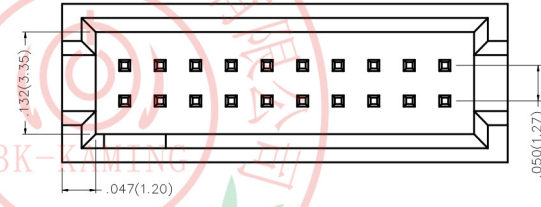

### Ordering Information

FBH 127 01 - D XX S 1 XX X K6 X  
 1 2 3 4 5 6 7 8 9 10 11

1 Category FBH-Box Header	2 Series Number 127-Pitch 1.27mm	3 Distinction No. 01	4 Row Option D-Double Row	5 Circuits XX	6 Entry Angle S-180° Vertical
7 Plating 1-Gold Plated	8 Thickness of plating 00-Gold Flash 05-5μ" Custom plate available	9 Material-Resin 3-LCP 4-PA9T	10 Color-Resin K6-Black	11 Packaging K-Tray L-Tube	

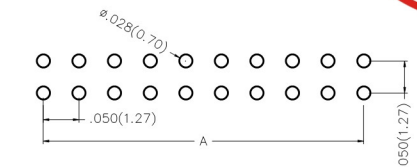

Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FBH12701-DXXS1XXXK6X	ITEM NO. FBH12701	 3K-KAMING	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20)	X.±5' .X'±2'	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE Wire to Board(Box Header) Pitch 1.27mm 180° Vertical (DIP)		REV 1
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX'±1' .XXX'±0.5'	DRAWN BY JACOB	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		