





REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Electrical
 Current Rating: 2.0A AC(rms)/DC
 Voltage Rating: 500V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 1000 MΩ MIN
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range-Operating: -40°C~+105°C

Material
 Housing: PA6T (UL 94V-0) Black
 Pin: Brass/ Gold Plated

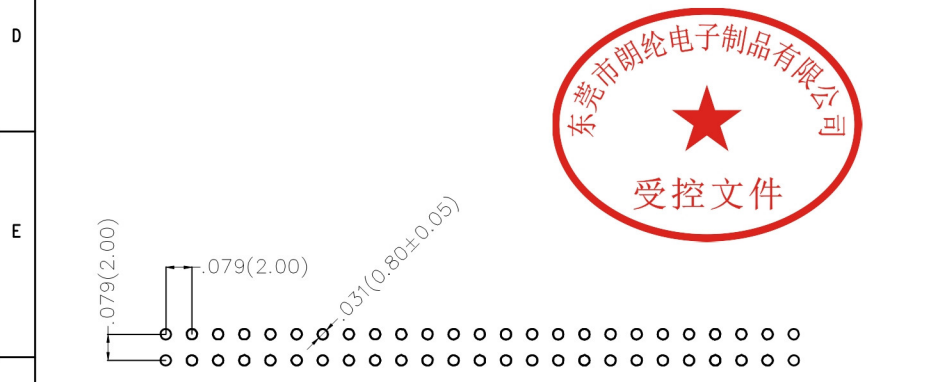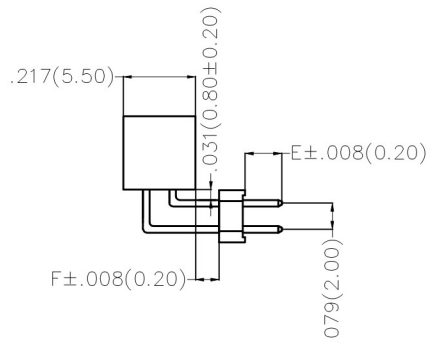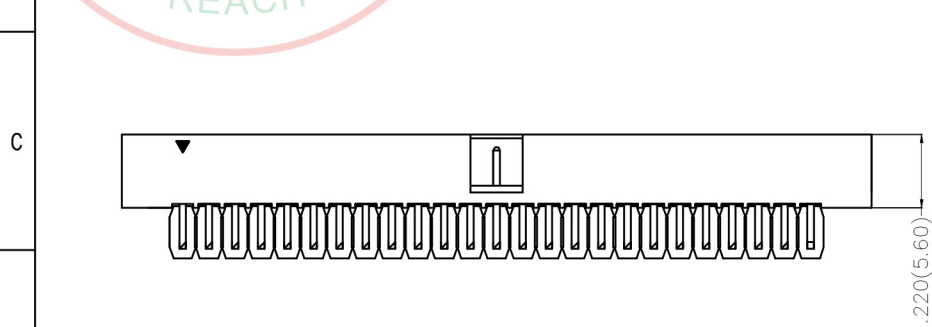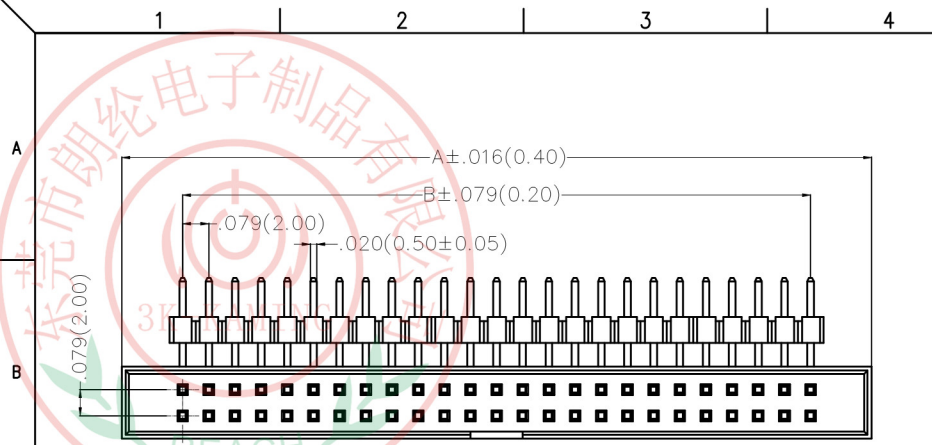

Recommended P.C.Board Layout
 Tolerances: ±.002(0.05)



Ordering Information

FBH 200 16 - D XX B 1 00 4 K6 XX K
 1 2 3 4 5 6 7 8 9 10 11 12

1 Category FBH-Box Header	2 Series Number 200-Pitch2.00mm	3 Distinction No. 16	4 Row Option D-Double Row	5 Circuits XX	6 Entry Angle B-90° Angle
7 Plating 1-Gold Plated	8 Thickness of Plating 00-Gold Flash 06-6μ" Custom plate available	9 Material-Resin 4-PA6T	10 Color-Resin K6-Black	11 Pin Length(E) Serial number:01,02... E/F:Custom length Available(See Table1)	12 Packaging K-Tray

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED) X.±.014(0.35) X.'±5' X.X±.012(0.30) .X'±2' X.XX±.008(0.20) .XX'±1' X.XXX±.004(0.10) .XXX'±0.5'		APPROVE BY VERNON DATE 07/AUG/17	CHECKED BY KATE DATE 07/AUG/17	DRAWN BY LXF DATE 07/AUG/17	PART NO. FBH20016-DXXB1XX4K6XXK	ITEM NO. FBH20016	 3K-KAMING® REV 0 SHEET NO. 1/3
	TITLE Board to Board(Box Header) Pitch 2.00mm 90° Angle(DIP)			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				