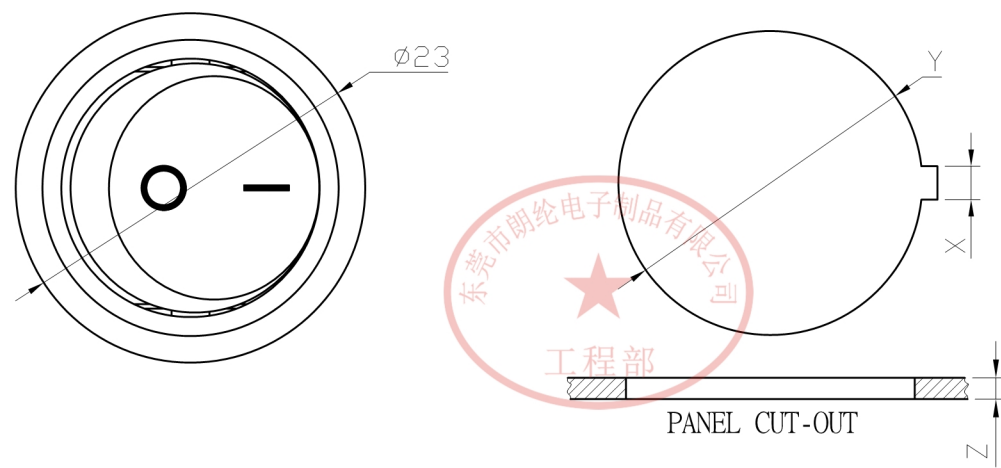
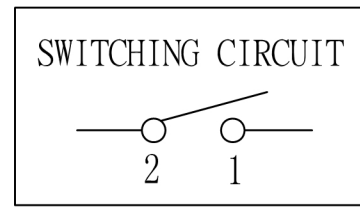




Rating:
 CQC 6A 250V AC T85
 6A/125A 250VAC
 UL cUL 10A 125V AC/6A 250V AC
 VDE 6(4)A 250V AC T85/55
 KC 6(4)A 250V AC

Circuit Diagram: 3P ON-ON
 Terminal Strength: $\geq 80N$
 Electrical life: ≥ 10000 cycles
 Withstand Voltage: Withstand Voltage:1800VAC 1min
 Terminals to Button:3000VAC 1min
 Leakage Current: 1mA
 Current resistance: $\leq 50m\Omega$ (initial)
 Insulation resistance: $\geq 100M\Omega$



PANEL CUT-OUT		
Z	Y	X
0.70~1.25	20.00~20.10	2.10~2.20
1.25~2.00	20.10~20.20	2.10~2.20
2.00~3.00	20.20~20.30	2.10~2.20

A4				普通公差:	 3K-KAMING	东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd						
A3			COMMON TOLERANCE:	单位		mm	投影		品名	跷板开关	比例	1.5:1
A2			UP TO 5	±0.20		核 对	朱文林	核 对	吴路方	型号	3K601C2-1010011BB	
A1			ABOVE 5 TO 30	±0.30		绘 图	朱文林	核 准	周培雷	图号	3K601C2-1010011BB	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	2012.11.14	核 准	周培雷	图号	3K601C2-1010011BB	