


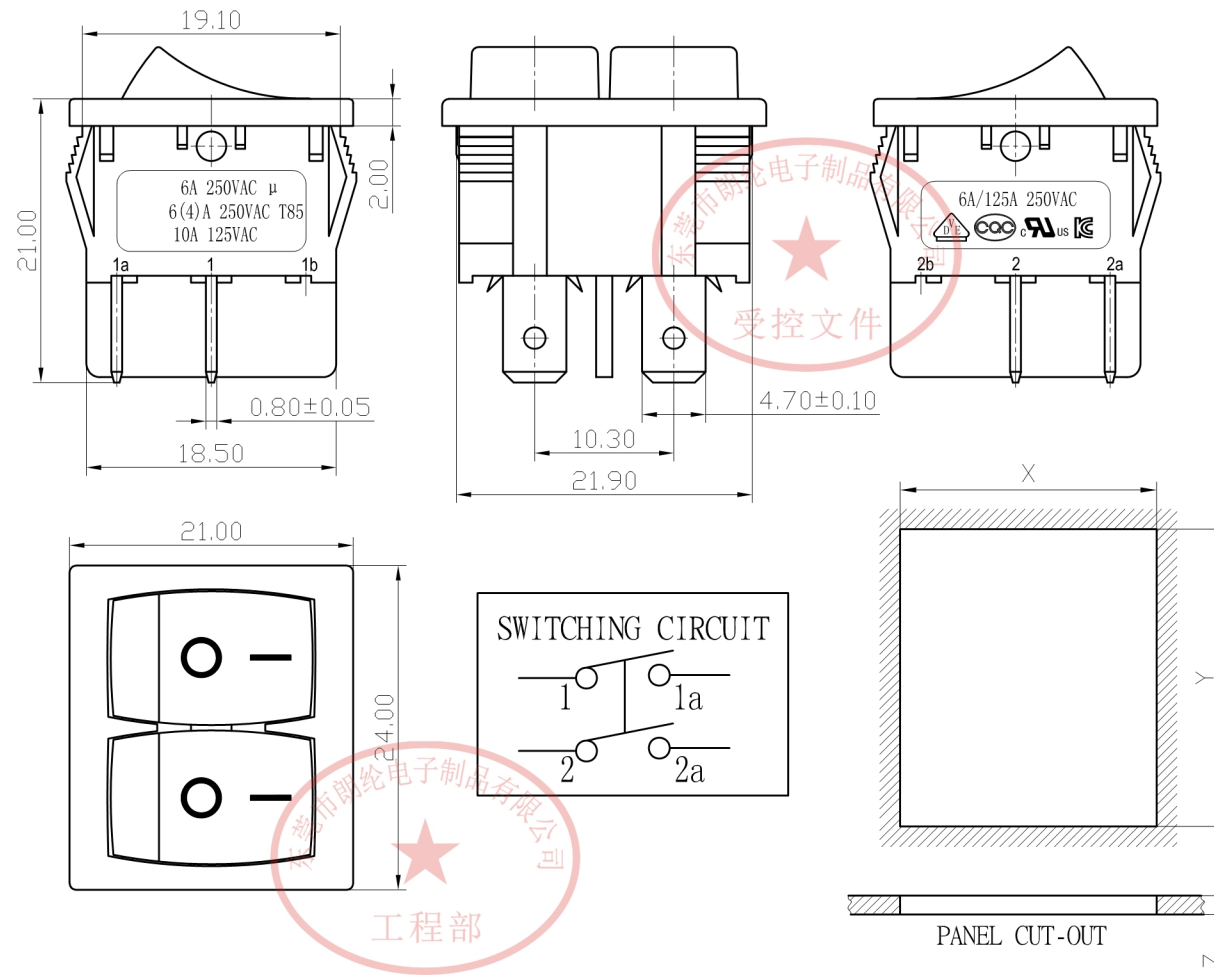

Rating:
CQC 6A 250V AC T85
6A/125A 250VAC
UL cUL 10A 125V AC/6A 250V AC
VDE 6(4)A 250V AC T85/55
KC 6(4)A 250V AC

Circuit Diagram: 4P ON-OFF

Terminal Strength: ≥80N

Electrical life: 3K601F1-2010016BB

Withstand Voltage: Withstand Voltage:1800VAC 1min
Terminals to Button:3000VAC 1min

Leakage Current: 1mA

Current resistance: ≤50mΩ(initial)

Insulation resistance: ≥100MΩ

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	21.90~22.10	18.9~19.1
1.25~2.00	21.90~22.10	19.1~19.2
2.00~3.00	21.90~22.10	19.3~19.4

A4				普通公差:		东莞市朗纶电子制品有限公司							
A3				COMMON TOLERANCE :		Dongguan langlun electronic products Co., Ltd							
A2				UP TO 5	±0.20	单位	mm	投影		品名	跷板开关	比例	1.5:1
A1				ABOVE 5 TO 30	±0.30	绘图	朱文林	核 对	吴路方	型号	3K601F1-2010016BB		
				ABOVE 30	±0.50	日期	2012.11.14	核 准	周培雷	图号	3K601F1-2010016BB		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	DATE		APPROVAL BY		DWG NO.			