


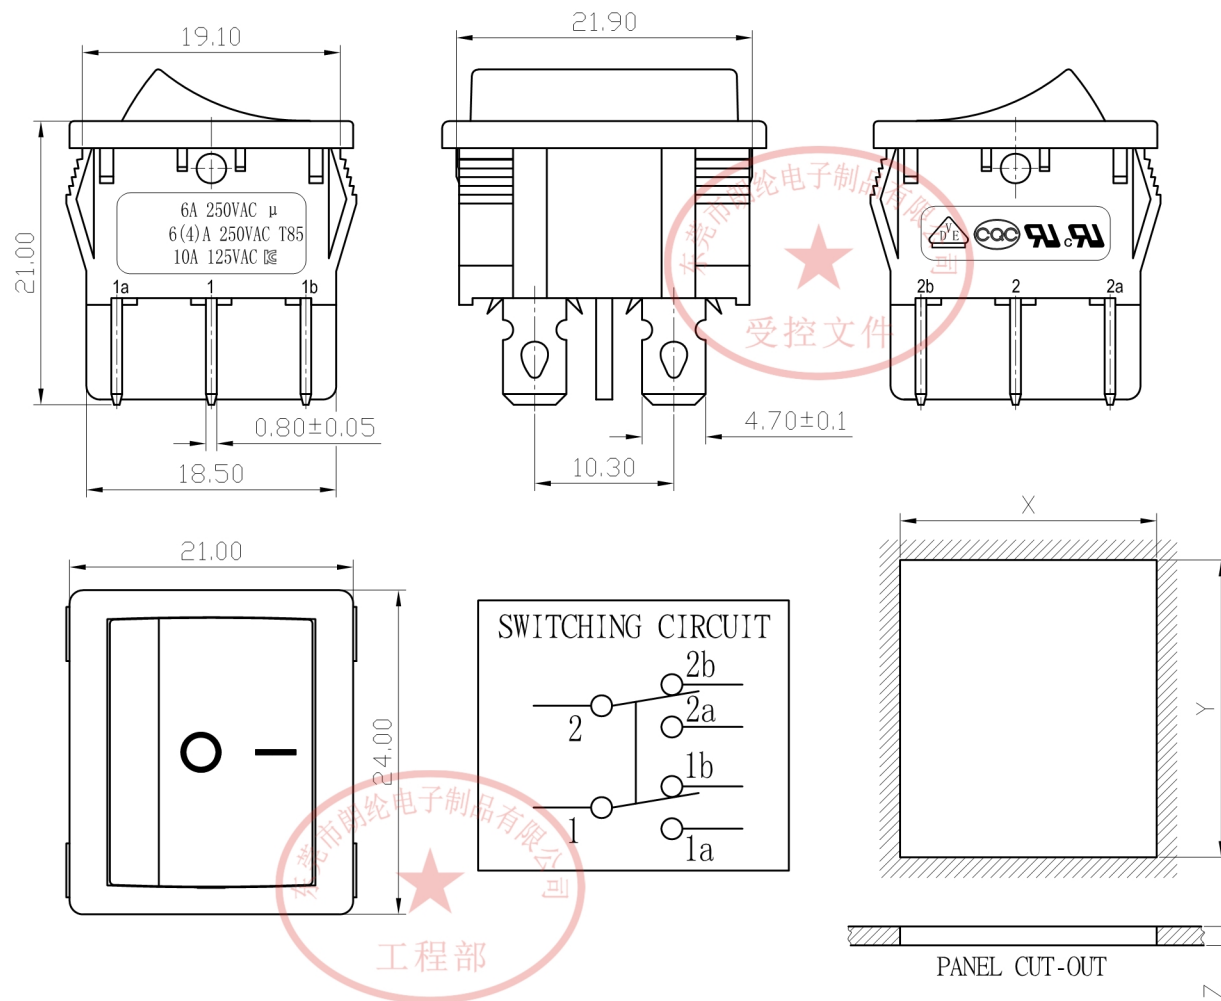

Rating:

CQC 6A 250V AC T85
6A/125A 250VAC
UL cUL 10A 125V AC / 6A 250V AC
VDE 6(4)A 250V AC T85/55
KC 6(4)A 250V AC

Circuit Diagram: 6P ON-ON

Terminal Strength: $\geq 80N$

Electrical life: ≥ 10000 cycles

Withstand Voltage: Withstand Voltage: 1800VAC 1min

Terminals to Button: 3000VAC 1min

Leakage Current: 1mA

Current resistance: $\leq 50m\Omega$ (initial)

Insulation resistance: $\geq 100M\Omega$

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	21.90~22.10	18.9~19.1
1.25~2.00	21.90~22.10	19.1~19.2
2.00~3.00	21.90~22.10	19.3~19.4

A4				普通公差:			东莞市朗纶电子制品有限公司						
A3				COMMON TOLERANCE:			Dongguan langlun electronic products Co., Ltd						
A2				UP TO 5	±0.20	单位	mm	投影		品名	跷板开关	比例	1.5:1
				ABOVE 5 TO 30	±0.30	UNIT				PRODUCT NAME			
A1				ABOVE 30	±0.50	绘图	朱文林	核对	吴路方	型号	3K601F-2020011BB		
						DRAWN BY		CHECKED BY		MODEL NO.			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	2012.11.14	核准	周培雷	图号	3K601F-2020011BB		
						DATE		APPROVAL BY		DWG NO			