

Rating:

CQC 3A 250V AC 3A/40A 250V AC  
 UL cUL 6A 125V AC/3A 250V AC T125  
 VDE 3A 250V AC

Circuit Diagram: 2P ON-OFF

Terminal Strength:  $\geq 40N$

Electrical life:  $\geq 10000$  cycles

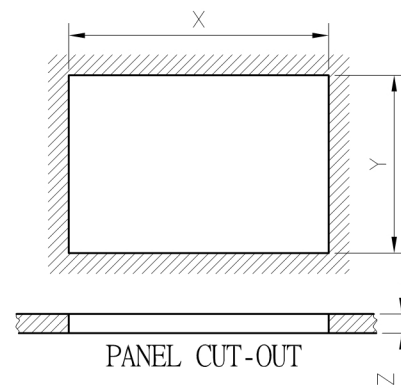
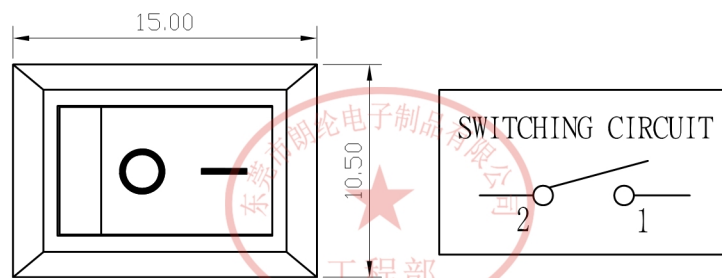
Withstand Voltage: Withstand Voltage:1800VAC 1min

Terminals to Button:3000VAC 1min



Leakage Current: 1mA

Current resistance:  $\leq 50m\Omega$ (initial)

Insulation resistance:  $\geq 100M\Omega$



PANEL CUT-OUT		
Z	Y	X
0.70~1.25	9.00~9.10	13.5~13.6
1.25~2.00	9.00~9.10	13.6~13.7

A4				普通公差:	 <b>东莞市朗纶电子制品有限公司</b> <b>Dongguan langlun electronic products Co., Ltd</b>								
A3				COMMON TOLERANCE:		单位	mm	投影		品名	跷板开关	比例	2.5:1
A2				UP TO 5		$\pm 0.20$	UNIT	PROJECTED	核对	型号			
A1				ABOVE 5 TO 30		$\pm 0.30$	绘图	朱文林	核	吴路方	3K601H-1010015BB		
				ABOVE 30	$\pm 0.50$	DRAWN BY		核	周培雷	图号			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	$\pm 5^\circ$	日期	2012.11.14	核准		DWG NO.			
						DATE		APPROVAL BY					