
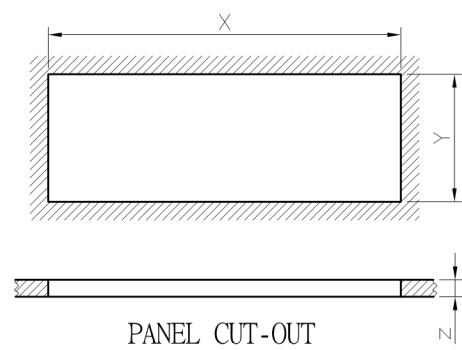





Rating:
 COC 16(4)A 250V AC T85
 UL cUL 16A 125V AC/16A 250V AC T125
 VDE 16(4)A 250V AC T85

Circuit Diagram: 2P ON-OFF
 Terminal Strength: ≥80N
 Electrical life: ≥10000 cycles
 Withstand Voltage: Withstand Voltage:1800VAC 1min
 Terminals to Button:3000VAC 1min
 Leakage Current: 1mA
 Current resistance: ≤50mΩ(initial)
 Insulation resistance: ≥100MΩ

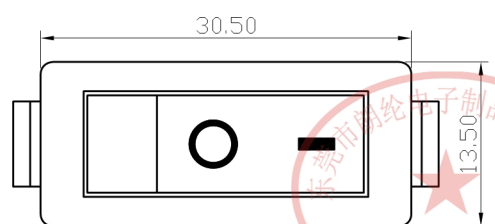

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	10.50~10.70	28.9~29.1
1.25~2.00	10.50~10.70	29.1~29.2
2.00~3.00	10.50~10.70	29.2~29.3

工程部

A4				普通公差:	 东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd								
A3				COMMON TOLERANCE:		单位	mm	投影		品名	跷板开关	比例	2:1
A2				UP TO 5		±0.20	UNIT		核 对	吴路方	型号	3K606-1010011CBB	
A1				ABOVE 5 TO 30		±0.30	绘图	朱文林	核 对	吴路方	MODEL NO.	3K606-1010011CBB	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	2012.11.14	核 准	周培雷	图号	3K606-1010011CBB		