

Rating:

CQC 16(4)A 250V AC T85
 UL cUL 16A 125V AC/16A 250V AC T125
 VDE 16(4)A 250V AC T85

Circuit Diagram: 3P ON-OFF-ON

Terminal Strength: $\geq 80N$

Electrical life: ≥ 10000 cycles



Withstand Voltage: Withstand Voltage:1800VAC 1min

Terminals to Button:3000VAC 1min

Leakage Current: 1mA



Current resistance: $\leq 50m\Omega$ (initial)

Insulation resistance: $\geq 100M\Omega$

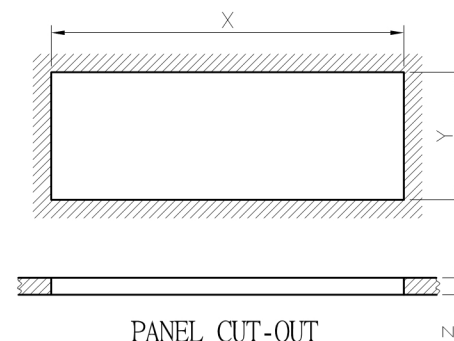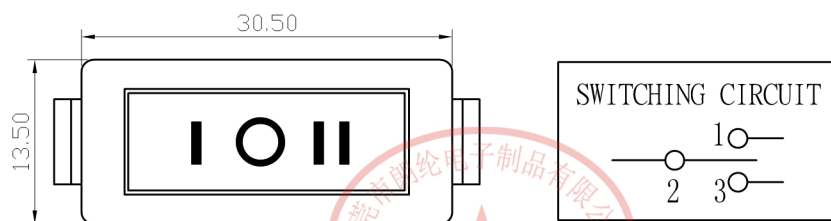

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	10.50~10.70	28.9~29.1
1.25~2.00	10.50~10.70	29.1~29.2
2.00~3.00	10.50~10.70	29.2~29.3

工程部

A4				普通公差:	 3K-KAMING	东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd							
A3				COMMON TOLERANCE:		单位	mm	投影		品名	跷板开关	比例	2:1
A2				UP TO 5		± 0.20	UNIT	PROJECTED	CHECKED BY	吴路方	型号	3K606-1030041CBB	
A1				ABOVE 5 TO 30		± 0.30	绘图	朱文林	CHECKED BY	吴路方	MODEL NO.	3K606-1030041CBB	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	$\pm 5^\circ$	日期	2012.11.14	核准	周培雷	图号	3K606-1030041CBB		
						DATE		APPROVAL BY		DWG NO.			