

Rating:

CQC 16(4)A 250V AC T85
 UL cUL 16A 125V AC/16A 250V AC T125
 VDE 16(4)A 250V AC T85

Circuit Diagram: 6P ON-ON

Terminal Strength: $\geq 80N$

Electrical life: ≥ 10000 cycles




Withstand Voltage: Withstand Voltage:1800VAC 1min

Terminals to Button:3000VAC 1min

Leakage Current: 1mA


Current resistance: $\leq 50m\Omega$ (initial)

Insulation resistance: $\geq 100M\Omega$

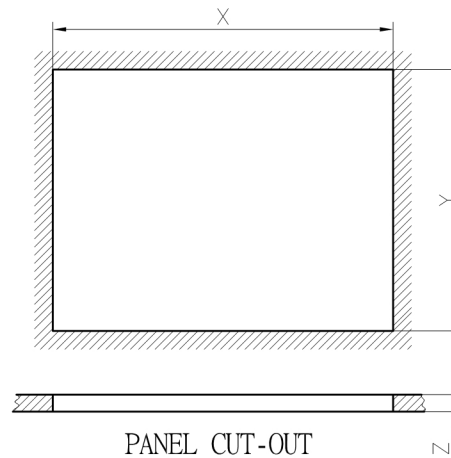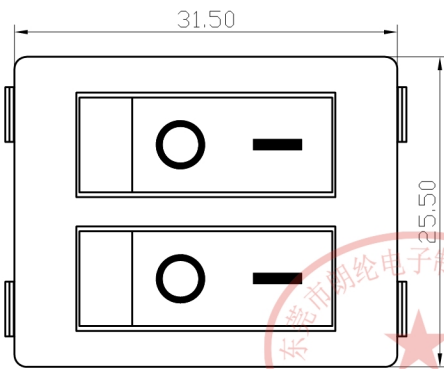

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	21.90~22.10	27.9~28.1
1.25~2.00	21.90~22.10	27.1~28.2
2.00~3.00	21.90~22.10	27.2~28.3

工程部

A4				普通公差:	 东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd							
A3			COMMON TOLERANCE:	单位		mm	投影		品名	跷板开关	比例	1.5:1
A2			UP TO 5	± 0.20		UNIT	核 对	吴路方	型号	3K606A-2020011CBB		
A1			ABOVE 5 TO 30	± 0.30		绘图	朱文林	核 准	周培雷	图号	3K606A-2020011CBB	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	$\pm 5^\circ$	日期	2012.11.14	核 准	周培雷	图号	3K606A-2020011CBB	