
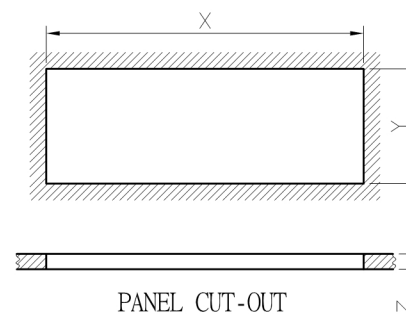

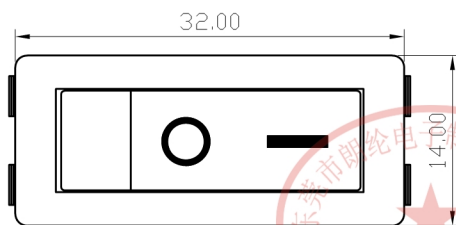
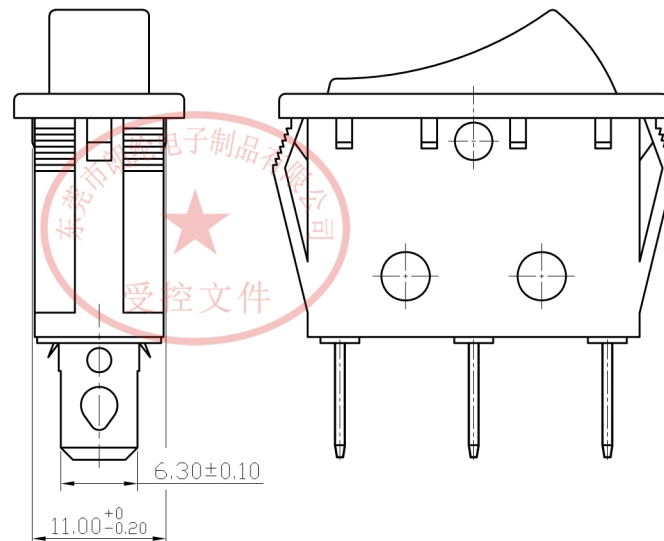


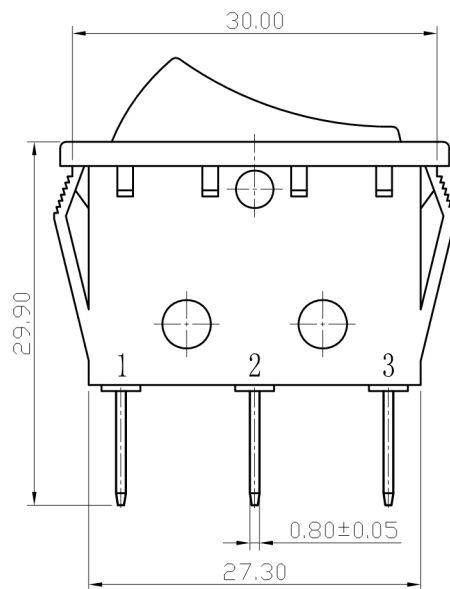

Rating:

CQC 16(4)A 250V AC T85
UL cUL 16A 125V AC/16A 250V AC T125
VDE 16(4)A 250V AC T85

Circuit Diagram: 3P ON-OFF

Terminal Strength: $\geq 80N$

Electrical life: ≥ 10000 cycles

Withstand Voltage: Withstand Voltage: 1800VAC 1min

Terminals to Button: 3000VAC 1min

Leakage Current: 1mA

Current resistance: $\leq 50m\Omega$ (initial)

Insulation resistance: $\geq 100M\Omega$

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	11.00~11.20	29.9~30.1
1.25~2.00	11.00~11.20	30.1~30.2
2.00~3.00	11.00~11.20	30.2~30.3

A4				普通公差:	 3K-KAMING 单位 mm 投影 品名 跷板开关 比例 1:1.5
A3				COMMON TOLERANCE:	
A2				UP TO 5 ± 0.20	
A1				ABOVE 5 TO 30 ± 0.30	
				ABOVE 30 ± 0.50	型号 3K606B-1010011CBB 图号 3K606B-1010011CBB
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR $\pm 5^\circ$	