



Model code
产品代码

Rated current
额定电流

Stud size
螺柱尺寸

Terminal hdwr
端子配件

Hardware pack
配件包装

Customer Code
客户要求


tarpaulin
防水帽

REACH


◆ 主要技术参数 Specification

额定电流 Rated Current	30~ 200A @48Vdc
断路容量 interrupting capacity	5KA @32Vdc; 3KA@48Vdc
外壳材质 Housing Material	Phenolic 94-V0
防水等级 Splash and dust proof	IP67
工作温度 Operating temperature	-32°C ~82°C (-25°F ~ 180°F)
扭力 Torque rating	50磅 (5.6Nm) 最大 50 in-lb (5.6Nm) max
符合标准 Standard	SAE J1625; SAE J1171; UL1500 (Ignition Protected)
操作方式 Method of Operation	R、J、S TYPE


◆ 温度曲线 Temperature derating curves

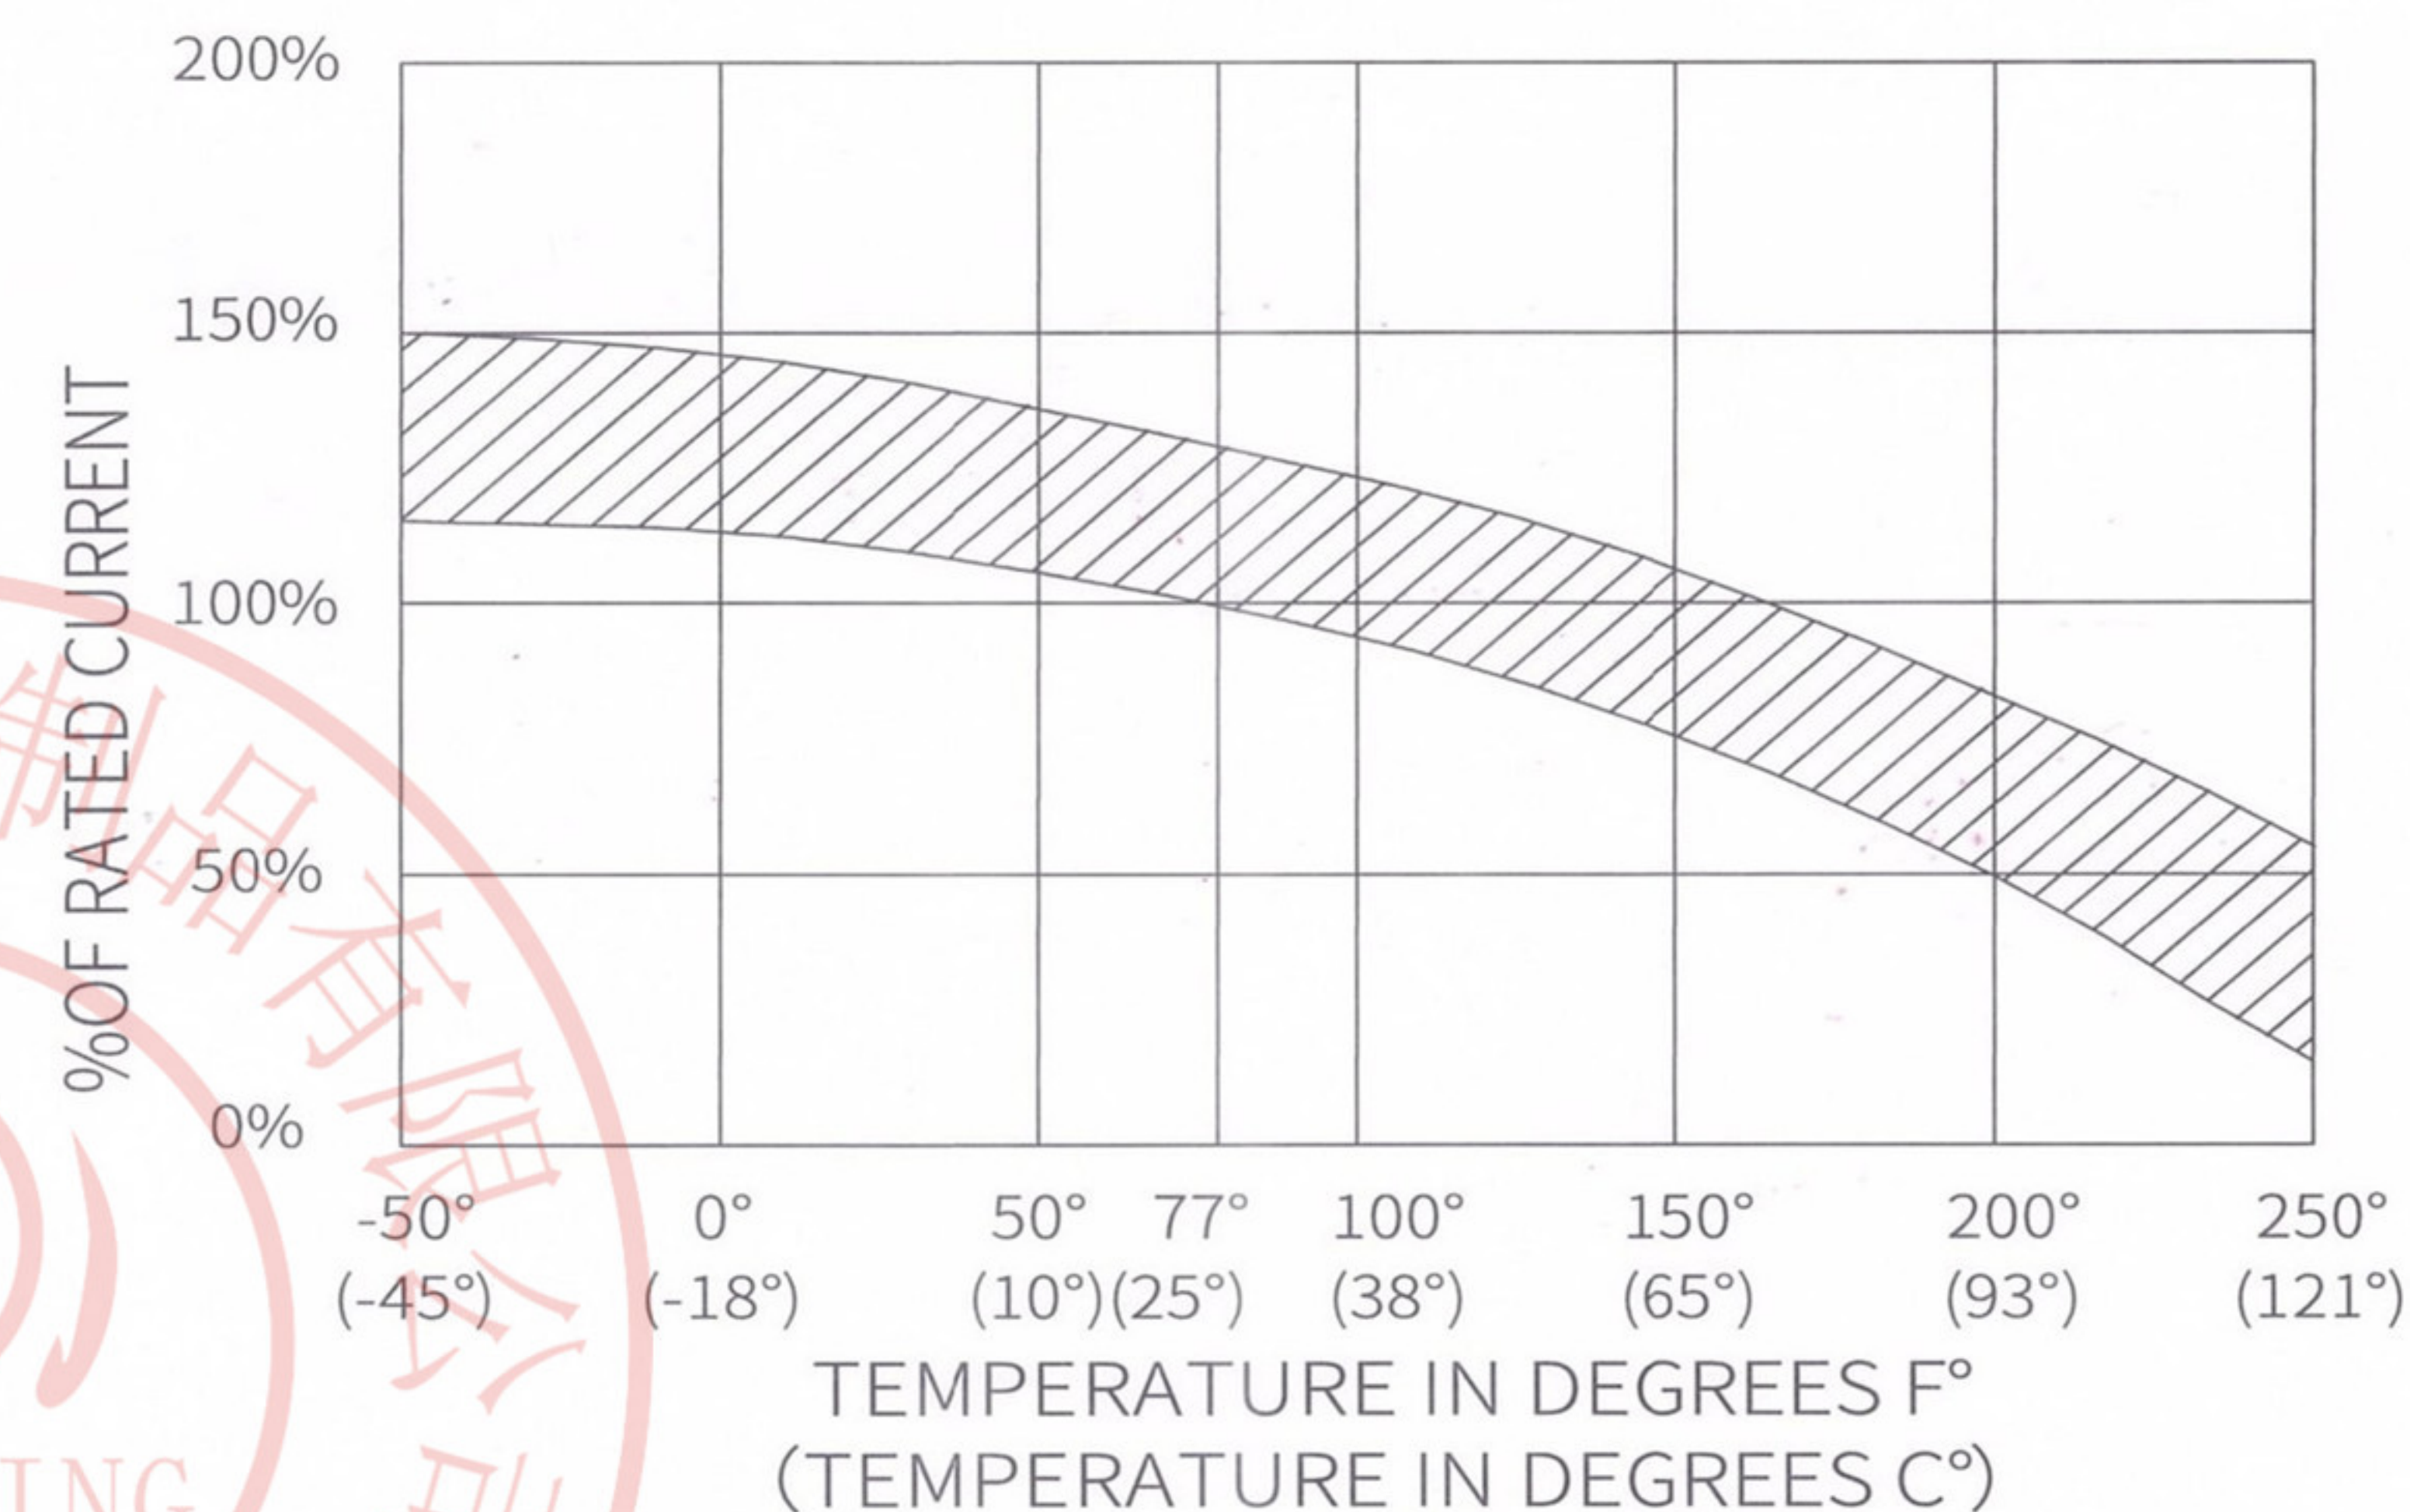


◆ 时间-电流特性曲线 @ +25°C Time VS. Current Trip Curve @ +25°C

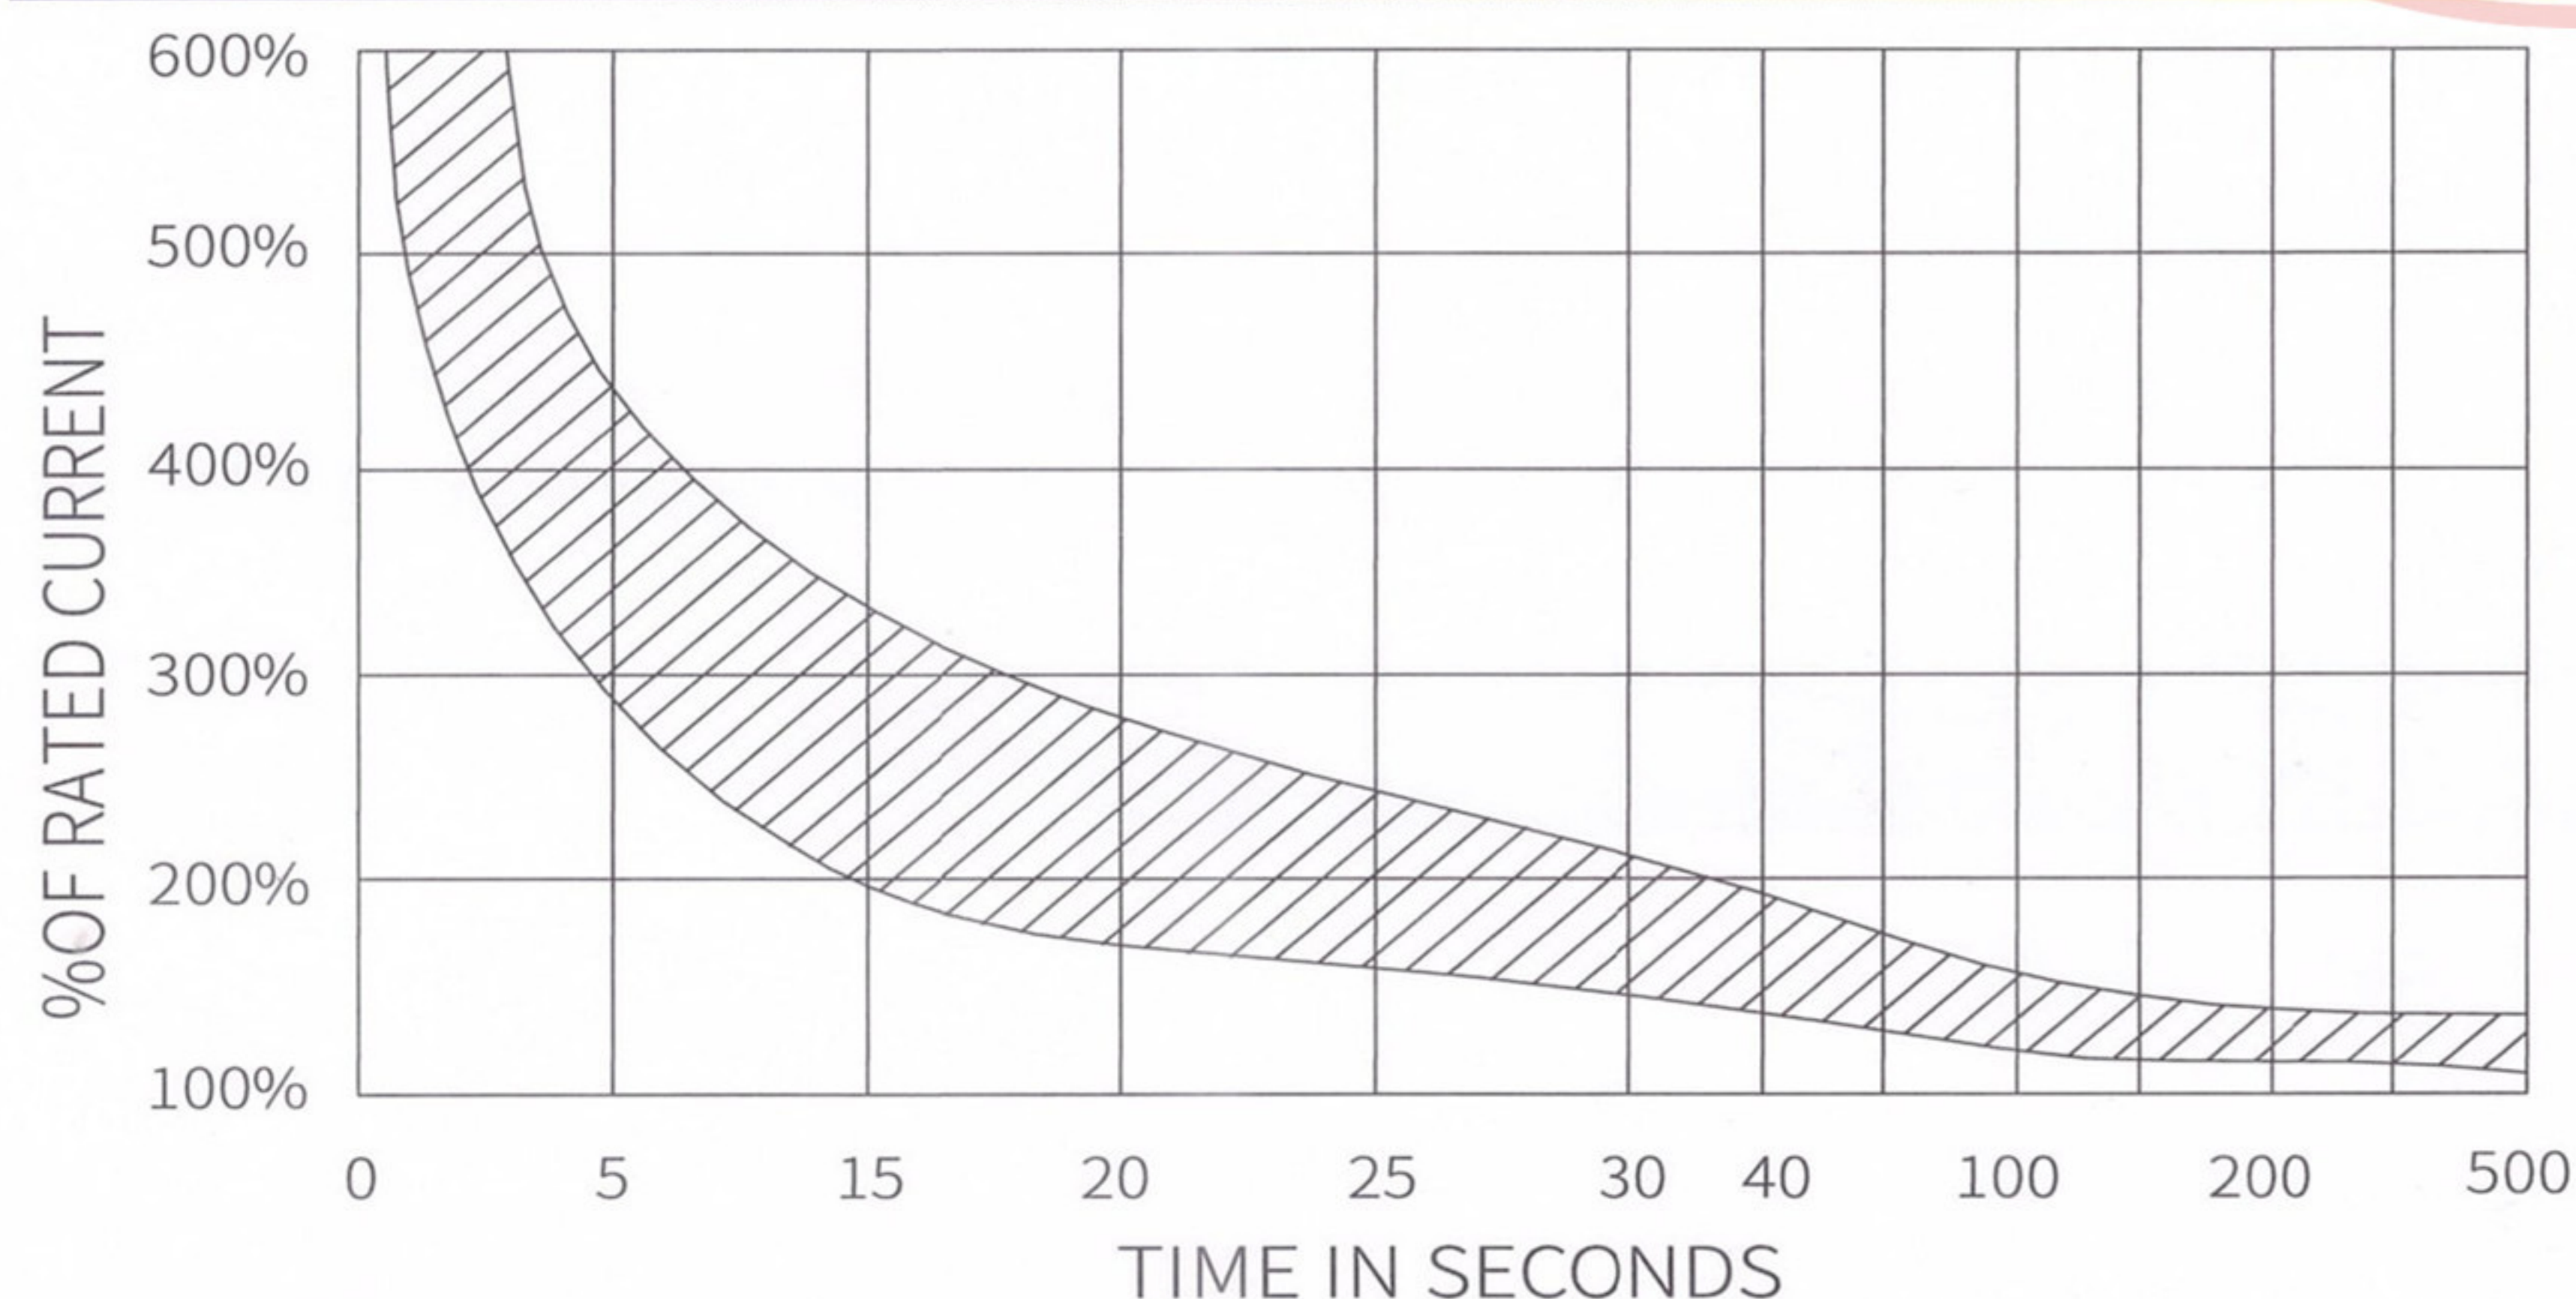


Type 1 自动复位 Auto Reset

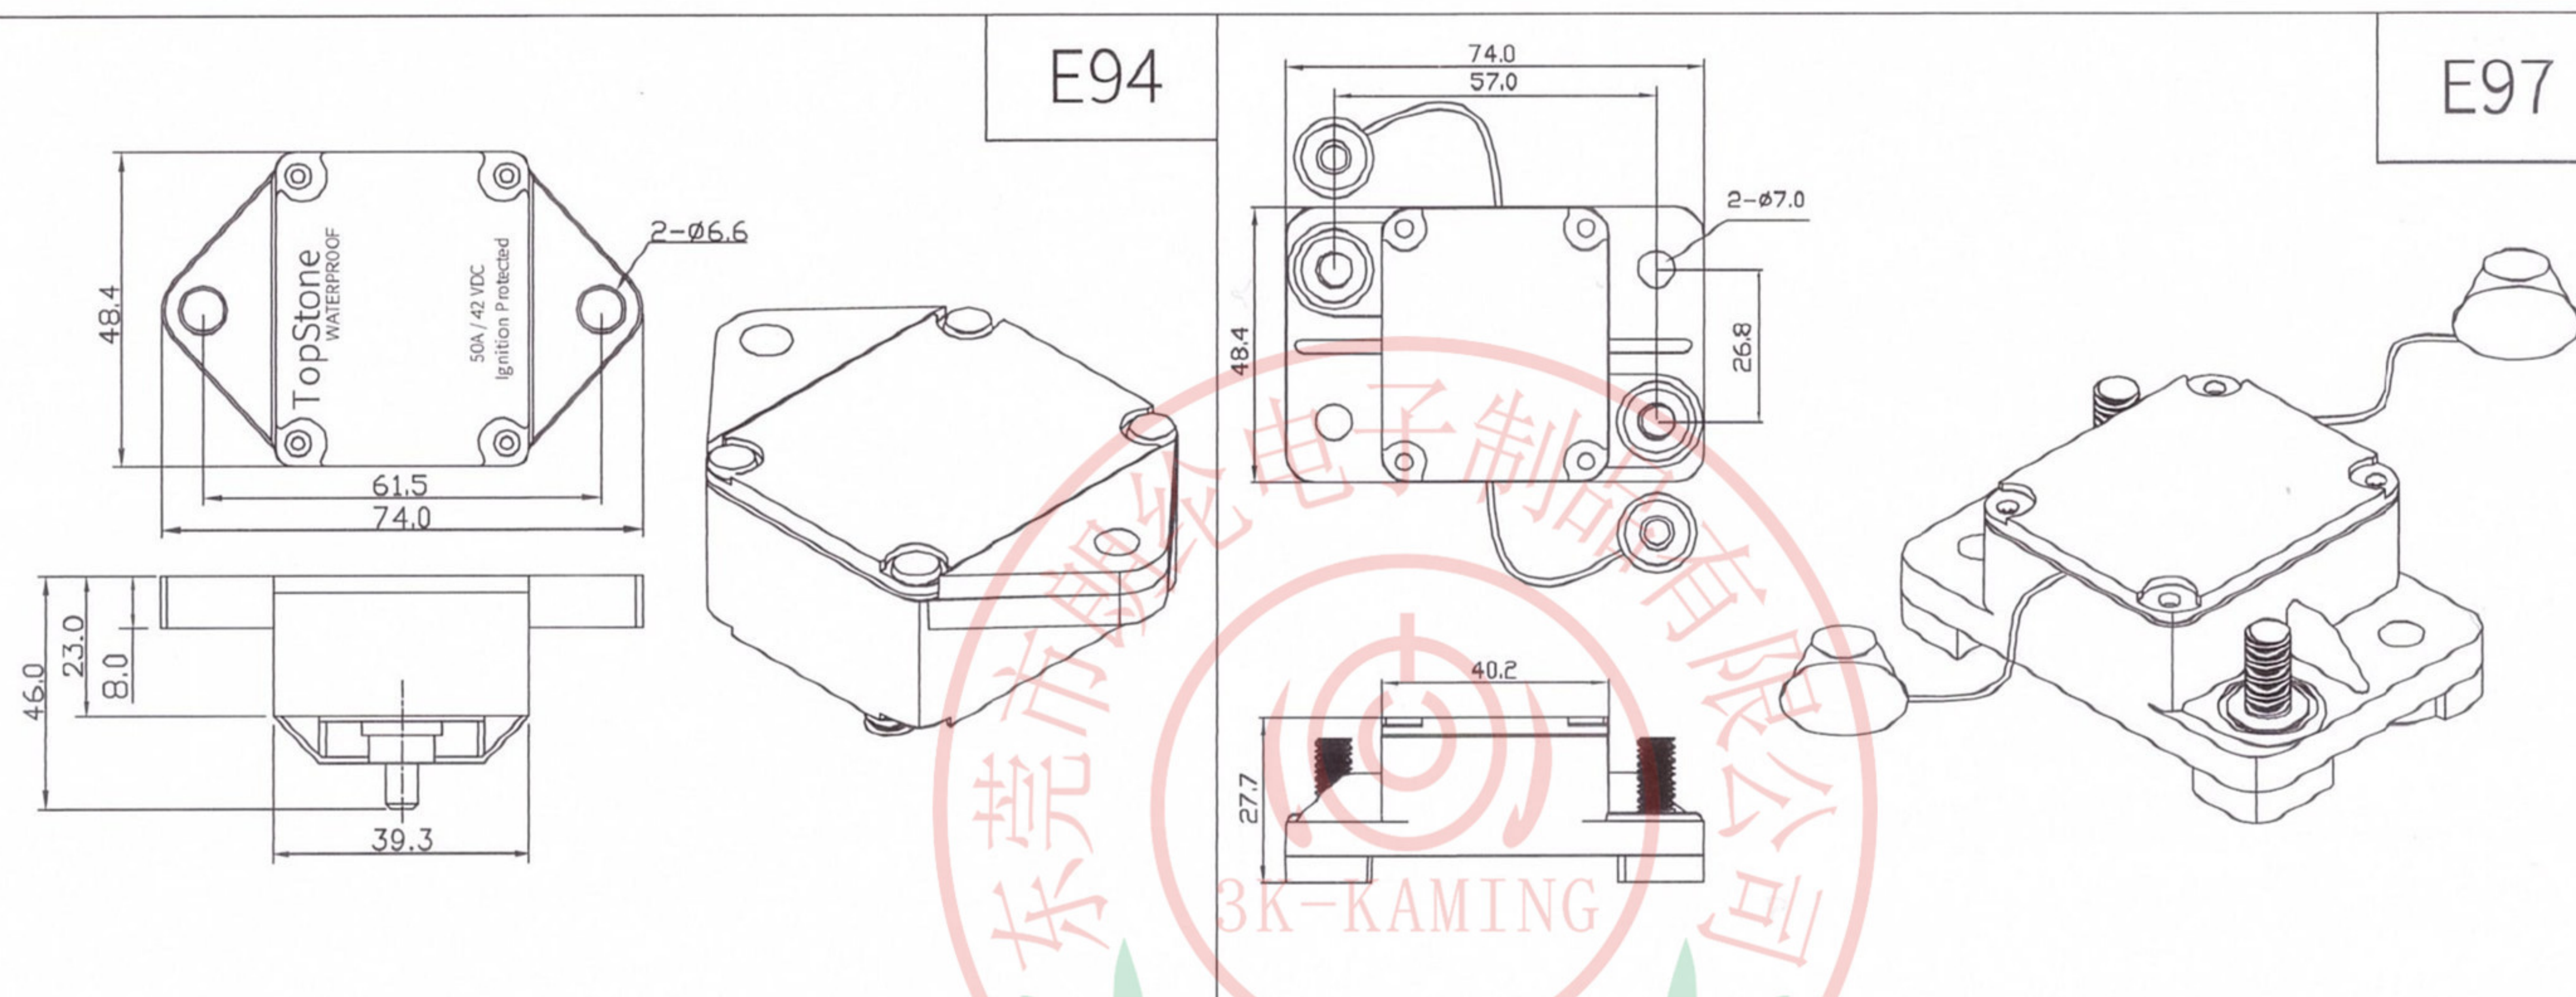



Type 2 手动复位 Manual Reset

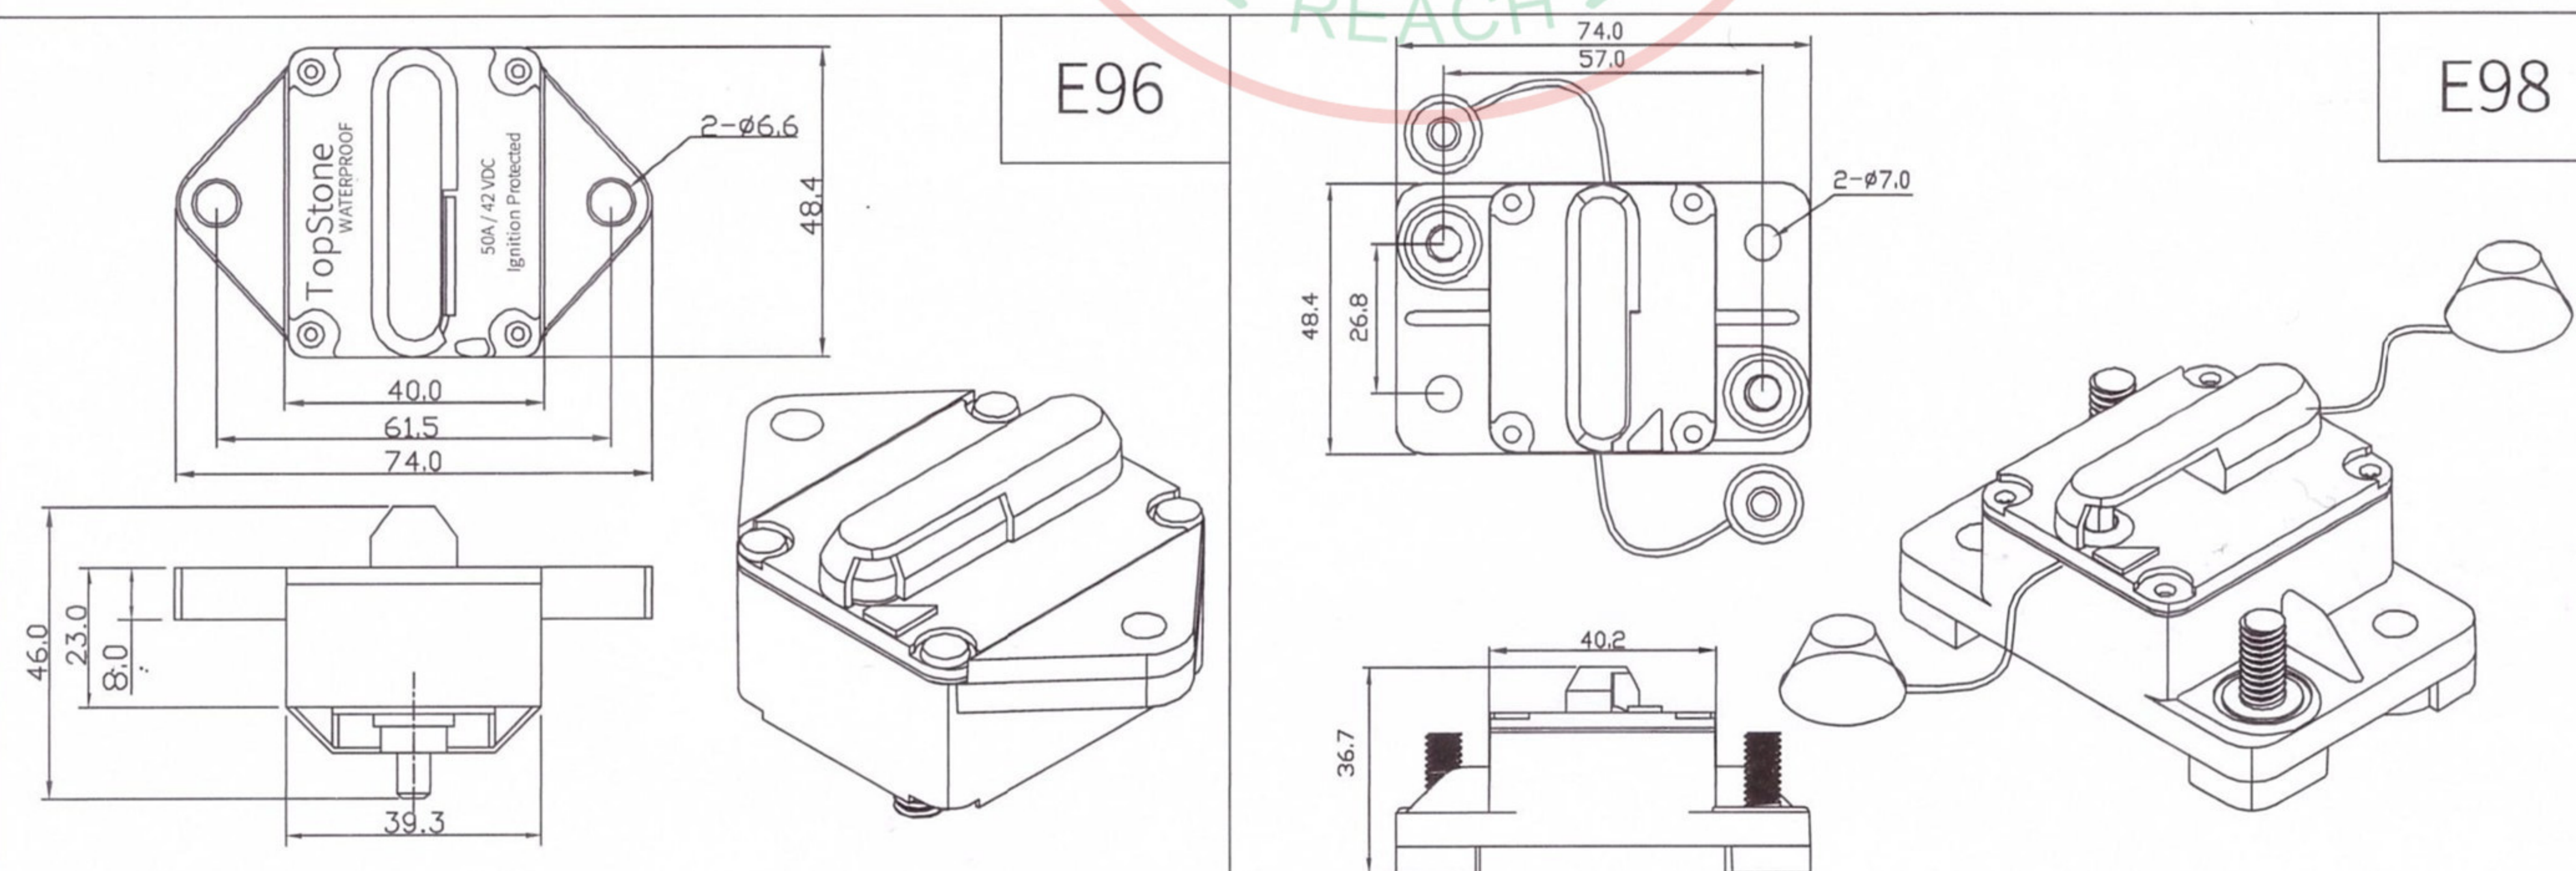


Type 3 手动复位(可切换) Manual Reset (Switchable)

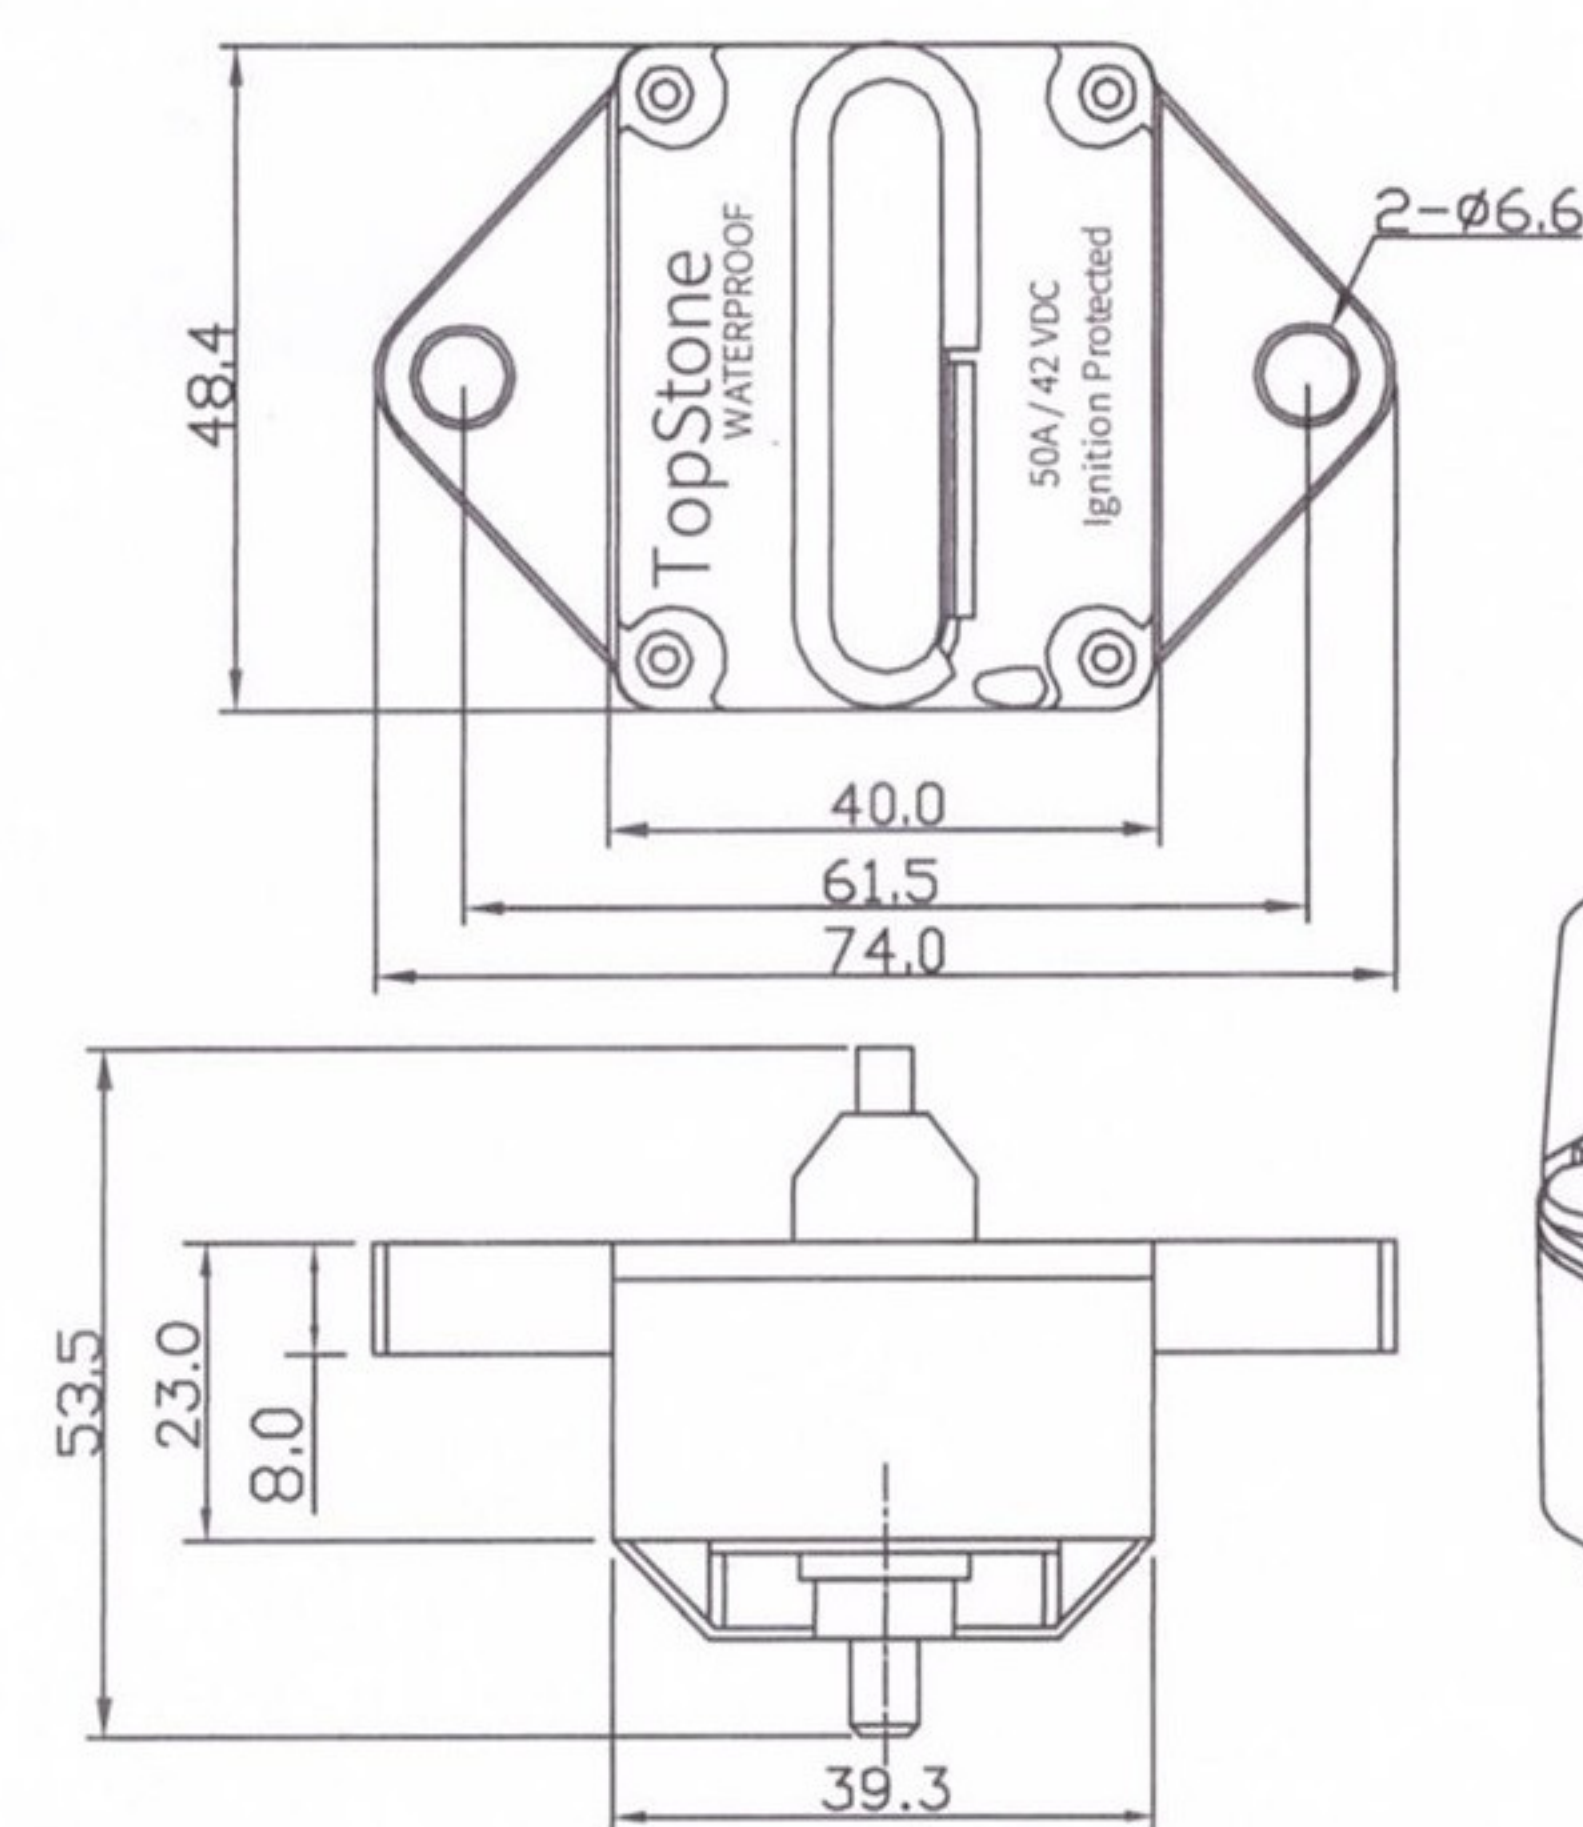

E96

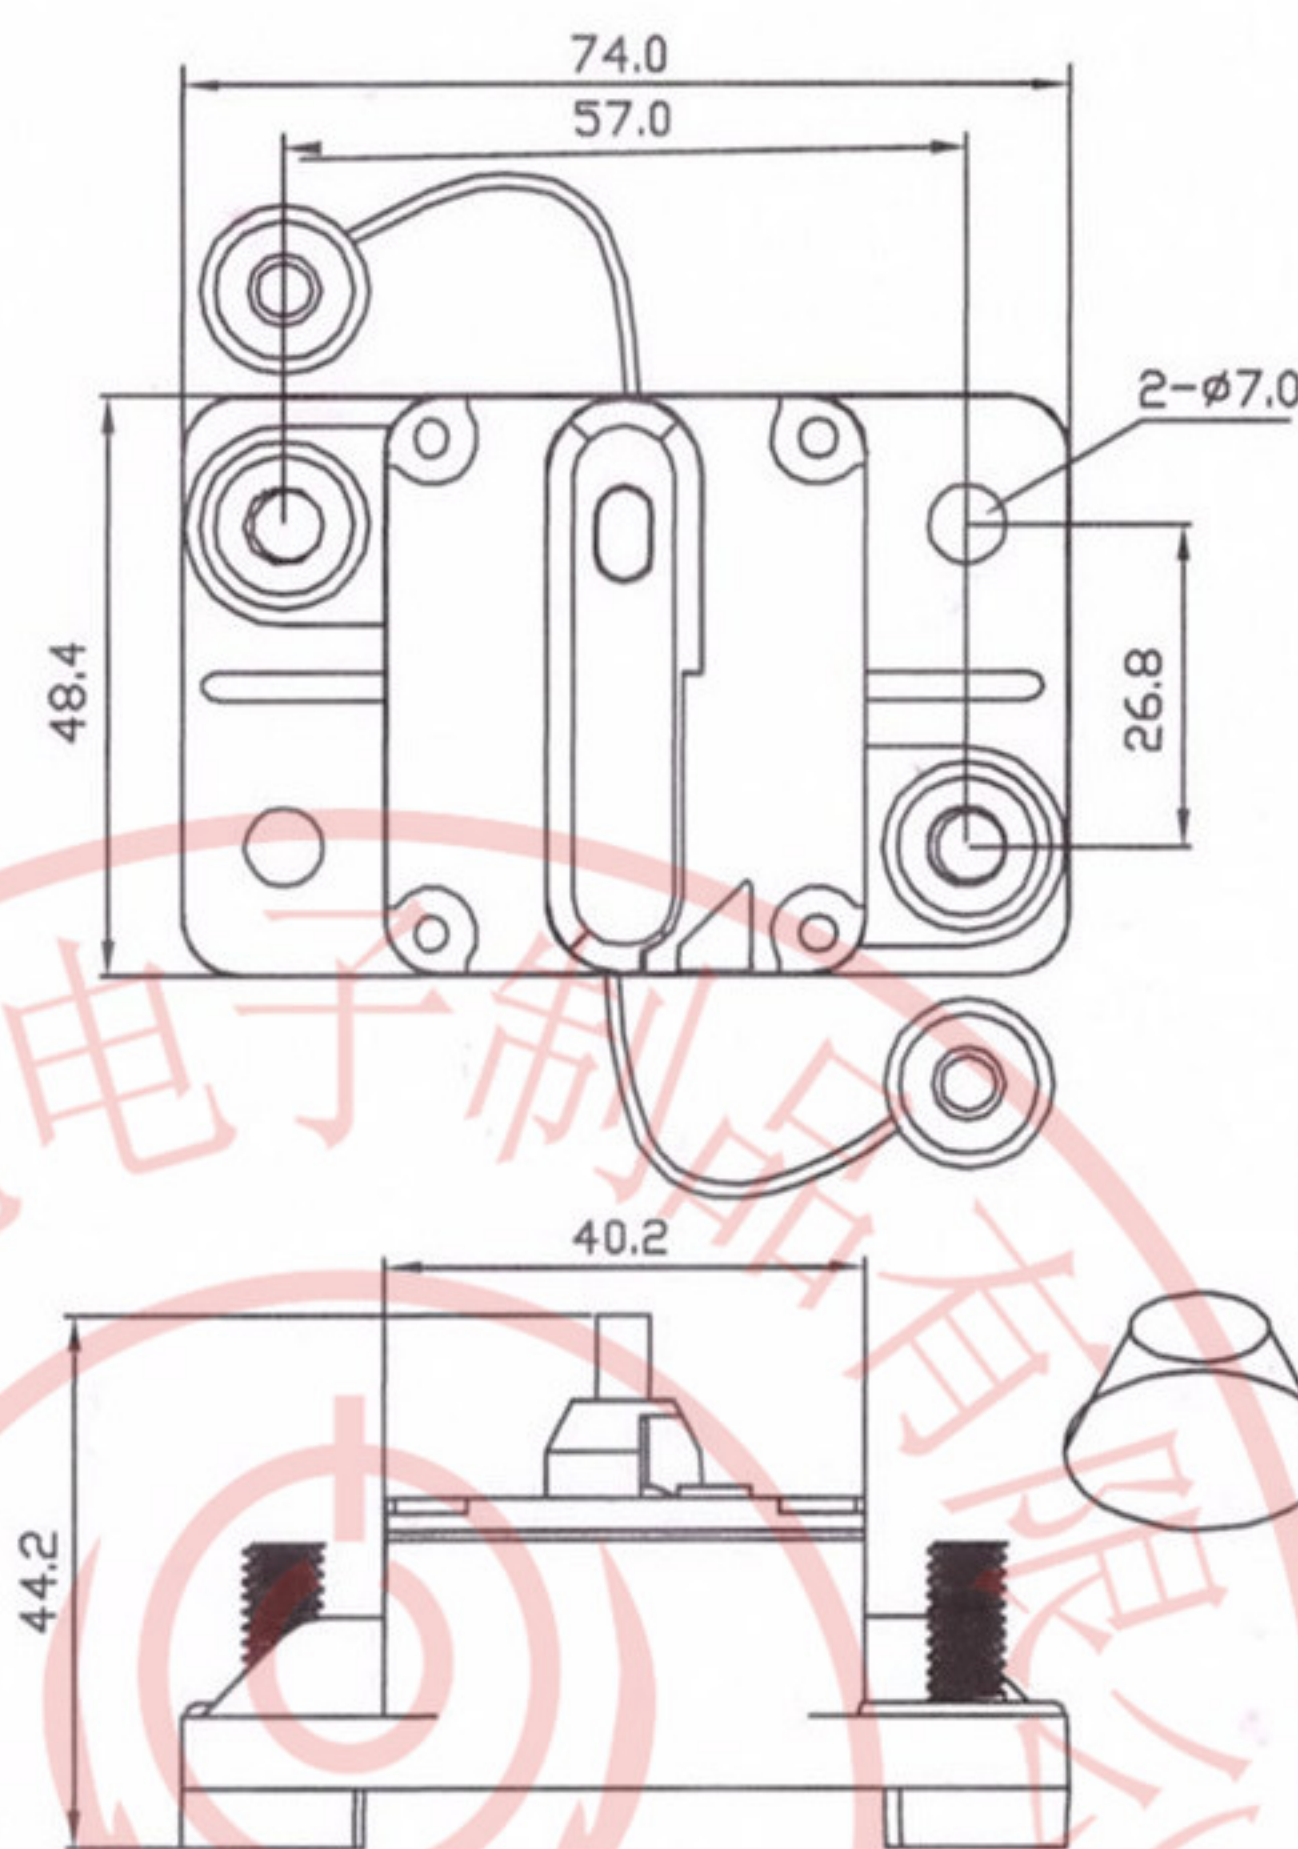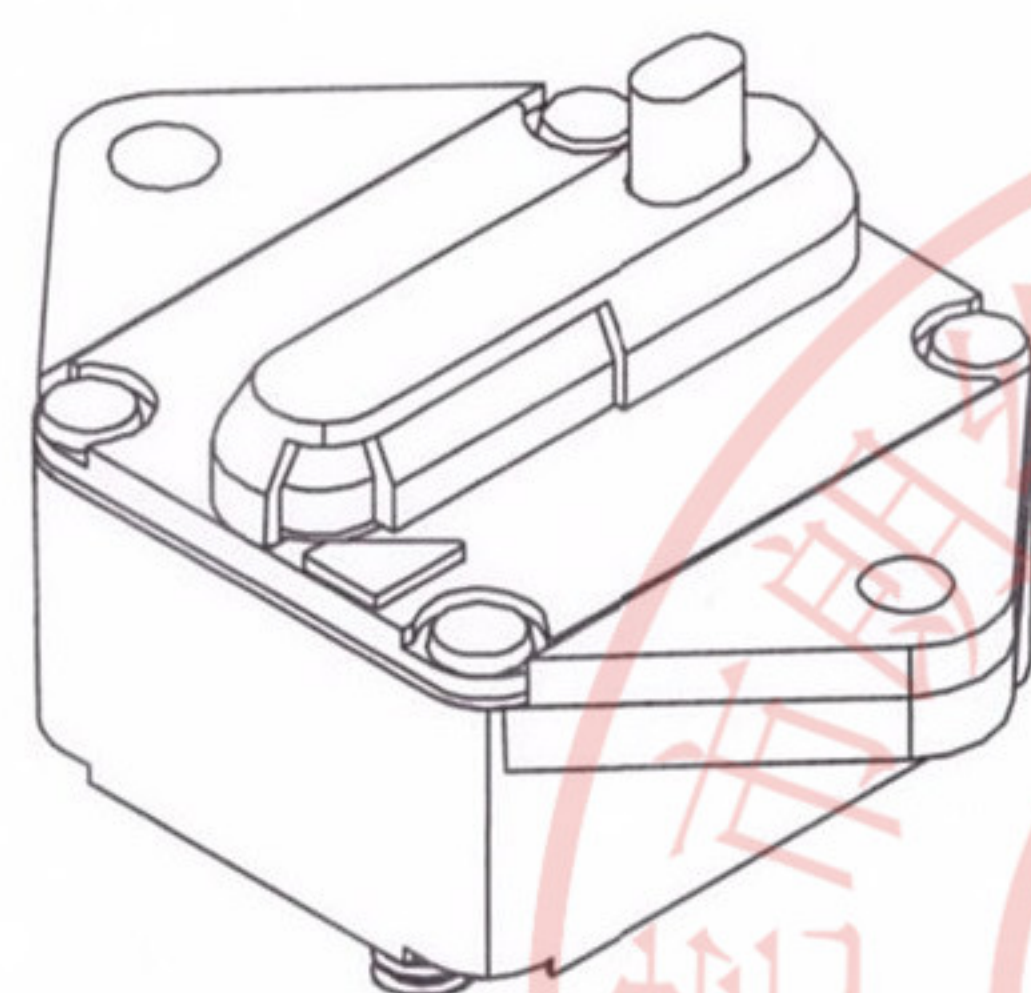


E99

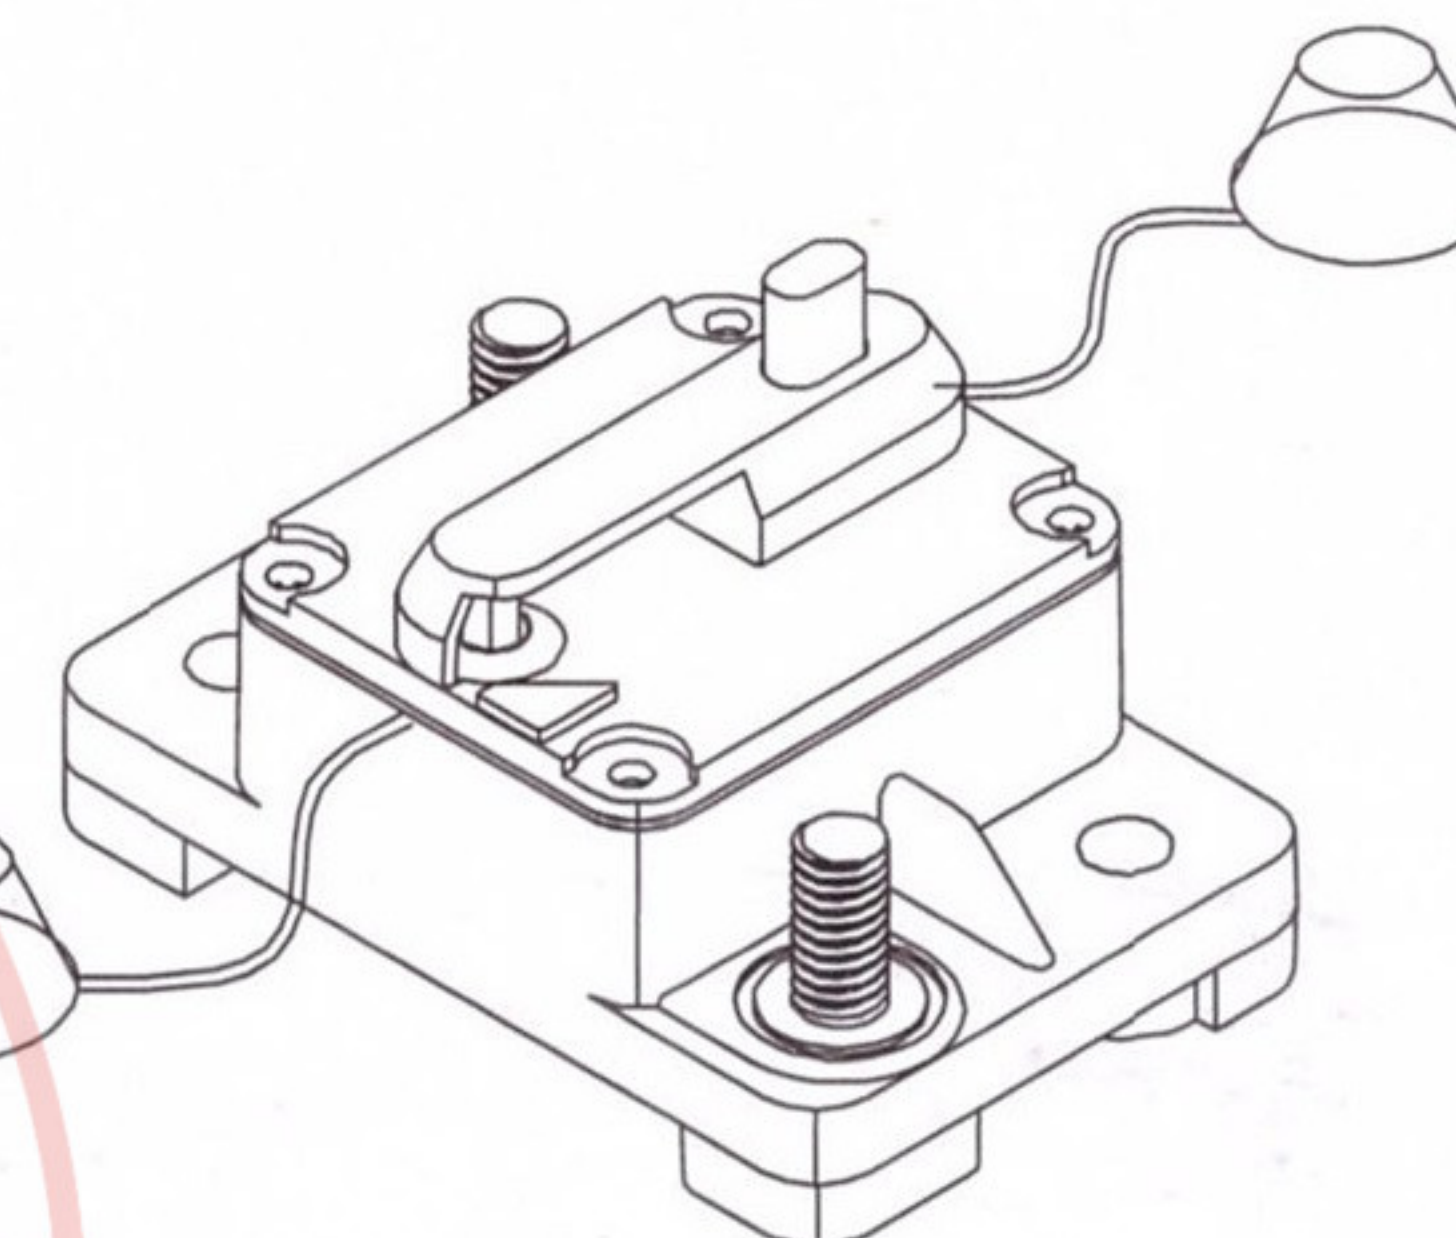


面板安装式
Panel Mount

表面安装式
surface Mount

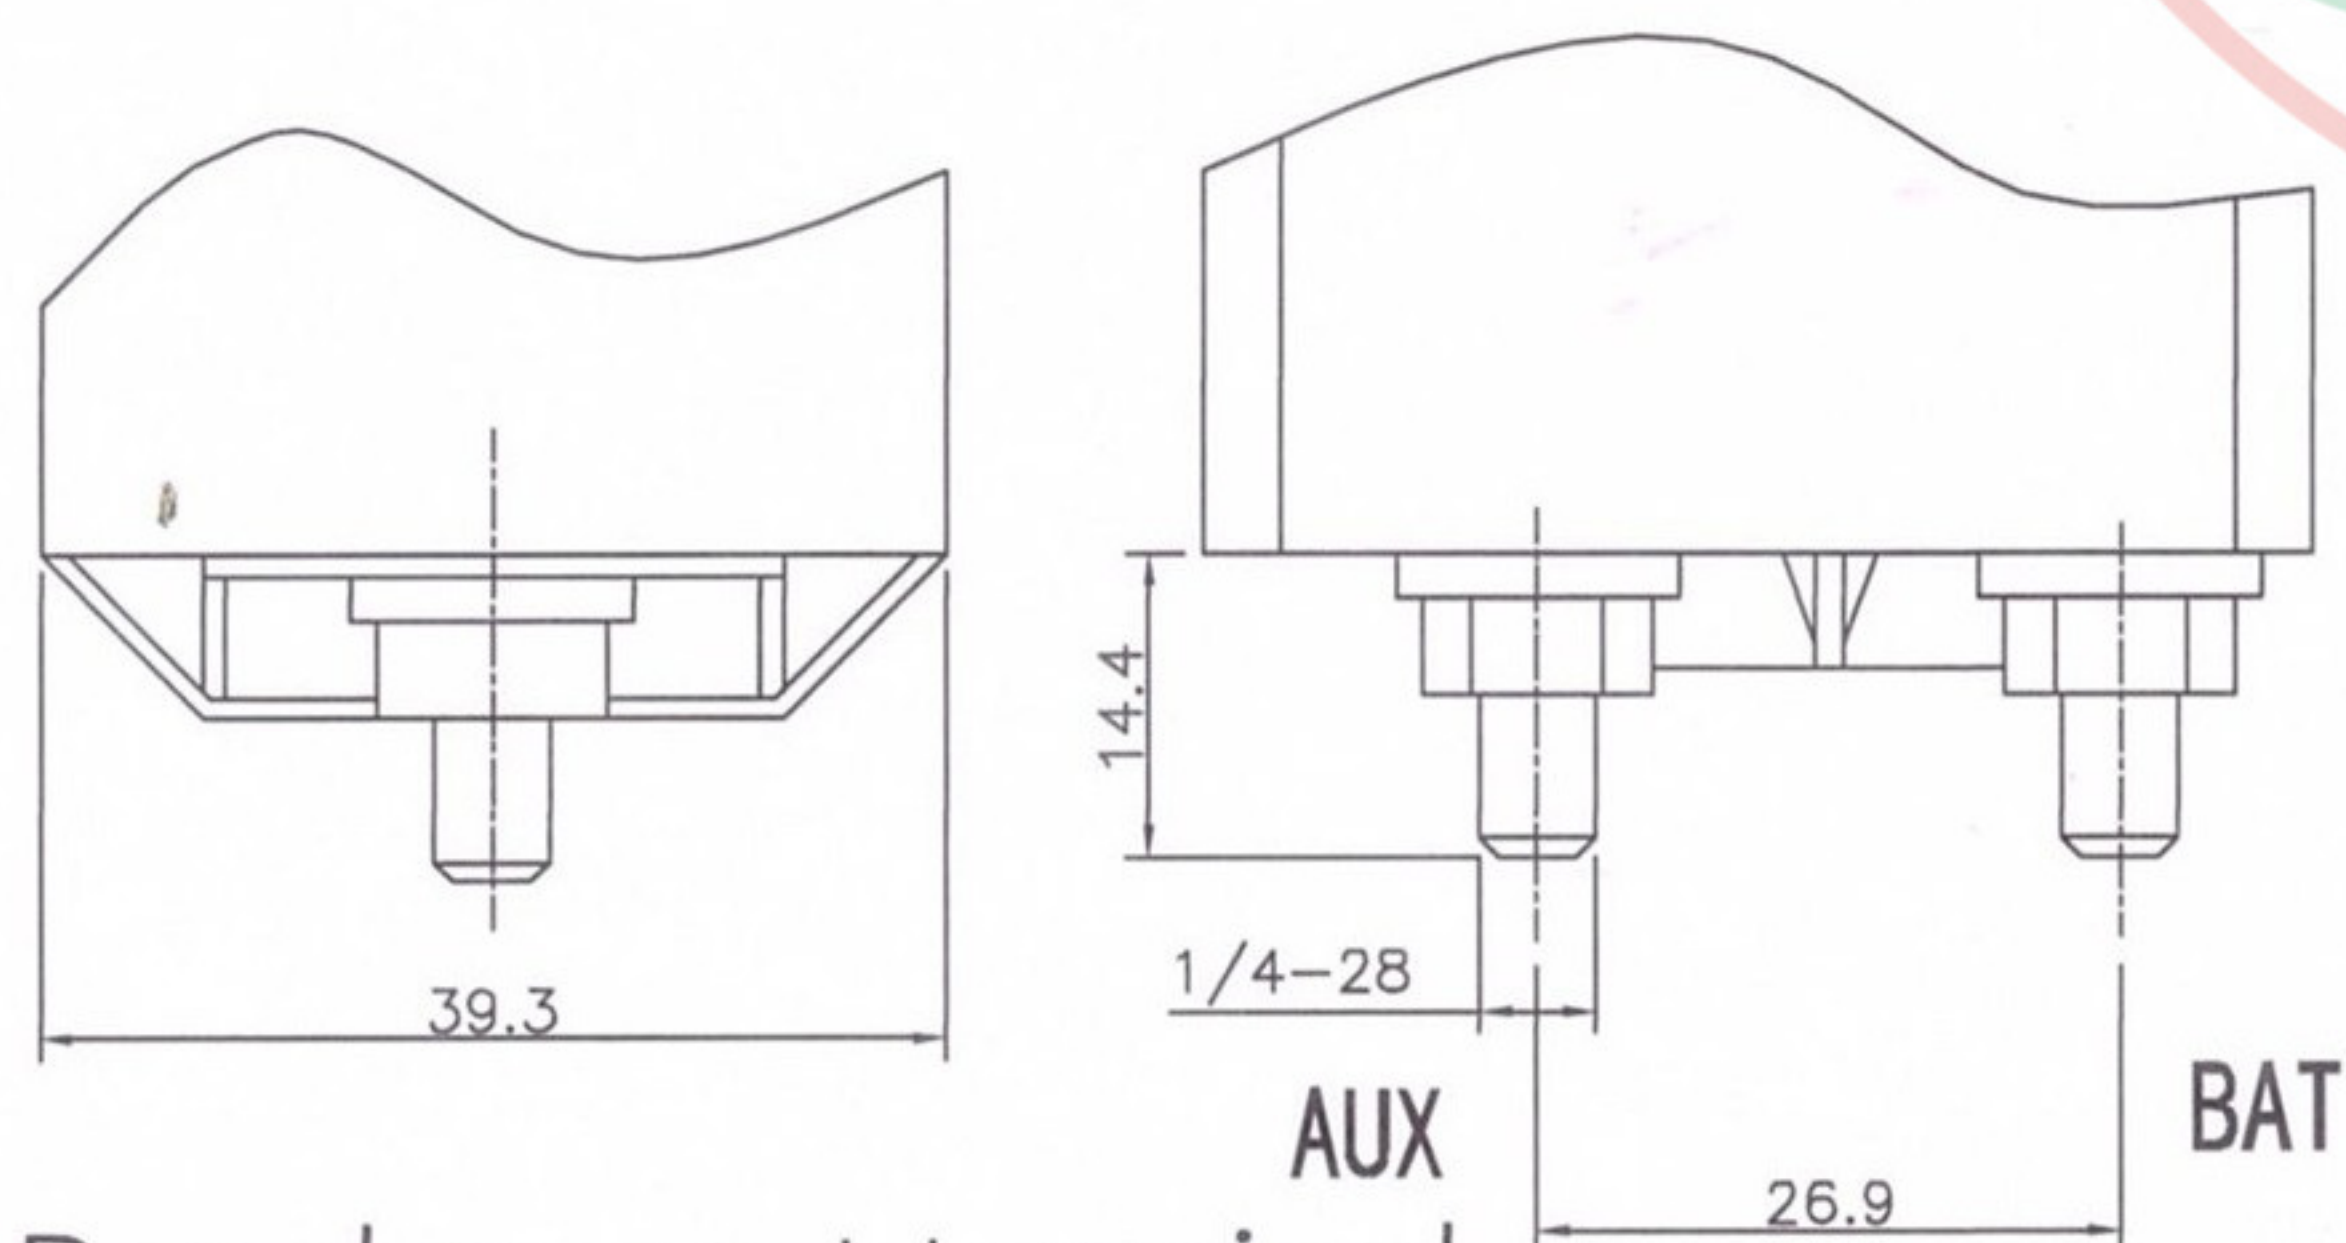

Panel mount terminal
(E94、E95、E96)

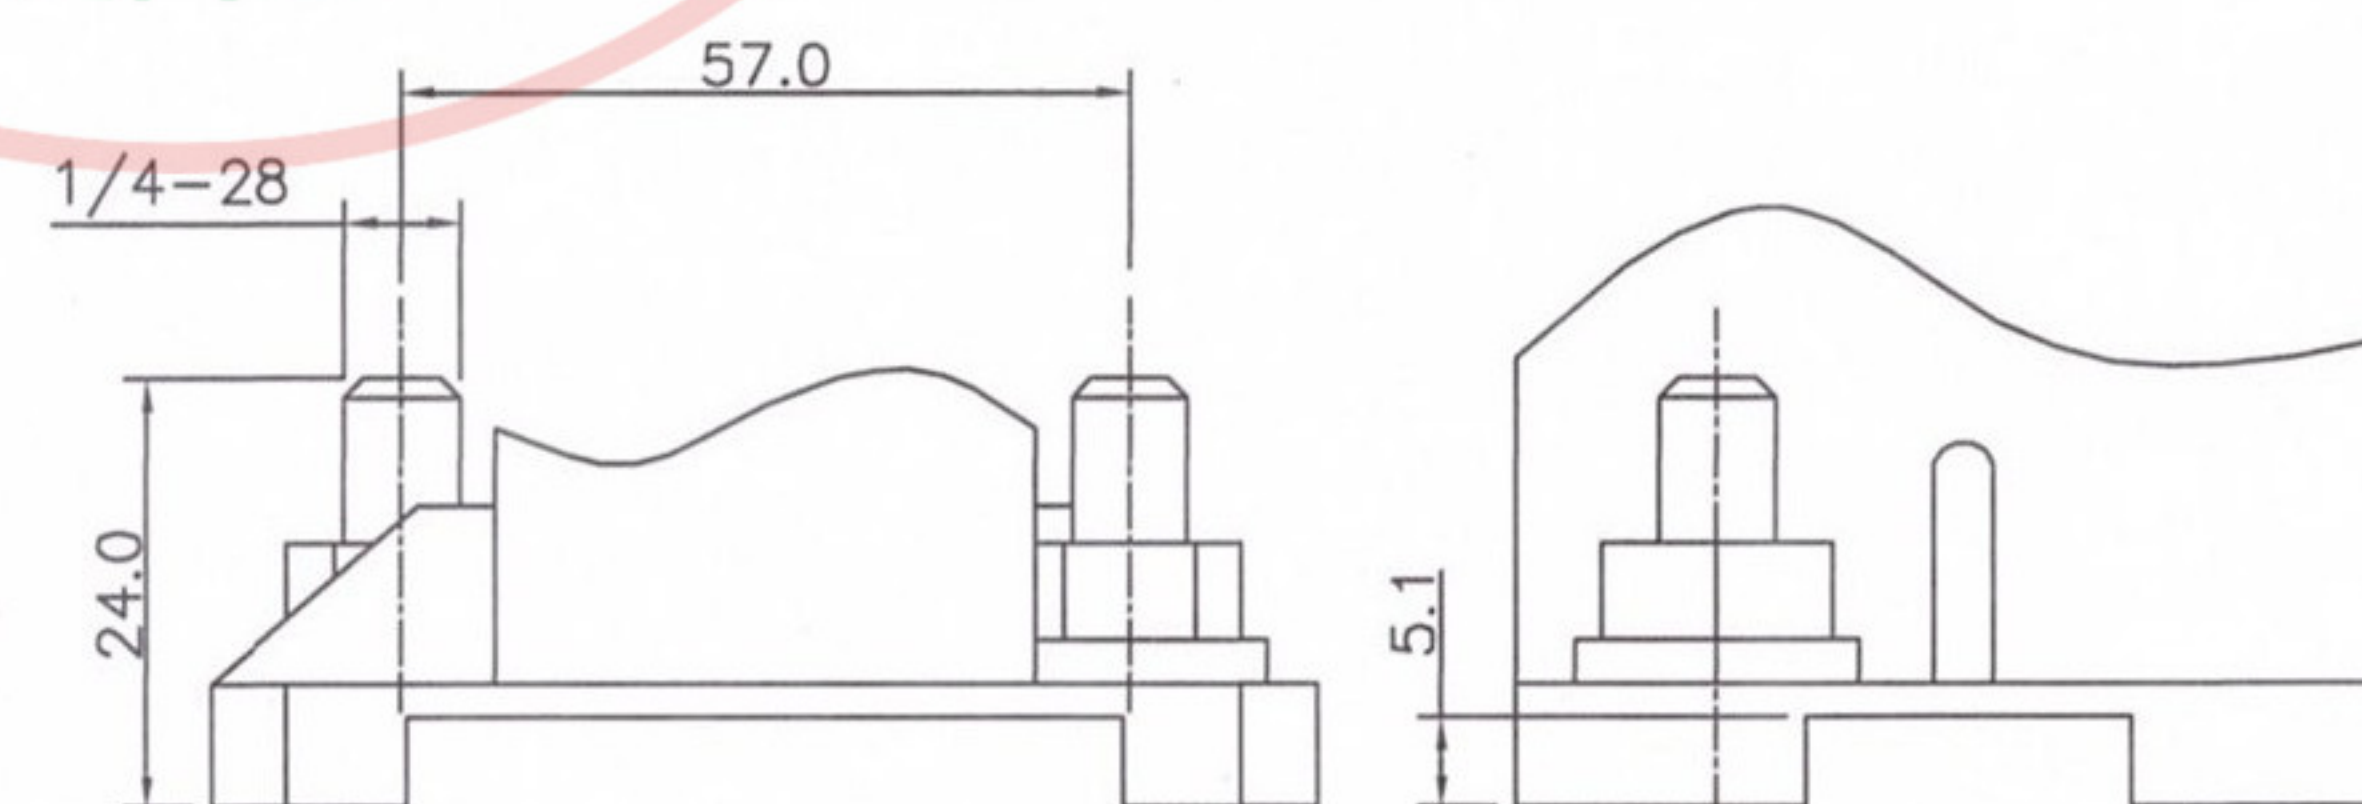

Surface mount terminal
(E97、E98、E99)

NOTE:

1 Ta/bbA/ccV,a=1,2,3 bb=30~200A cc=32/48