

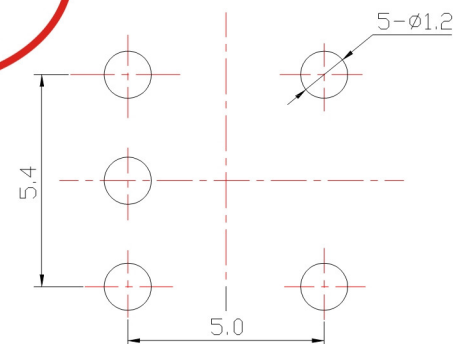
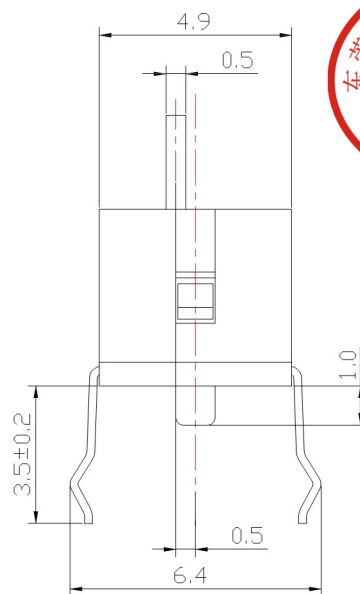




SPECIFICATION

1. RATING : DC12V, 0.1A ;
2. CONTACT RESISTANCE : $\leq 100\text{m}\Omega$;
3. INSULATION RESISTANCE : $\geq 100\text{M}\Omega$;
4. OPERATING TEMPERATURE : $-25^{\circ}\text{C} \sim +80^{\circ}\text{C}$;
5. HUMIDITY APPLICATION : $< 85\%$ RH ;
6. OPERATING FORCE : $40 \pm 15\text{gf}$;
7. LIFE : 50,000 CYCLES ;

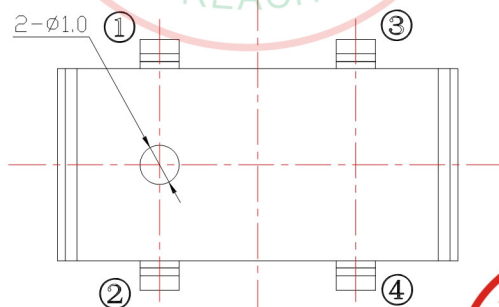

SCHEMATIC



⑤	Terminal	4	BRASS	Ag Plating
④	Base	1	NYLON	Black
③	Contact	1	PHOSPHOR BRONZE	Ag Plating
②	Cover	1	POM	Black
①	Button	1	POM	Black
ITEM	PART NAME	QTY	MATERIAL	FINISHING

				 东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd	DRAWN BY: Jack Lu		DATE: 03/19/20		MAT'L		TITLE	SWITCH				
					CHECKED BY: Jacky Chen		DATE: 03/19/20			FINISH		MODLE	DETECTOR SWITCH			
					TOLERANCE UNLESS OTHERWISE STATED:		Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3°	3RD. ANGEL'S			UNITS	MM	APPROVED BY: Tony Kao	DATE: 03/19/20	SCALE: 1 : 1	DWG NO. 3K-01C-S379
														SHEET NO. 1 of 1	PART NO. 3K-01C-S379	VER: R
ITEM NO.	DESCRIPTION			DRAWN	DATE											
	A		B			C	D	E	F	G	H	I	J			