

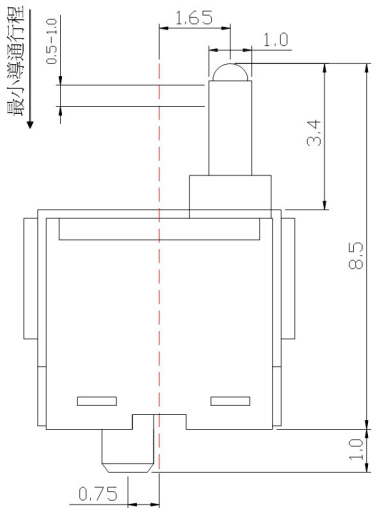


P.C.B LAYOUT

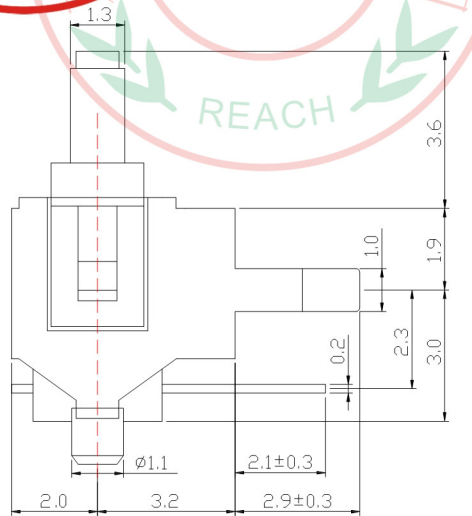

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	45 ±15gf
Life	50,000 cycles

NO.	PARTS	MATERIALS	QTY	FINISH
F	STAND	SPCC	1	Tin PLATED
E	THERMINAL	PHOSPHOR BRONZE	2	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	NYLON	1	BLACK
B	CASE	NYLON	1	BLACK
A	KNOB	NYLON	1	BLACK / WHITE

ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市朗纶电子制品有限公司
Dongguan langlun electronic products Co., Ltd

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 - 15 ±0.3
 Above 15 - 30 ±0.4
 Above 30 - 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SIZE
Jack Lu	09/08/15		SWITCH	A4
CHECKED BY:	DATE	FINISH	MODLE	VER
Jacky Chen	09/08/15		DETECTOR SWITCH	R
APPROVED BY:	DATE	SCALE	DWG NO.	SHEET NO.
Tony Kao	09/08/15	1 : 1	3K-A20B-S246	1 of 1
			PART NO.	
			3K-A20B-S246	