






DIMENSIONS

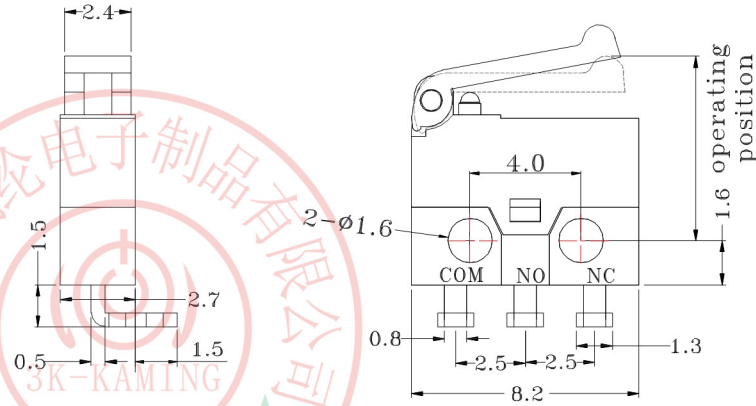

CIRCUIT

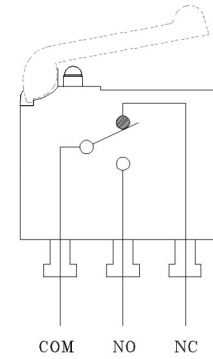

P.C.B LAYOUT MOUNTING PATTERN

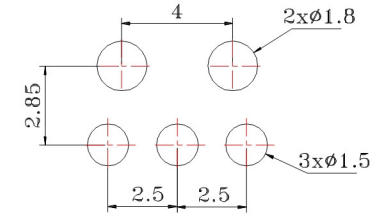

Specifications

Specifications			Material		
1	Rating	30 VDC / 500mA	1	Terminal	Brass , Silver Plated
2	Operating Force	50 gf Max	2	Body	PBT
3	Life	300,000 cycles Min	3	Cover	POM
4	Operating Position	6.7mm ± 0.5mm	4	Level	POM
5	Contact Resistance	100 m ohms Max(Initial)	5	Pin	POM
6	Insulation Resistance	100 M ohms Min(at 250VDC)	6	Contact	Phosphor Bronze , Silver Plated
	Dielectric withstanding voltage	500VAC 1 minute			
	Operating temperature	-25°C ~ +70°C			
9	Ambient humidity	35% ~ 85% RH			
10	Maifunction durability	10 to 55 Hz 1.5mm double amplitude during 2 hours			



东莞市朗纶电子制品有限公司
Dongguan langlun electronic products Co., Ltd

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/16/15
DATE: 12/16/15
DATE: 12/16/15

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
MICRO SWITCH
3K-SSM-001R
3K-SSM-001R

SIZE: A4
VER: R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新Life	Jack	121615