

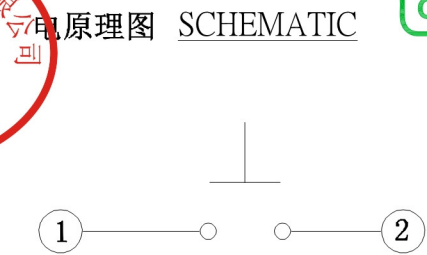
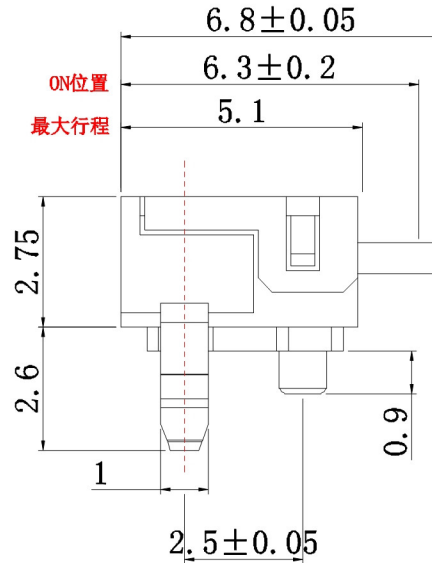



外型图 OUTLINE DRAWING

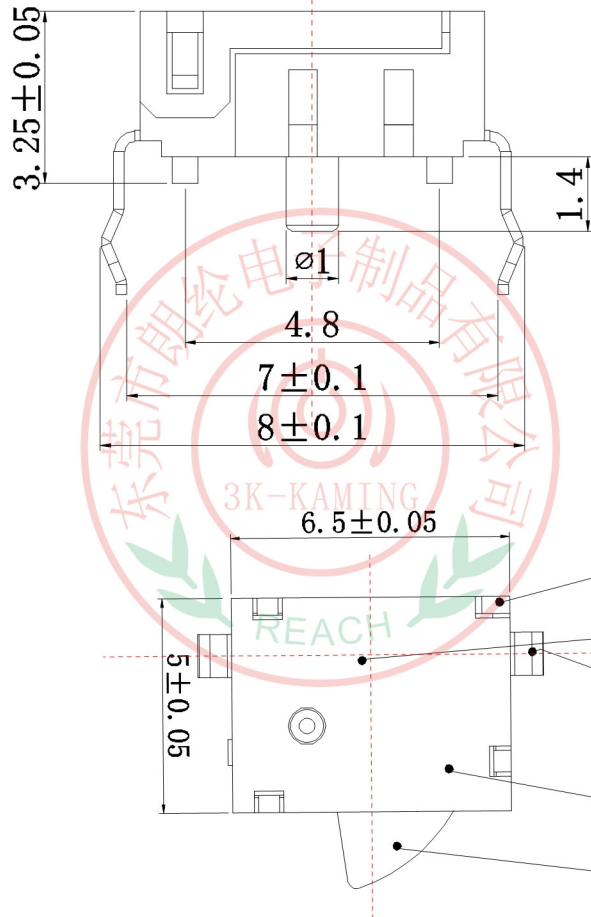

安装尺寸 P.C.B LAYOUT MOUNTING

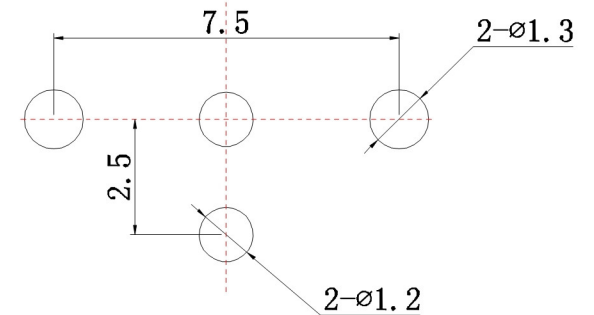

主要技术指标参数 Specifications		品名 Model number		组成元件 Material	
温度范围 Temperature:	-40--70℃	TITLE	DRAWN BY: DATE	1	按钮 Button 1 POM(白)
额定负荷 Rated Load:	DC 16V 0.1A	SWITCH	Frank Wu 04/17/12	2	弹压 Contact 1 BeCu QBe2-Y2-0.08 D. Ag7
接触电阻 Contact Resistance:	≤0.5Ω	MODLE	CHECKED BY: DATE	3	焊脚 Terminal 1 Brass, Silver Plated H62-0.2 D. Ag7
绝缘电阻 Insulation Resistance:	≥100mΩ	DETECTOR SWITCH	Jacky Chen 04/17/12	4	盖子 Cover 1 POM
耐压 Withstand Voltage:	AC100V/min	DWG NO.	APPROVED BY: DATE	5	底座 Body 1 PA66
动作力 Operation Force:	0.3--0.6N	3K-V-06A	Tony Kao 04/17/12	 <b>东莞市朗纶电子制品有限公司</b> Dongguan langlun electronic products Co., Ltd	
回流焊 Reflow soldering:	250℃	PART NO.			
寿命 Life:	>50000次	3K-V-06A			