

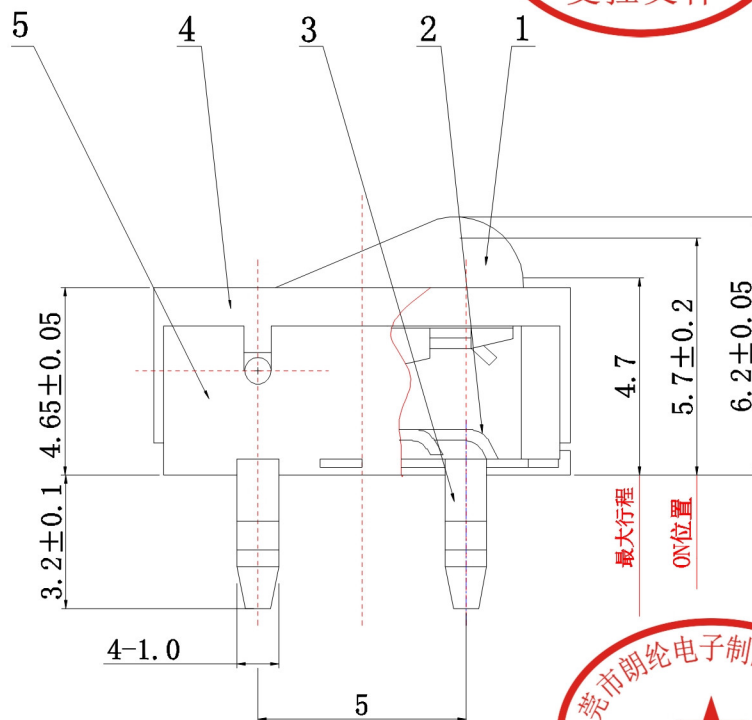



外型图 OUTLINE DRAWING

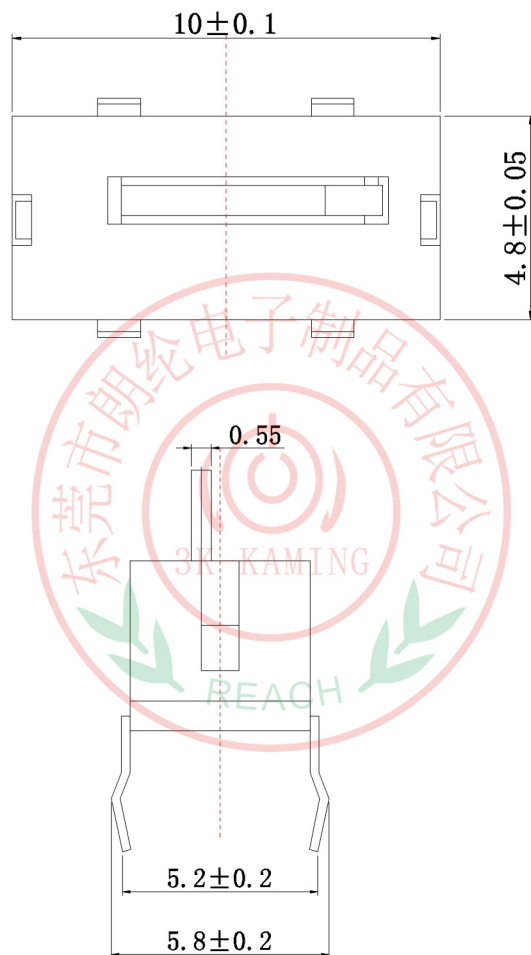


电原理图 SCHEMATIC



安装尺寸 P.C.B LAYOUT MOUNTING

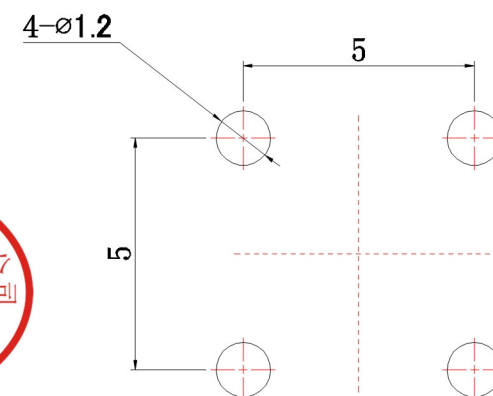

主要技术指标参数 Specifications		品名 Model number		1	按 钮 Button	1	POM(白)	组成元件 Material	
温度范围 Temperature:	-40--70℃	TITLE	DRAWN BY: DATE	2	弹 压 Contect	1	BeCu QBe2-Y2-0.08		D. Ag7
额定负荷 Rated Load:	DC 16V 0.1A	SWITCH	Frank Wu 04/17/12	3	焊 脚 Terminal	1	Brass , Silver Plated H62-0.2		D. Ag7
接触电阻 Contact Resisance:	≤0.5Ω	MODLE	CHECKED BY: DATE	4	盖 子 Cover	1	POM		
绝缘电阻 Insulation Resisance:	≥100mΩ	DETECTOR SWITCH	Jacky Chen 04/17/12	5	基 座 Body	1	PA66		
耐 压 Withstand Voltage:	AC100V/min	DWG NO.	APPROVED BY: DATE	<div><div>东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd</div></div>					
动作力 Operation Force:	0.3--0.6N	3K-V-08C	Tony Kao 04/17/12						
回流焊 Reflow soldering:	250℃	PART NO.							
寿 命 Life:	>50000次	3K-V-08C							