

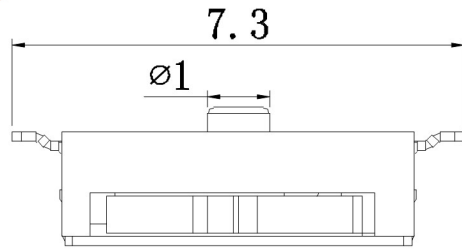
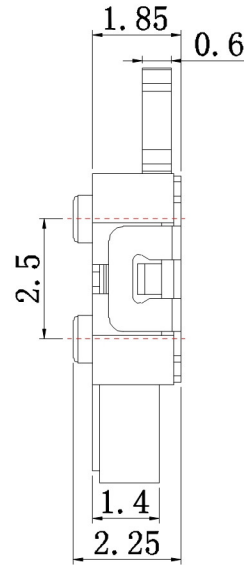



外型图 OUTLINE DRAWING

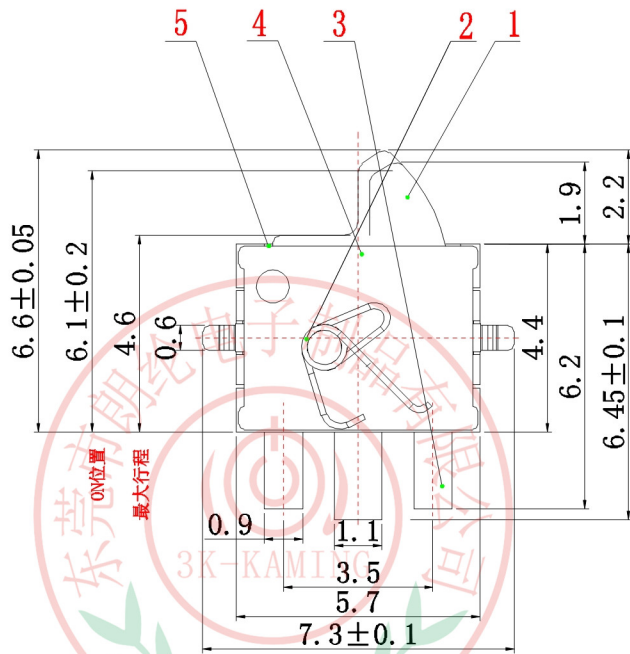

电原理图 SCHEMATIC



安装尺寸 P.C.B LAYOUT MOUNTING

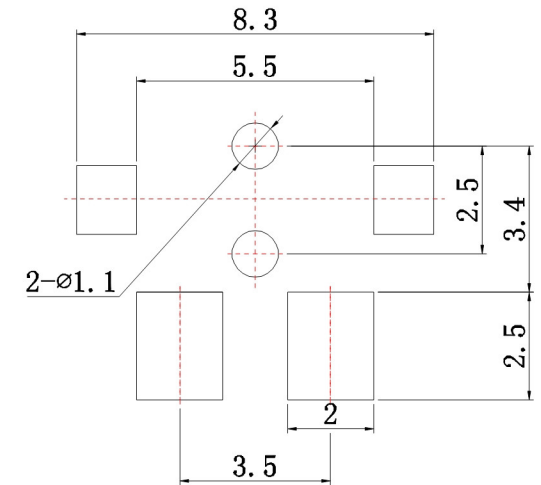

主要技术指标参数 Specifications

品名 Model number

温度范围 Temperature:	-40--70℃	TITLE	DRAWN BY: DATE
额定负荷 Rated Load:	DC 16V 0.1A	SWITCH	Frank Wu 04/17/12
接触电阻 Contact Resistance:	≤0.5Ω	MODLE	CHECKED BY: DATE
绝缘电阻 Insulation Resistance:	≥100mΩ	DETECTOR SWITCH	Jacky Chen 04/17/12
耐压 Withstand Voltage:	AC100V/min	DWG NO.	APPROVED BY: DATE
动作力 Operation Force:	0.3--0.6N	3K-W-02A	Tony Kao 04/17/12
回流焊 Reflow soldering:	250℃	PART NO.	
寿命 Life:	>50000次	3K-W-02A	

1	按钮 Button	1	LCP (灰色)	
2	弹压 Contact	1	BeCu QBe2-Y2-0.08	D. Ag7
3	焊脚 Terminal	1	Brass, Silver Plated H62-0.2	D. Ag7
4	盖子 Cover	1	Cold rolled steel	
5	底座 Body	1	LCP (灰色)	

组成元件
Material



东莞市朗纶电子制品有限公司
Dongguan langlun electronic products Co., Ltd