



外型图 OUTLINE DRAWING



电原理图 SCHEMATIC

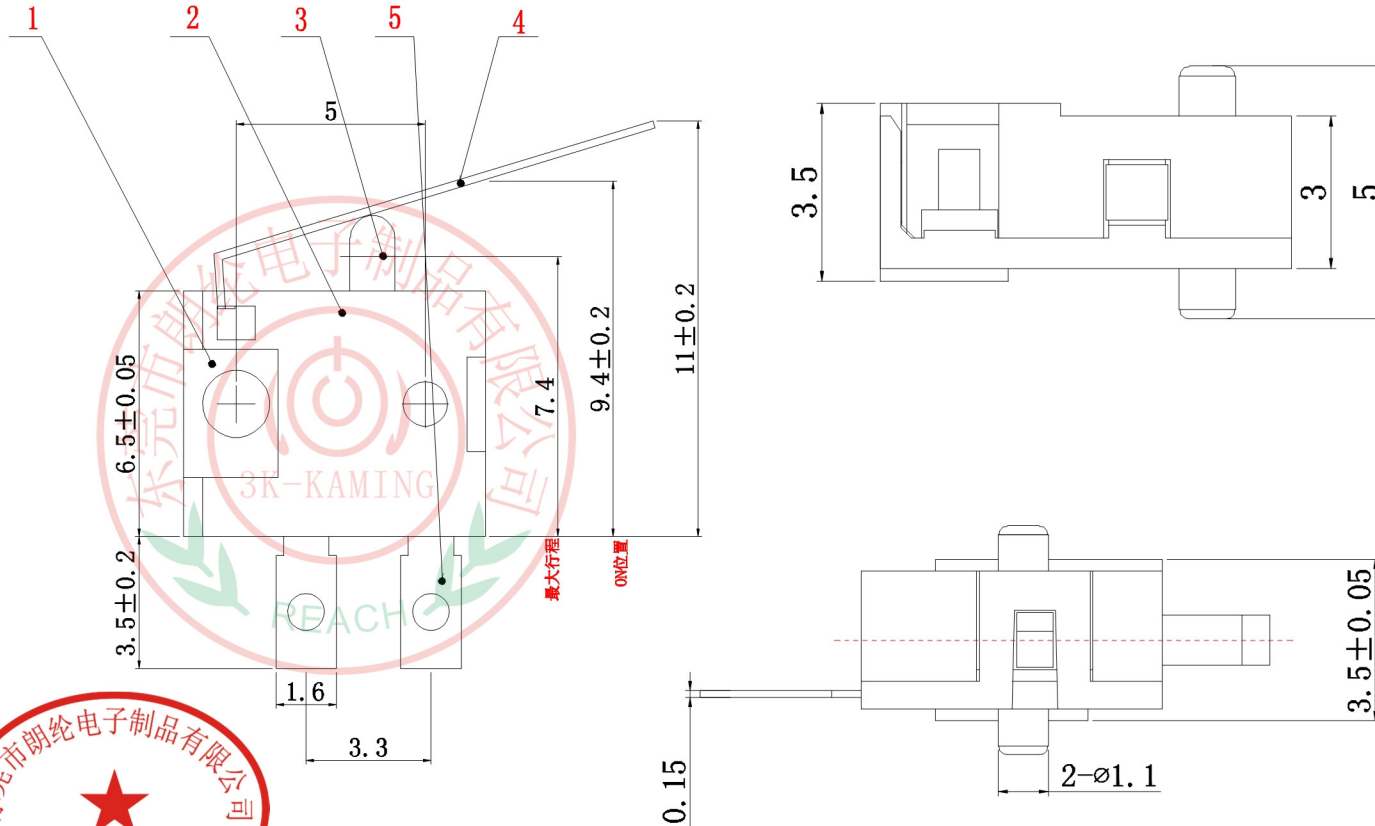

| 主要技术指标参数 Specifications | | 品名 Model number | | 组成元件 Material | | | | | |
|-----------------------------|-------------|-----------------|---------------------|---------------|-------------|---|-------------------------------------|--|--|
| 温度范围 Temperature: | -40--70℃ | TITLE | DRAWN BY: DATE | 1 | 按钮 Button | 1 | POM | | |
| 额定负荷 Rated Load: | DC 16V 0.1A | SWITCH | Frank Wu 04/17/12 | 2 | 弹压 Contact | 1 | BeCu QBe2-Y2-0.08 D. Ag7 | | |
| 接触电阻 Contact Resistance: | ≤0.5Ω | MODLE | CHECKED BY: DATE | 3 | 焊脚 Terminal | 1 | Brass, Silver Plated H62-0.2 D. Ag7 | | |
| 绝缘电阻 Insulation Resistance: | ≥100mΩ | DETECTOR SWITCH | Jacky Chen 04/17/12 | 4 | 盖子 Cover | 1 | Cold rolled steel | | |
| 耐压 Withstand Voltage: | AC100V/min | DWG NO. | APPROVED BY: DATE | 5 | 底座 Body | 1 | PA66 | | |
| 动作力 Operation Force: | 0.3--0.6N | 3K-W-07B | Tony Kao 04/17/12 | | | | | | |
| 回流焊 Reflow soldering: | 250℃ | PART NO. | | | | | | | |
| 寿命 Life: | >50000次 | 3K-W-07B | | | | | | | |