



PCB LAYOUT

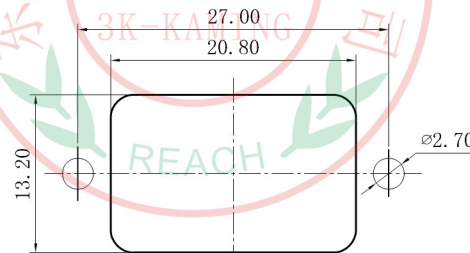

PANEL CUT-OUT

Rating :
 5A 250V AC T105 UL cUL
 2.5A 250V AC VDE 3C KC
 Insert And Extract Force: 1.36kgf~6.8kgf
 Terminal Strength: ≥80N
 Operating Life: ≥5000 cycles
 Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min
 terminals to Base:3750V AC (50-60Hz)1min
 Leakage Current : 1mA
 Insulation Resistance: ≥100MΩ 500V DC

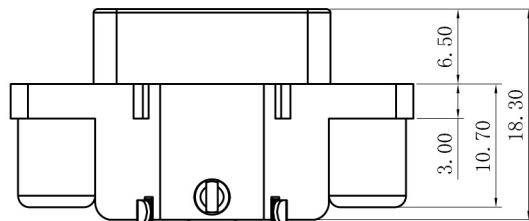

A4				普通公差	 东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd								
A3				COMMON TOLERANCE :		单位	mm	投影		品名	Ac Inlet C8型	比例	Free
A2				UP TO 5		±0.20	UNIT	核校		PRODUCT NAME		SCALE	
A1				ABOVE 5 TO 30		±0.30	DATE	核准		MODEL NO.	3K-8-7AP20		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	DATE	核准		DWG NO.	87AP20			