


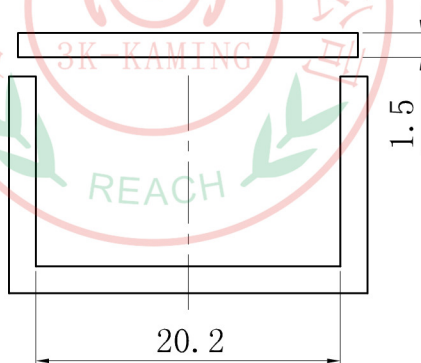
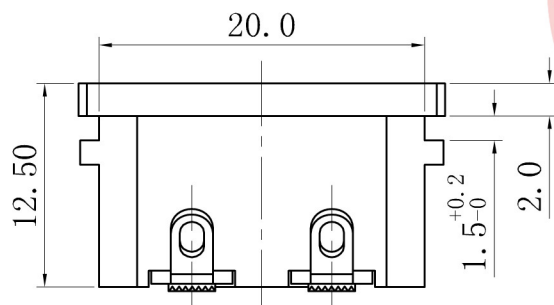


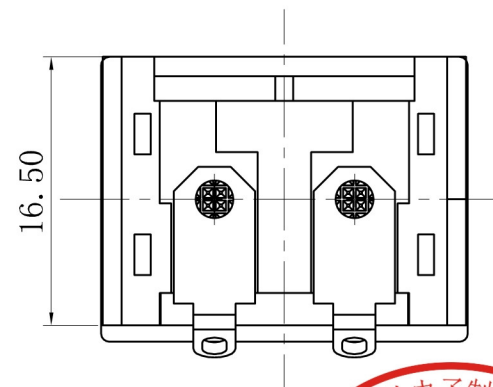

PANEL CUT-OUT

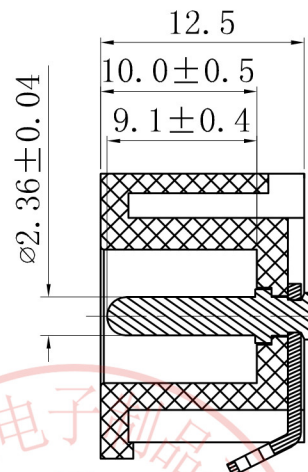

Rating :
 5A 250V AC T105 UL cUL
 2.5A 250V AC VDE 3C KC
 Insert And Extract Force: 1.36kgf~6.8kgf
 Terminal Strength: ≥80N
 Operating Life: ≥5000 cycles
 Withstand Voltage: between all terminals: 2500VAC (50-60Hz) 1min
 terminals to Base: 3750V AC (50-60Hz) 1min
 Leakage Current : 1mA
 Insulation Resistance: ≥100MΩ 500V DC

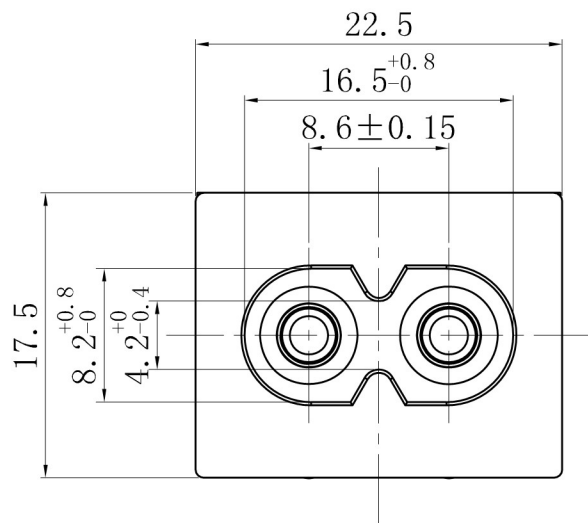

A4				普通公差	 3K-KAMING	东莞市朗纶电子制品有限公司				
A3				COMMON TOLERANCE :		Dongguan langlun electronic products Co., Ltd				
A2				UP TO 5	±0.20	单位	mm	投影		品名
A1				ABOVE 5 TO 30	±0.30	UNIT		核对应		Ac Inlet C8型
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期		核准		比例
						绘图		核对		Free
						DRAWN BY		CHECKED BY		型号
						日期		核准		图号
						DATE		核准		817VS2B
										DWG NO.