




RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |

DIMENSIONS

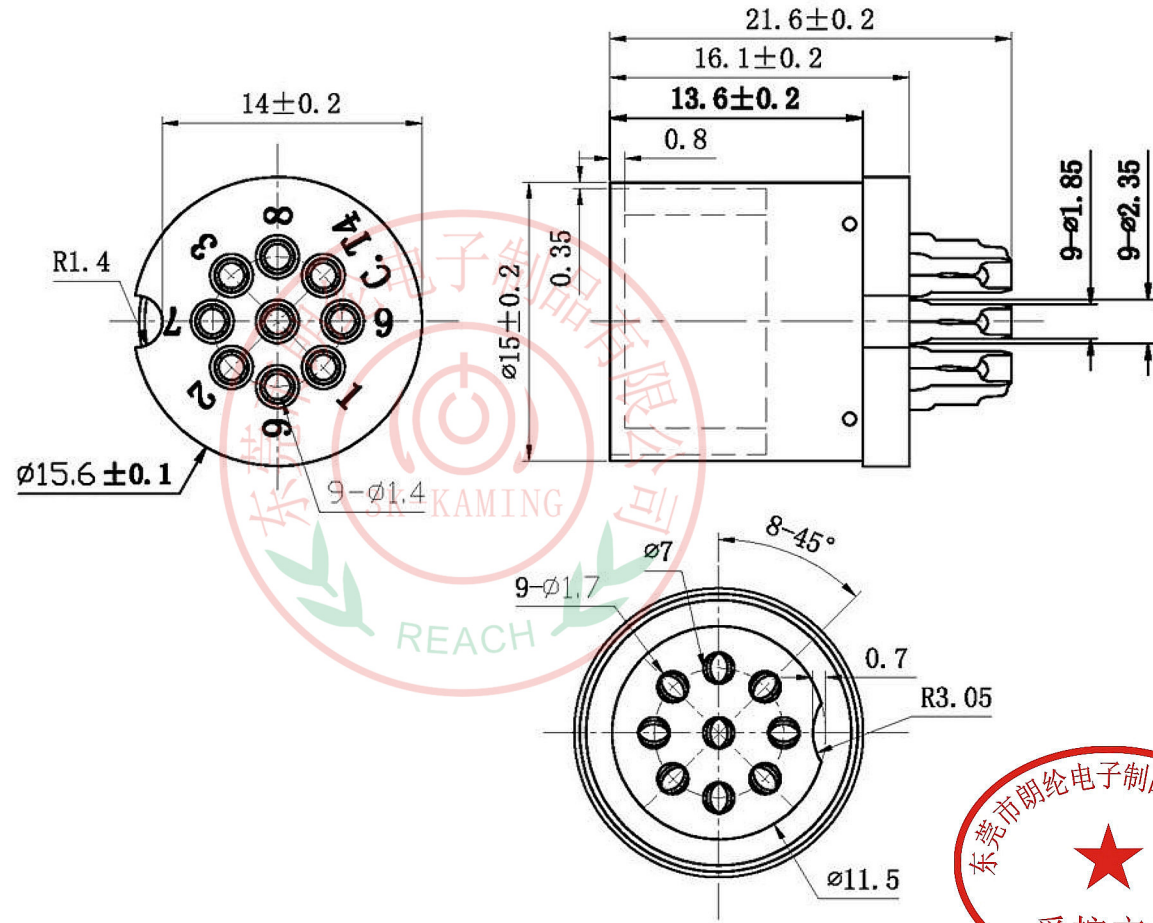

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | | |
|----|----------------------------------|------------------------------|
| 1 | 额定负荷 Rated load | 100V 2A AC |
| 2 | 接触电阻 Contact resistance | $\leq 30m \Omega$ |
| 3 | 绝缘电阻 Insulation resistance | $\geq 100M\Omega$ |
| 4 | 耐压 Withstand Voltage | AC 250V (50HZ) /1min |
| 5 | 电器寿命 Life | ≥ 5000 cycle |
| 6 | 动作力度 Strength of action | 5-50N You can customize it |
| 7 | 环境温度 The environment temperature | $-15 \sim 75^\circ C$ |
| 8 | 相对湿度 Relative humidity | $\leq 95\%$ ($40^\circ C$) |
| 9 | | |
| 10 | | |
| 11 | | |



| NO | 配件 Accessories | 材料名称 Material | 产地 Place of origin | 备注 Note | WITHIN 1.5mm: $\pm 0.1mm$ | UNITS mm | 东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd | |
|----|-----------------------------|---------------|--------------------------|-----------------|---|----------|--|---|
| 1 | 上盖/基座 Topcover/base | PBT | 进口/国产 Imports / domestic | 黑/白 Black/white | OVER 1.5mm: $\pm 0.2mm$ | MAT'L | | |
| 2 | 塑胶内件 interior | PBT | 进口/国产 Imports / domestic | 黑/白 Black/white | | SEE NOTE | | |
| 3 | 端子/拉伸件 Terminals/stretchers | H62黄铜 Brass | 进口/国产 Imports / domestic | CU/NI/SN | | FINISH | | |
| 4 | 短针 Short needle | H62黄铜 Brass | 进口/国产 Imports / domestic | CU/NI/SN | <small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING(LANG LUN) INC.</small> | SEE NOTE | | |
| 5 | 中针 Middle Needle | H62黄铜 Brass | 进口/国产 Imports / domestic | CU/NI/SN | | Q'TY | | |
| 6 | 长针 Long needle | H62黄铜 Brass | 进口/国产 Imports / domestic | CU/NI/SN | | | | |
| | | | | | | | <small>DR: Ricky 2015/03/23</small> <small>CHKD: Ricky 2015/03/23</small> <small>APPD:</small> | PART NO.: 3K-9-07MA DWG NO.: 3K-9-07MA |
| | | | | | | | <small>SCALE: 4:1</small> | <small>SHEET: 1/1</small> <small>REV: A</small> <small>CUSTOMER DRAWING</small> |