





RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |

DIMENSIONS

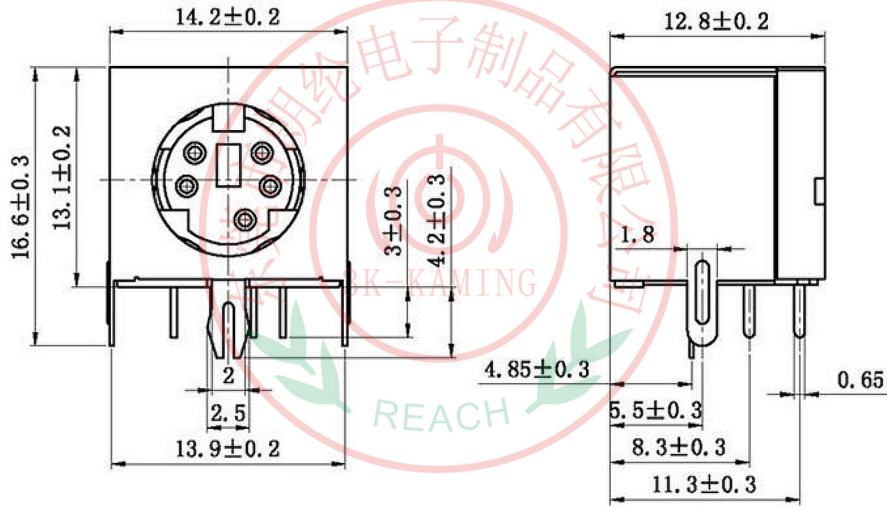

PCB板安装孔图

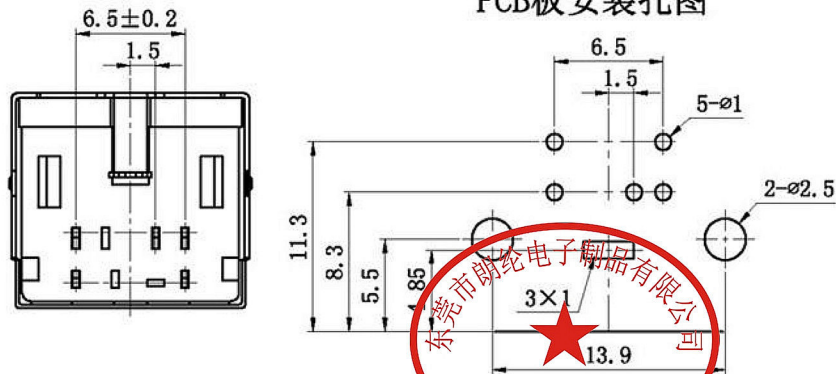

受控文件



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | | |
|----|---------------------------------|----------------------------|
| 1 | 额定负荷Rated load | 100V 2A AC |
| 2 | 接触电阻Contact resistance | ≤30m Ω |
| 3 | 绝缘电阻Insulation resistance | ≥100MΩ |
| 4 | 耐压Withstand Voltage | AC 250V (50HZ) /1min |
| 5 | 电器寿命Life | ≥5000 cycle |
| 6 | 动作力度Strength of action | 5-50N You can customize it |
| 7 | 环境温度The environment temperature | -15~75℃ |
| 8 | 相对湿度Relative humidity | ≤95 % (40℃) |
| 9 | | |
| 10 | | |
| 11 | | |

| NO | 配件Accessories | 材料名称Material | 产地Place of origin | 备注Note | WITHIN 1.5mm: ±0.1mm | UNITS mm | 东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd |
|----|----------------------------|--------------|-------------------------|----------------|----------------------|----------|--|
| 1 | 上盖/底座Topcover/base | PBT | 进口/国产Imports / domestic | 黑/白Black/white | OVER 1.5mm: ±0.2mm | MAT'L | |
| 2 | 塑胶内件interior | PBT | 进口/国产Imports / domestic | 黑/白Black/white | | SEE NOTE | |
| 3 | 端子/拉伸件Terminals/stretchers | H62黄铜Brass | 进口/国产Imports / domestic | CU/Ni/SN | | FINISH | |
| 4 | 短针Short needle | H62黄铜Brass | 进口/国产Imports / domestic | CU/Ni/SN | | SEE NOTE | |
| 5 | 中针 Middle Needle | H62黄铜Brass | 进口/国产Imports / domestic | CU/Ni/SN | | Q'TY | |
| 6 | 长针Long needle | H62黄铜Brass | 进口/国产Imports / domestic | CU/Ni/SN | | | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING(LANG LUN) INC.



东莞市朗纶电子制品有限公司
Dongguan langlun electronic products Co., Ltd

TITLE:
PUSH SWITCH / VERTICAL
DR: Ricky 2015/03/23
CHKD: Ricky 2015/03/23
APPD:

PART NO.:
3K-5-03A
DWG NO.:
3K-5-03A
SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING