





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

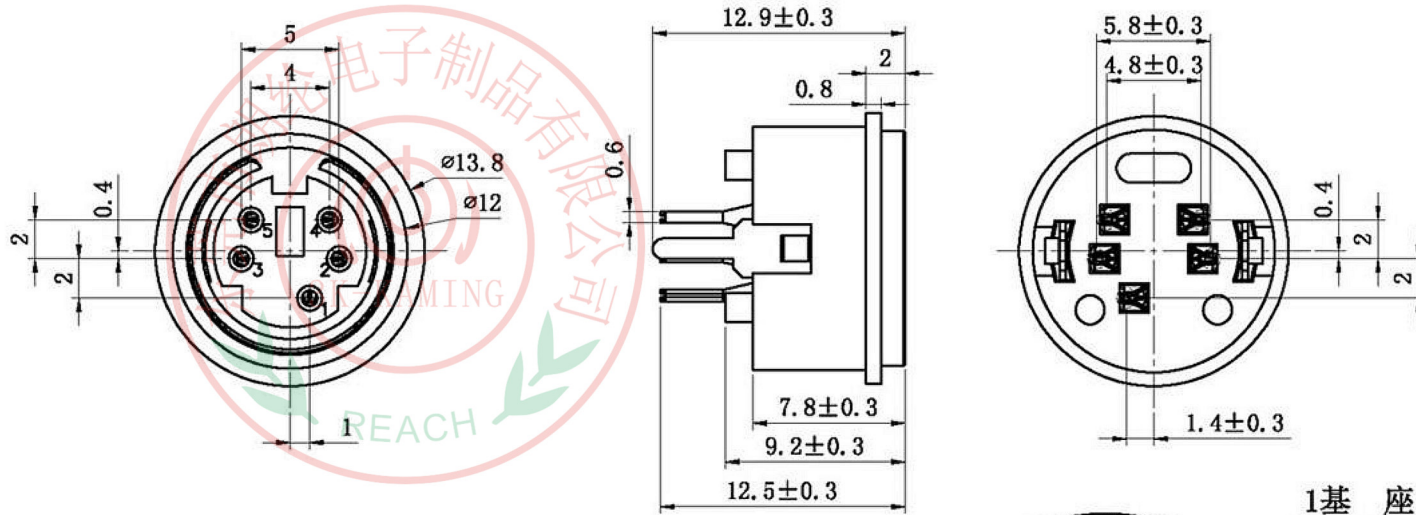

PCB板安装孔图

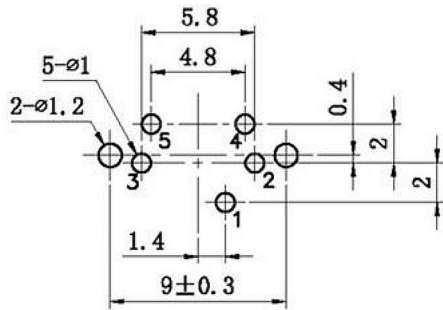

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

1	额定负荷Rated laod	12V 0.5A DC
2	接触电阻Contact resistance	$\leq 30m \Omega$
3	绝缘电阻Insulation resistance	$\geq 100M\Omega$
4	耐压 Witstand Voltage	AC 250V (50HZ) /1min
5	电器寿命Life	≥ 5000 cycle
6	动作力度Strength of action	5-50N You can customize it
7	环境温度The environment temperature	-15~75°C
8	相对湿度Relative humidity	$\leq 95\%$ (40°C)
9		
10		
11		

NO	配件Accessories	材料名称Material	产地Place of origin	备注Note	WITHIN 1.5mm: $\pm 0.1mm$	OVER 1.5mm: $\pm 0.2mm$
1	上盖/基座 Topcover/base	PBT	进口/国产 Imports / domestic	黑/白 Black/white		
2	塑胶内件 interior	PBT	进口/国产 Imports / domestic	黑/白 Black/white		
3	端子/拉伸件 Terminals/stretchers	H62黄铜 Brass	进口/国产 Imports / domestic	CU/Ni/SN		
4	短针 Short needle	H62黄铜 Brass	进口/国产 Imports / domestic	CU/Ni/SN		
5	中针 Middle Needle	H62黄铜 Brass	进口/国产 Imports / domestic	CU/Ni/SN		
6	长针 Long needle	H62黄铜 Brass	进口/国产 Imports / domestic	CU/Ni/SN		

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

3K-KAMING

东莞市朗纶电子制品有限公司
Dongguan langlun electronic products Co., Ltd

TITLE: PUSH SWITCH / VERTICAL

PART NO.: 3K-5-04A

DR: Ricky 2015/03/23

DWG NO.: 3K-5-04A

CHKD: Ricky 2015/03/23

APPD:

SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING(LANG LUN) INC.