





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

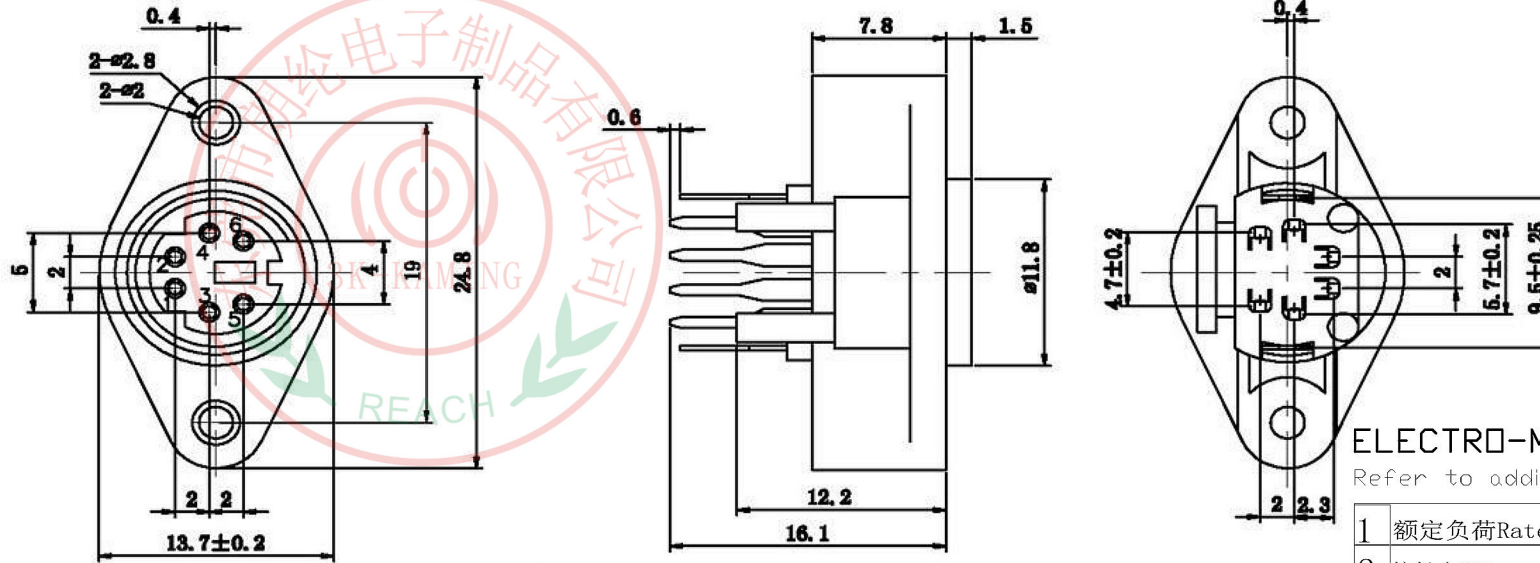

PCB板安装孔图



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

1	额定负荷Rated load	12V 0.5A DC
2	接触电阻Contact resistance	$\leq 30m \Omega$
3	绝缘电阻Insulation resistance	$\geq 100M\Omega$
4	耐压Withstand Voltage	AC 250V (50HZ) /1min
5	电器寿命Life	≥ 5000 cycle
6	动作力度Strength of action	5-50N You can customize it
7	环境温度The environment temperature	$-15 \sim 75^{\circ}C$
8	相对湿度Relative humidity	$\leq 95\%$ ($40^{\circ}C$)
9	-	-
10	-	-
11	-	-



NO	配件Accessories	材料名称Material	产地Place of origin	备注Note	WITHIN 1.5mm: $\pm 0.1mm$
1	上盖/基座Topcover/base	PBT	进口/国产Imports / domestic	黑/白Black/white	OVER 1.5mm: $\pm 0.2mm$
2	塑胶内件interior	PBT	进口/国产Imports / domestic	黑/白Black/white	
3	端子/拉伸件Terminals/stretchers	H62黄铜Brass	进口/国产Imports / domestic	CU/Ni/SN	
4	短针Short needle	H62黄铜Brass	进口/国产Imports / domestic	CU/Ni/SN	
5	中针 Middle Needle	H62黄铜Brass	进口/国产Imports / domestic	CU/Ni/SN	
6	长针Long needle	H62黄铜Brass	进口/国产Imports / domestic	CU/Ni/SN	

UNITS	mm	东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd				
MAT'L	SEE NOTE		TITLE:	PART NO.:		
FINISH	SEE NOTE		DR:	<i>Ricky</i> 2015/03/23	3K-6-09AA	
Q'TY	SEE NOTE		CHKD:	<i>Ricky</i> 2015/03/23	DWG NO.:	
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING(LANG LUN) INC.</small>		APPD:	SCALE	SHEET	REV.	CUSTOMER
			4:1	1/1	A	DRAWING