






RoHS  
Compliant  
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |
|      |      |     |       |

## DIMENSIONS

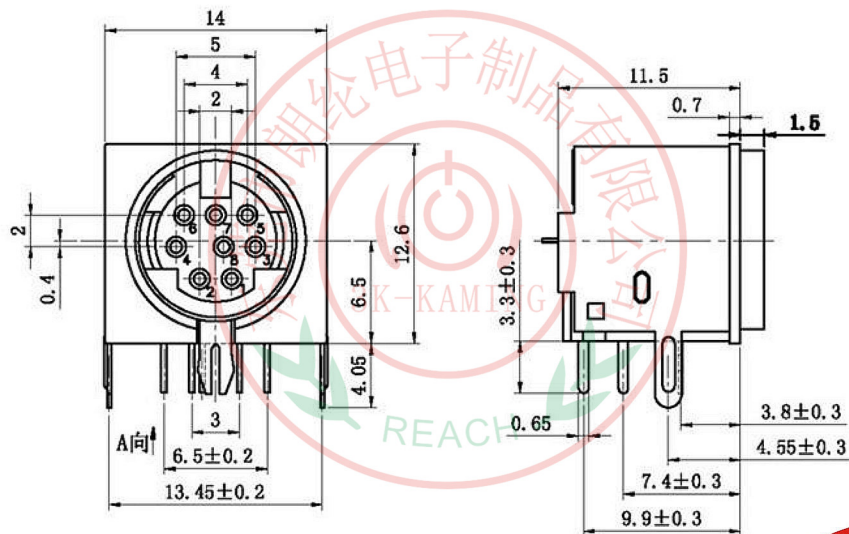

PCB板安装孔图

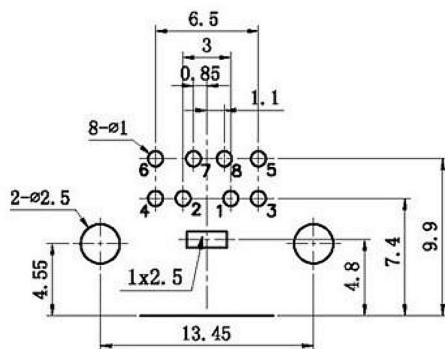

## ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

|    |                                 |                            |
|----|---------------------------------|----------------------------|
| 1  | 额定负荷Rated laod                  | 12V 2A DC                  |
| 2  | 接触电阻Contact resistance          | ≤30m Ω                     |
| 3  | 绝缘电阻Insulation resistance       | ≥100MΩ                     |
| 4  | 耐压Witstand Voltage              | AC 250V(50HZ) /1min        |
| 5  | 电器寿命Life                        | ≥5000 cycle                |
| 6  | 动作力度Strength of action          | 5-50N You can customize it |
| 7  | 环境温度The environment temperature | -15~75℃                    |
| 8  | 相对湿度Relative humidity           | ≤95 % (40℃)                |
| 9  |                                 |                            |
| 10 |                                 |                            |
| 11 |                                 |                            |

| NO                                                                                                                                                                                                                       | 配件Accessories              | 材料名称Material | 产地Place of origin       | 备注Note         | WITHIN 1.5mm: ±0.1mm | UNIT mm  | 东莞市朗纶电子制品有限公司<br>Dongguan langlun electronic products Co., Ltd |  |                     |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------|-------------------------|----------------|----------------------|----------|----------------------------------------------------------------|--|---------------------|--|
| 1                                                                                                                                                                                                                        | 上盖/基座Topcover/base         | PBT          | 进口/国产Imports / domestic | 黑/白Black/white | OVER 1.5mm: ±0.2mm   | MAT'L    |                                                                |  |                     |  |
| 2                                                                                                                                                                                                                        | 塑胶内件interior               | PBT          | 进口/国产Imports / domestic | 黑/白Black/white |                      | SEE NOTE | TITLE: PUSH SWITCH / VERTICAL                                  |  | PART NO.: 3K-8-02AA |  |
| 3                                                                                                                                                                                                                        | 端子/拉伸件Terminals/stretchers | H62黄铜Brass   | 进口/国产Imports / domestic | CU/Ni/SN       |                      | FINISH   | DR: Ricky 2015/03/23                                           |  | DWG NO.: 3K-8-02AA  |  |
| 4                                                                                                                                                                                                                        | 短针Short needle             | H62黄铜Brass   | 进口/国产Imports / domestic | CU/Ni/SN       |                      | SEE NOTE | CHKD: Ricky 2015/03/23                                         |  | SCALE: 4:1          |  |
| 5                                                                                                                                                                                                                        | 中针 Middle Needle           | H62黄铜Brass   | 进口/国产Imports / domestic | CU/Ni/SN       |                      | Q'TY     | APPD:                                                          |  | SHEET: 1/1          |  |
| 6                                                                                                                                                                                                                        | 长针Long needle              | H62黄铜Brass   | 进口/国产Imports / domestic | CU/Ni/SN       |                      |          |                                                                |  | REV: A              |  |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING(LANG LUN) INC. |                            |              |                         |                |                      |          | CUSTOMER DRAWING                                               |  |                     |  |