






RoHS  
Compliant  
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |
|      |      |     |       |

## DIMENSIONS

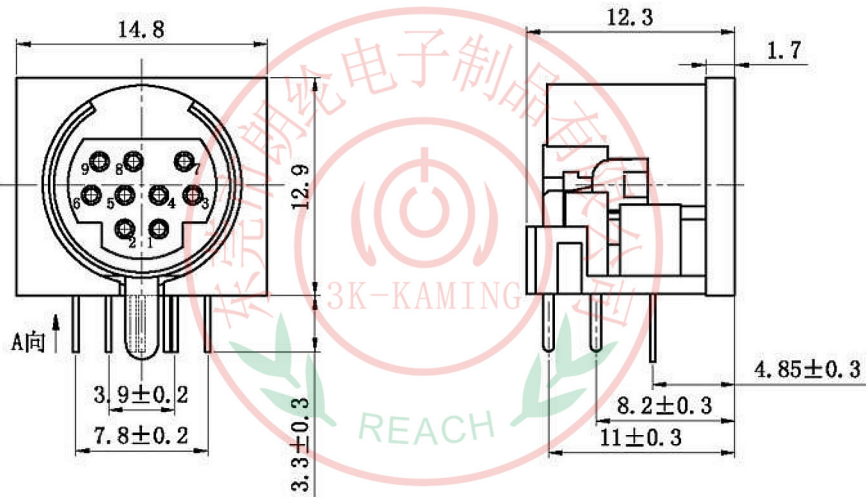

PCB板安装孔图

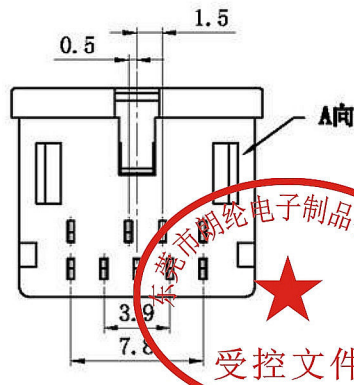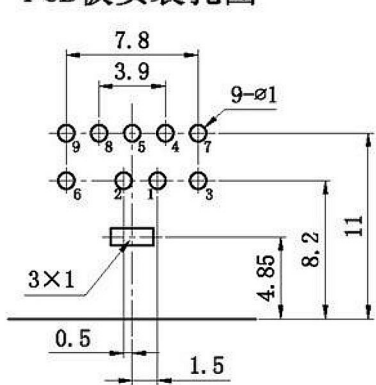

## ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

|    |                                 |                            |
|----|---------------------------------|----------------------------|
| 1  | 额定负荷Rated load                  | 12V 2A DC                  |
| 2  | 接触电阻Contact resistance          | ≤30m Ω                     |
| 3  | 绝缘电阻Insulation resistance       | ≥100MΩ                     |
| 4  | 耐压Withstand Voltage             | AC 250V (50HZ) /1min       |
| 5  | 电器寿命Life                        | ≥5000 cycle                |
| 6  | 动作力度Strength of action          | 5-50N You can customize it |
| 7  | 环境温度The environment temperature | -15~75℃                    |
| 8  | 相对湿度Relative humidity           | ≤95% (40℃)                 |
| 9  |                                 |                            |
| 10 |                                 |                            |
| 11 |                                 |                            |

| NO | 配件Accessories              | 材料名称Material | 产地Place of origin       | 备注Note         | WITHIN 1.5mm: ±0.1mm | UNITS mm | <br><b>东莞市朗纶电子制品有限公司</b><br><b>Dongguan langlun electronic products Co., Ltd</b> |
|----|----------------------------|--------------|-------------------------|----------------|----------------------|----------|--|
| 1  | 上盖/基座Topcover/base         | PBT          | 进口/国产Imports / domestic | 黑/白Black/white | OVER 1.5mm: ±0.2mm   | MAT'L    |  |
| 2  | 塑胶内件interior               | PBT          | 进口/国产Imports / domestic | 黑/白Black/white |                      | SEE NOTE |  |
| 3  | 端子/拉伸件Terminals/stretchers | H62黄铜Brass   | 进口/国产Imports / domestic | CU/Ni/SN       |                      | FINISH   |  |
| 4  | 短针Short needle             | H62黄铜Brass   | 进口/国产Imports / domestic | CU/Ni/SN       |                      | SEE NOTE |  |
| 5  | 中针 Middle Needle           | H62黄铜Brass   | 进口/国产Imports / domestic | CU/Ni/SN       |                      | Q'TY     |  |
| 6  | 长针Long needle              | H62黄铜 Brass  | 进口/国产Imports / domestic | CU/Ni/SN       |                      |          |  |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING(LANG LUN) INC.



3K-KAMING

TITLE:

PUSH SWITCH / VERTICAL

DR: Ricky 2015/03/23

CHKD: Ricky 2015/03/23

APPD:

东莞市朗纶电子制品有限公司  
Dongguan langlun electronic products Co., Ltd

PART NO.: 3K-9-01A

DWG NO.: 3K-9-01A

SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING

REV. A

CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING