

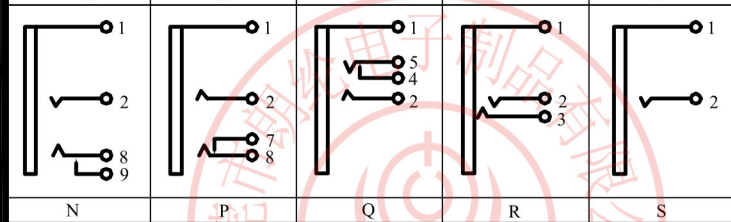



ALLOWANCE	
UNDER 3	± 0.1
3 TO 6	± 0.15
6 TO 15	± 0.2
15 TO 50	± 0.25
50 OVER	± 0.3

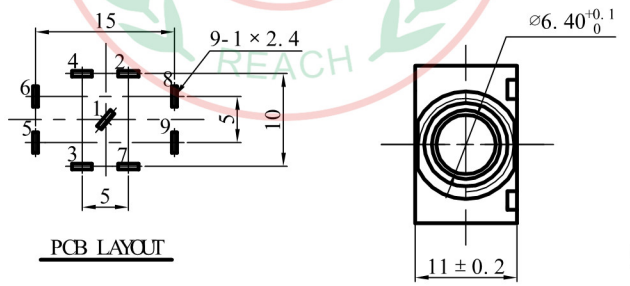

SCHMATIC

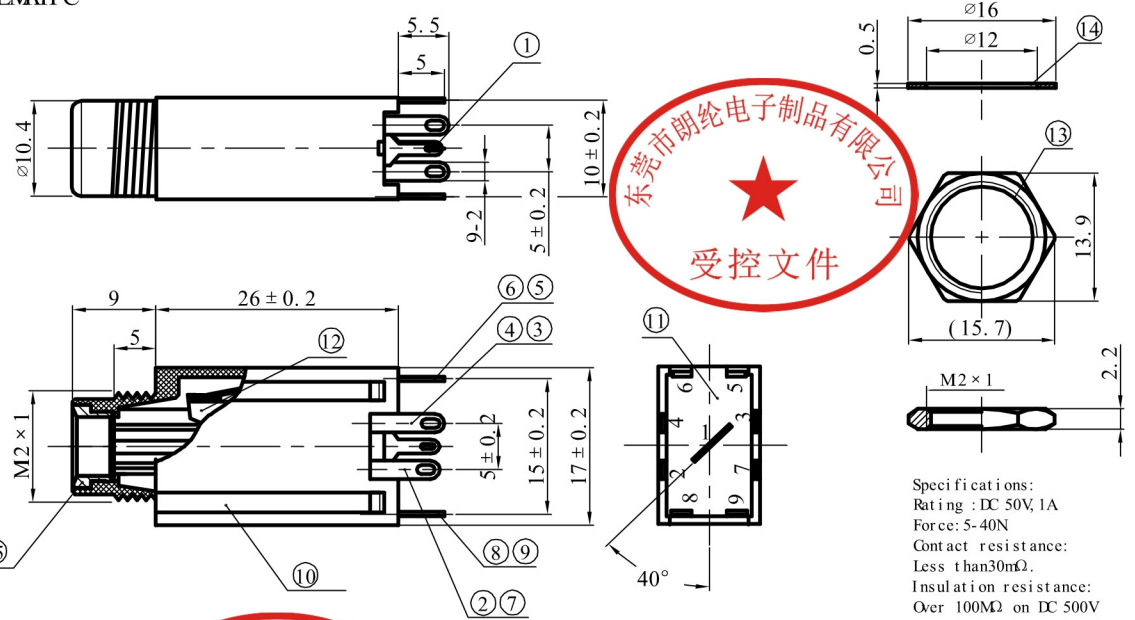

Specifications:
 Rating : DC 50V, 1A
 Force: 5-40N
 Contact resistance:
 Less than 30mΩ.
 Insulation resistance:
 Over 100MΩ on DC 500V
 measured.
 Voltage withstand :
 AC 500V, For 1 minute.

10	HOUSE	PA66	1	BLACK				
9	TERMINAL-9	BRONZE t=0.3	1	Ag PLATED	15	SOCKET	BRASS	1 N PLATED
8	TERMINAL-8	BRONZE t=0.4	1	Ag PLATED	14	WASHER	SPCC t=0.5	1 N PLATED
7	TERMINAL-7	BRASS t=0.4	1	Ag PLATED	13	SCREW	BRASS	1 N PLATED
6	TERMINAL-6	BRONZE t=0.3	1	Ag PLATED	12	SLIPPERY PIECE	PCM	2 BLACK
5	TERMINAL-5	BRONZE t=0.4	1	Ag PLATED	11	COVER	PA66	1 BLACK
4	TERMINAL-4	BRASS t=0.4	1	Ag PLATED	MODEL NO: SJ-6304-9P		ALLOWANCE:	DRAWN BY:
3	TERMINAL-3	BRONZE t=0.3	1	Ag PLATED	TYPE: 6.35 PHONE JACK		UNIT: mm	CHECKED BY:
2	TERMINAL-2	BRONZE t=0.5	1	Ag PLATED	MATERIAL NO:		SCALE:	APPROVED BY:
1	TERMINAL-1	BRONZE t=0.7	1	Ag PLATED	PROJECTION	 东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd		
NO.	PART NAME	MATERIAL	QTY	FINISHING	