





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

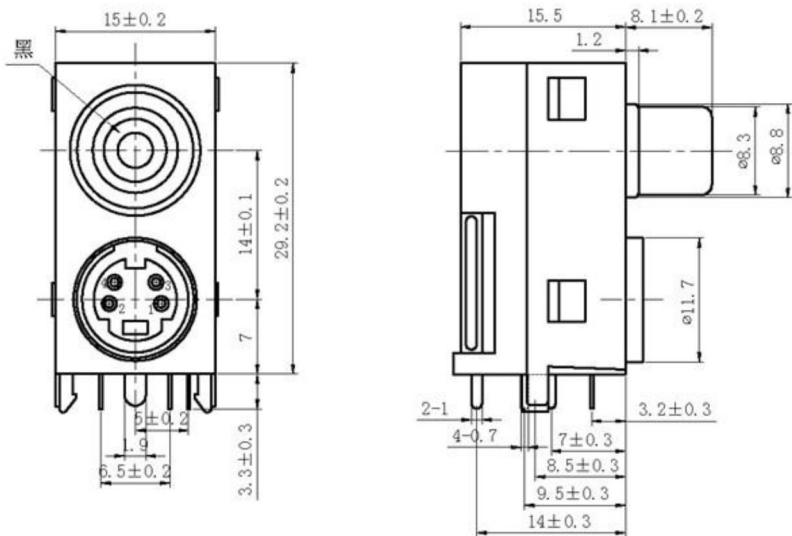

PCB板安装孔图



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

1	额定负荷Rated laod	12V 2A DC
2	接触电阻Contact resistance	≤30m Ω
3	绝缘电阻Insulation resistance	≥100MΩ
4	耐压Witstand Voltage	AC 250V(50HZ) /1min
5	电器寿命Life	≥ 5000 cycle
6	动作力度Strength of action	5-50N You can customize it
7	环境温度The environment temperature	-15~75℃
8	相对湿度Relative humidity	≤95 % (40℃)
9		
10		
11		

NO	配件Accessories	材料名称Material	产地Place of origin	备注Note	WITHIN 1.5mm: ±0.1mm	UNITS mm	 3K-KAMING	东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd					
1	上盖/基座Topcover/base	PBT	进口/国产Imports / domestic	黑/白Black/white	OVER 1.5mm: ±0.2mm	MAT'L		SEE NOTE	TITLE: PUSH SWITCH / VERTICAL		PART NO.: 3K-AV-MDC-412A		
2	塑胶内件interior	PBT	进口/国产Imports / domestic	黑/白Black/white		FINISH	SEE NOTE		DR: Ricky 2015/03/23		DWG NO.: 3K-AV-MDC-412A		
3	端子/拉伸件Terminals/stretchers	H62黄铜Brass	进口/国产Imports / domestic	CU/NI/SN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING(LANG LUN) INC.	Q'TY <th rowspan="4"></th> <th colspan="2">CHKD: Ricky 2015/03/23</th> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> <th rowspan="2">CUSTOMER DRAWING</th>			CHKD: Ricky 2015/03/23		SCALE	SHEET	REV.
4	短针Short needle	H62黄铜Brass	进口/国产Imports / domestic	CU/NI/SN		APPD:	4:1		1/1	A			
5	中针 Middle Needle	H62黄铜Brass	进口/国产Imports / domestic	CU/NI/SN									
6	长针Long needle	H62黄铜 Brass	进口/国产Imports / domestic	CU/NI/SN									