


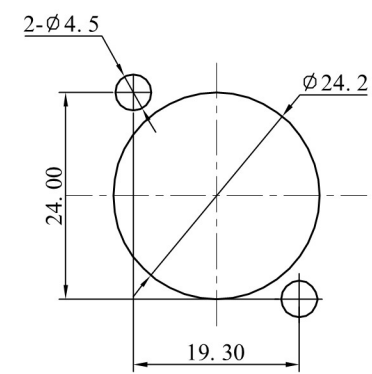
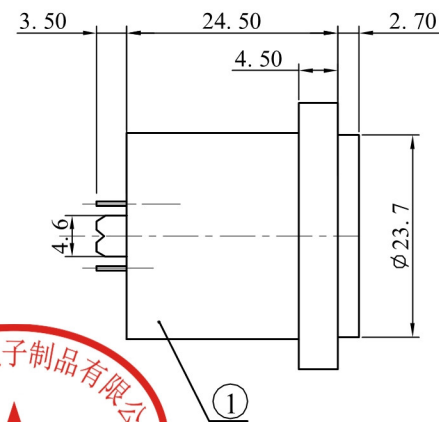
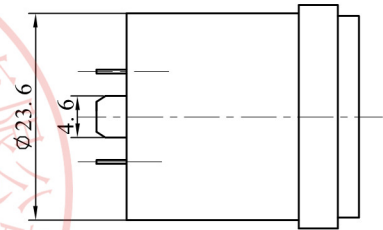


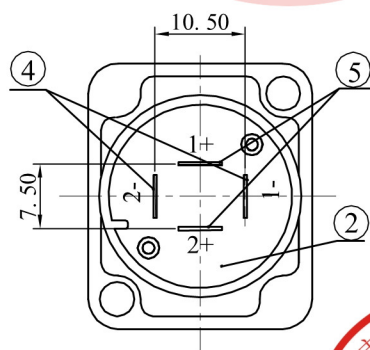

PANEL CUT OUT

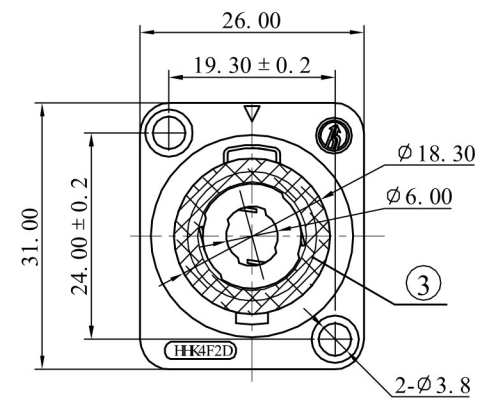

ALLOWANCE	
UNDER 3	± 0.1
3 TO 6	± 0.15
6 TO 15	± 0.2
15 TO 50	± 0.25
50 OVER	± 0.3



PCB

Specifications:
Rating :DC 250V,20A.
Force:5~40N.
Contact resistance:
Less than30m Ω .
Insulation resistance:
Over 100M Ω on DC 500V
measured.
Voltage withstand :
AC 500V,For 1 minute.

5	TERMINAL- B	BRONZE t=0.4	2	Ag PLATED
4	TERMINAL- A	BRONZE t=0.4	2	Ag PLATED
3	WASHER	RUBBER	1	BLACK
2	COVER	PA66	1	BLACK
1	HOUSE	PA66	1	BLACK
NQ	PART NAME	MATERIAL	QTY	FINISHING

MODEL NO :SPE-01B		ALLOWANCE:	DRAWN BY:
TYPE: XLR CABLE CONNECTORS		UNIT: mm	CHECKED BY:
MATERIAL NO :		SCALE:	APPROVED BY:
PROJECTION		东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd	
