



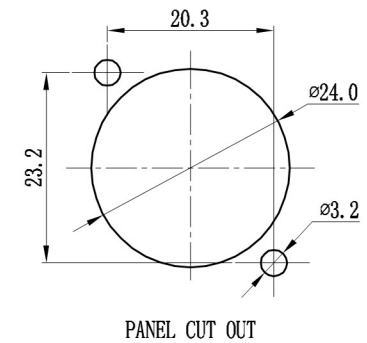


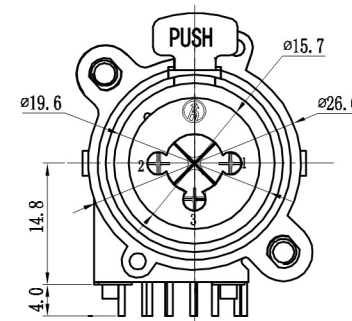

| ALLOWANCE |       |
|-----------|-------|
| UNDER 3   | ±0.1  |
| 3 TO 6    | ±0.15 |
| 6 TO 15   | ±0.2  |
| 15 TO 50  | ±0.25 |
| 50 OVER   | ±0.3  |

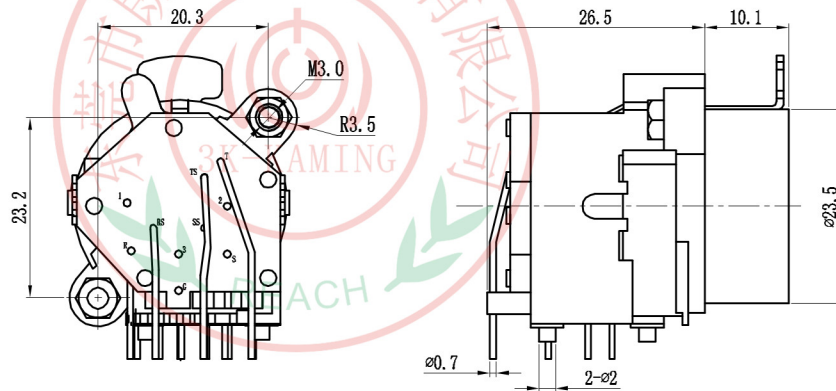


PCB LAYOUT

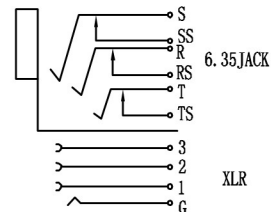

SCHEMATIC



Specifications:  
Rating :AC 50V, 3A.  
Force:5-40N.  
Contact resistance:  
Less than30mΩ.  
Insulation resistance:  
Over 1GΩ on DC 500V measured.  
Voltage withstand :  
AC 1000V, For 1 minute.

|                                                                                       |                                                                                       |                                                                |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------|
| MODEL NO: SPC-04A                                                                     | ALLOWANCE:                                                                            | DRAWN BY:                                                      |
| TYPE: SP SOCKET                                                                       | UNIT: mm                                                                              | CHECKED BY:                                                    |
| MATERIAL NO:                                                                          | SCALE:                                                                                | APPROVED BY:                                                   |
| PROJECTION                                                                            |  | 东莞市朗纶电子制品有限公司<br>Dongguan langlun electronic products Co., Ltd |
|  |                                                                                       |                                                                |