

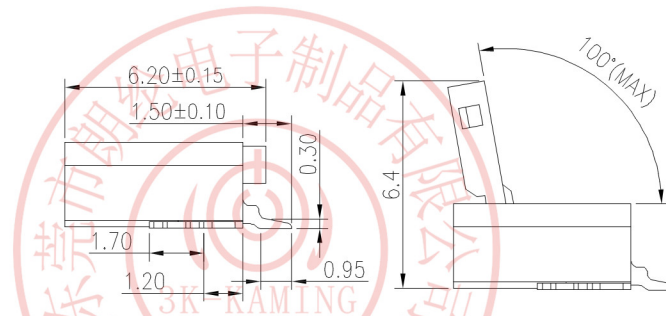




APPLICABLE FPC/FFC
(THICKNESS 0.3±0.03)

NOTES:

- 1.HUOSINGT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.ACTUATOR: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 3.TERMINAL:PHOSPHOR BRONZE
PLATING:GOLD FLASH OR MATTE-TIN OR TIN (LEAD FREE)
- 4.FITTING NAIL:BRASS
PLATING:MATTE-TIN OR TIN (LEAD FREE)

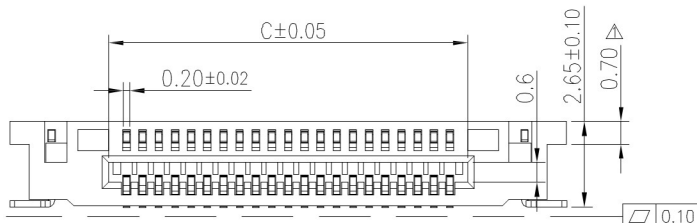

CABLE INSERT DIM.

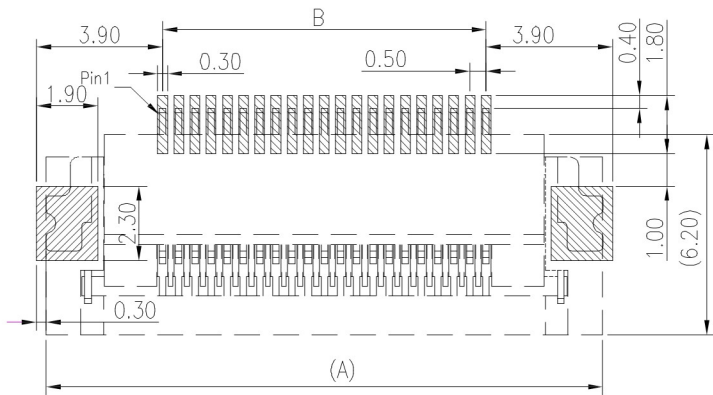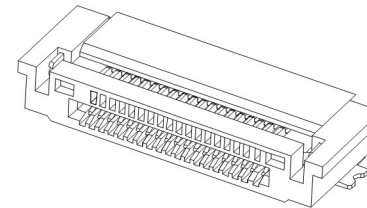

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

UNITS mm		东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd		
MAT'L		PART NO.(INTENDED USE) 05265-GX-nPWB	TITLE: 0.5前插后掀盖大锁扣 H2.65	
FINISH		APPD:	DWG NO.: 05265-GX-nPWB	
Q'TY PCS		CHKD:	DR:	SCALE SHEET REV. 1/1 1/1 A
X.± 0.3	X.°± 5°	HU 2016.09.28		
.X± 0.25	.X°± 2°			
.XX± 0.20	.XX°± 1°			
.XXX± 0.10	.XXX°± 0.5°			