



1.MATERIAL  
 HOUSING:LCP UL 94V-0  
 ACTUATOR:LCP UL 94V-0  
 CONTACTS:COPPER ALLOY  
 PEG: COPPER ALLOY

2.PLATING:  
 CONTACTS:TIN OVER NICKEL  
 PEG:TIN OVER NICKEL


3.PART NO:  
 OPERATING VOLTAGE:50V AC,DC  
 CURRENT RATING:0.3A AC,DC  
 OPERATING TEMPERATURE:-25C~+85C  
 4.PART NO:

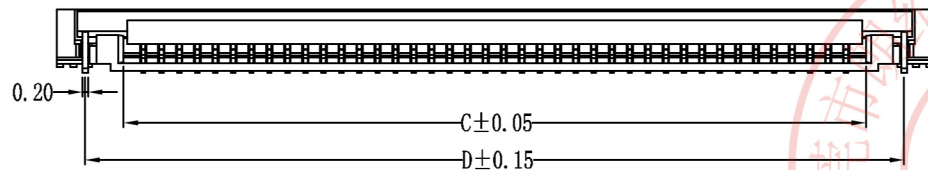



05175-xxCL-GF

GF:GOLD FLASH  
 SN:TIN OVER NICKEL

NO.OF CONTACTS:(08Pin~60Pin)

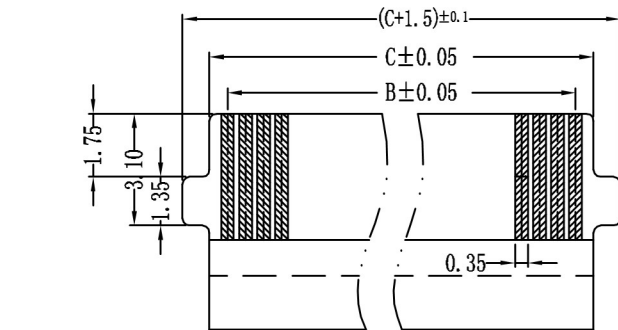


RECOMMENDED FPC DIMENSION

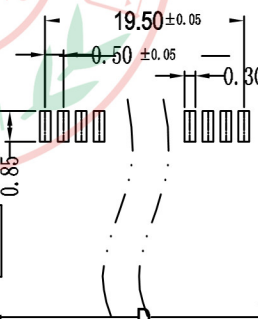

PCB LAYOUT



No. of Contacts	DIM.			
	A	B	C	D
06	7.30	2.50	3.60	5.72
08	8.30	3.50	4.60	6.72
10	9.30	4.50	5.60	7.72
12	10.30	5.50	6.60	8.72
13	10.80	6.00	7.10	9.22
18	13.30	8.50	9.60	11.72
24	16.30	11.50	12.60	14.72
28	18.30	13.50	14.60	16.72
30	19.30	14.50	15.60	17.72
32	20.30	15.50	16.60	18.72
40	24.30	19.50	20.60	22.72
50	29.30	24.50	25.60	27.72
57	32.80	28.00	29.10	28.22
60	34.30	29.50	30.60	29.72



UNITS mm

MAT'L

PART NO.(INTENDED USE)

FINISH

APPD:

Q'TY

CHKD:

DR: HU 2016.09.28

东莞市朗纶电子制品有限公司  
 Dongguan langlun electronic products Co., Ltd

TITLE:  
 0.5 PITCH 1.75H FPC CONN.

DWG NO.:

SCALE: 1/1 SHEET: 1/1 REV: A

X.± 0.3	X°± 5°	PCS
.X± 0.25	.X°± 2°	
.XX± 0.20	.XX°± 1°	
.XXX± 0.10	.XXX°± 0.5°	