

1.0mm PITCH FPC CONNECTORS

性能:

额定电流: 0.5A

额定电压: 50V

耐电压: 500V

接触电阻: $\leq 20m\Omega$




绝缘电阻: 800M Ω

工作温度: -20 $^{\circ}C \sim +85^{\circ}C$


塑件(材质): LCP, UL94V-0

锁扣(材质): LCP, UL94V-0

插簧(材质): 磷青铜, 镀锡/镀金

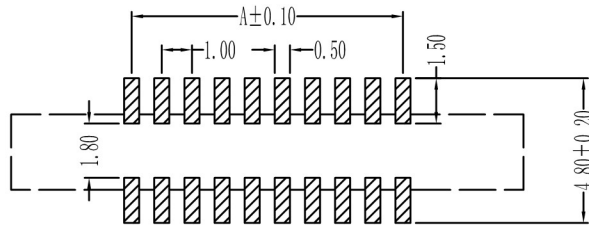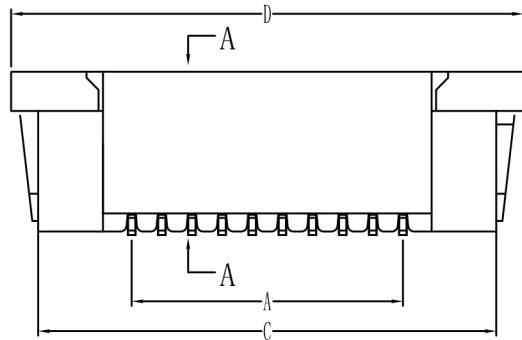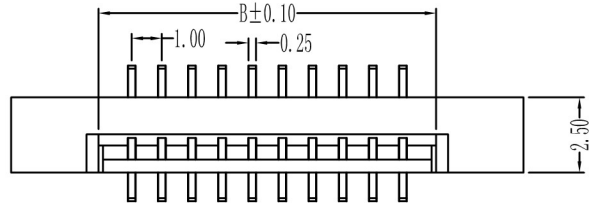

PCB Layout

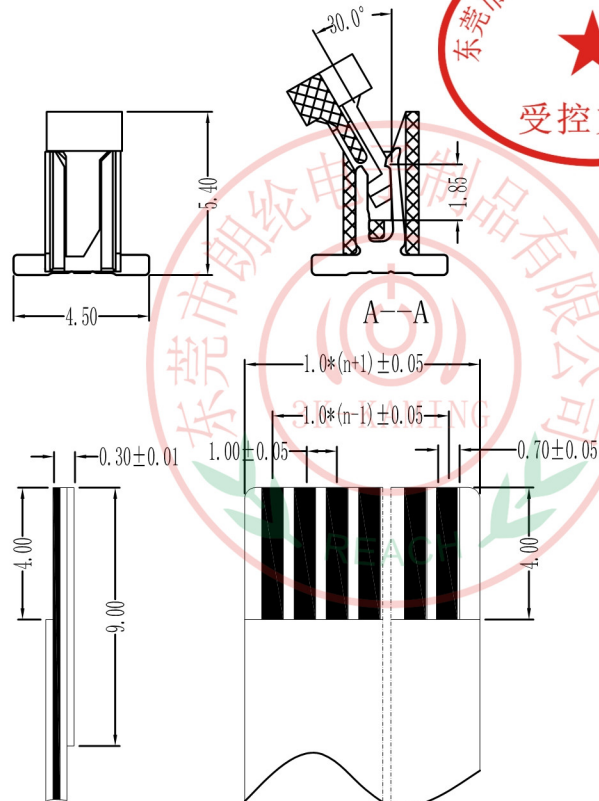

适用扁平电缆



孔位	A	B	C	D
2	1	3.15	7.2	9.1
3	2	4.15	8.2	10.1
4	3	5.15	9.2	11.1
5	4	6.15	10.2	12.1
6	5	7.15	11.2	13.1
7	6	8.15	12.2	14.1
8	7	9.15	13.2	15.1
9	8	10.15	14.2	16.1
10	9	11.15	15.2	17.1
11	10	12.15	16.2	18.1
12	11	13.15	17.2	19.1
13	12	14.15	18.2	20.1
14	13	15.15	19.2	21.1
15	14	16.15	20.2	22.1
16	15	17.15	21.2	23.1
17	16	18.15	22.2	24.1
18	17	19.15	23.2	25.1
19	18	20.15	24.2	26.1
20	19	21.15	25.2	27.1
21	20	22.15	26.2	28.1
22	21	23.15	27.2	29.1
23	22	24.15	28.2	30.1
24	23	25.15	29.2	31.1
25	24	26.15	30.2	32.1
26	25	27.15	31.2	33.1
27	26	28.15	32.2	34.1
28	27	29.15	33.2	35.1
29	28	30.15	34.2	36.1
30	29	31.15	35.2	37.1
31	30	32.15	36.2	38.1
32	31	33.15	37.2	39.1
33	32	34.15	38.2	40.1
34	33	35.15	39.2	41.1
35	34	36.15	40.2	42.1



X. ± 0.3	X $^{\circ}$ $\pm 5^{\circ}$	UNITS	mm	NAME (INTENDED USE)	东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd			
.X ± 0.25	.X $^{\circ}$ $\pm 2^{\circ}$	MAT'L		1.0mm FPC (G型) 立贴式(无焊片)	PART NO. (INTENDED USE)			
.XX ± 0.20	.XX $^{\circ}$ $\pm 1^{\circ}$	FINISH		1.0K-GT-nPB	TITLE:			
.XXX ± 0.10	.XXX $^{\circ}$ $\pm 0.5^{\circ}$	Q'TY			1.0mm FPC (G型) 立贴式(无焊片)			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING (LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING (LANG LUN) INC.				APPD:	DWG NO.:			
				CHKD:	100K17-GUB0000000			
				DR:	YLZ 2011.09.28	SCALE	SHEET	REV.
						1/1	1/1	A