
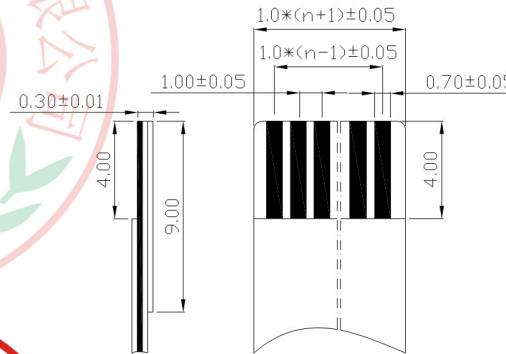
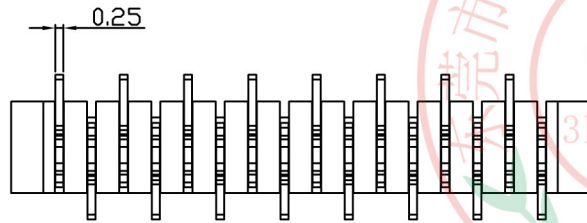




性能:
 额定电流: 0.5A
 额定电压: 50V
 耐压: 500V
 接触电阻: 30mΩ
 绝缘电阻: 800MΩ
 工作温度: -20℃ ~ +85℃

塑件(材质): LCP BLACK, UL94V-0
 插簧(材质): 磷青铜, 镀锡/镀金

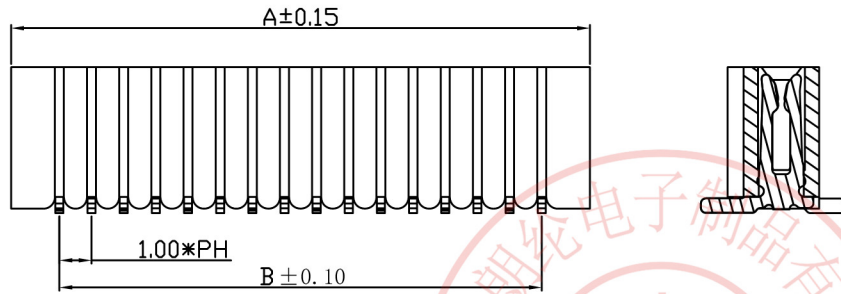

适用扁平电缆

| 孔位 | A | B | C |
|----|-------|-------|-------|
| 4 | 6.00 | 3.00 | 5.10 |
| 5 | 7.00 | 4.00 | 6.10 |
| 6 | 8.00 | 5.00 | 7.10 |
| 7 | 9.00 | 6.00 | 8.10 |
| 8 | 10.00 | 7.00 | 9.10 |
| 9 | 11.00 | 8.00 | 10.10 |
| 10 | 12.00 | 9.00 | 11.10 |
| 11 | 13.00 | 10.00 | 12.10 |
| 12 | 14.00 | 11.00 | 13.10 |
| 13 | 15.00 | 12.00 | 14.10 |
| 14 | 16.00 | 13.00 | 15.10 |
| 15 | 17.00 | 14.00 | 16.10 |
| 16 | 18.00 | 15.00 | 17.10 |
| 17 | 19.00 | 16.00 | 18.10 |
| 18 | 20.00 | 17.00 | 19.10 |
| 19 | 21.00 | 18.00 | 20.10 |
| 20 | 22.00 | 19.00 | 21.10 |
| 21 | 23.00 | 20.00 | 22.10 |
| 22 | 24.00 | 21.00 | 23.10 |
| 23 | 25.00 | 22.00 | 24.10 |
| 24 | 26.00 | 23.00 | 25.10 |
| 25 | 27.00 | 24.00 | 26.10 |
| 26 | 28.00 | 25.00 | 27.10 |
| 27 | 29.00 | 26.00 | 28.10 |
| 28 | 30.00 | 27.00 | 29.10 |
| 29 | 31.00 | 28.00 | 30.10 |
| 30 | 32.00 | 29.00 | 31.10 |
| 31 | 33.00 | 30.00 | 32.10 |
| 32 | 34.00 | 31.00 | 33.10 |
| 33 | 35.00 | 32.00 | 34.10 |
| 34 | 36.00 | 33.00 | 35.10 |
| 35 | 37.00 | 34.00 | 36.10 |

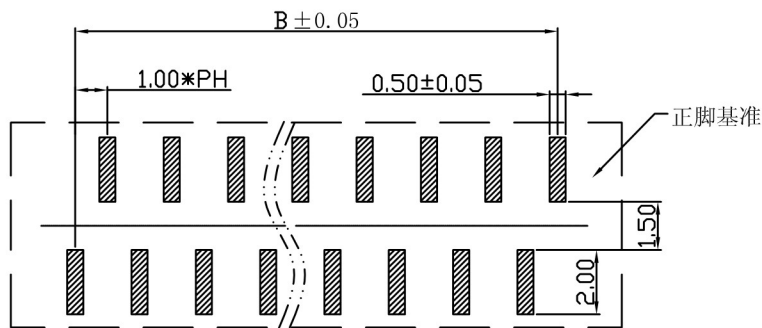

PCB LAYOUT

| | | | | | |
|--|--------------|--------|----|----------------------------|--|
| X. ± 0.3 | X° ± 5° | UNITS | mm | NAME (INTENDED USE) | 东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd |
| .X ± 0.25 | .X° ± 2° | MAT'L | | PART NO. (INTENDED USE) | |
| .XX ± 0.20 | .XX° ± 1° | FINISH | | 1.0-B-nPB | TITLE: 1.0mm FPC (双面接) 立贴正脚 |
| .XXX ± 0.10 | .XXX° ± 0.5° | Q'TY | | APPD: | DWG NO.: |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING (LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING (LANG LUN) INC. | | | | CHKD: | |
| | | | | DR: huang sheng 2013/03/29 | |
| | | | | | SCALE: 1/1 |
| | | | | | SHEET: 1/1 |
| | | | | | REV: A |