
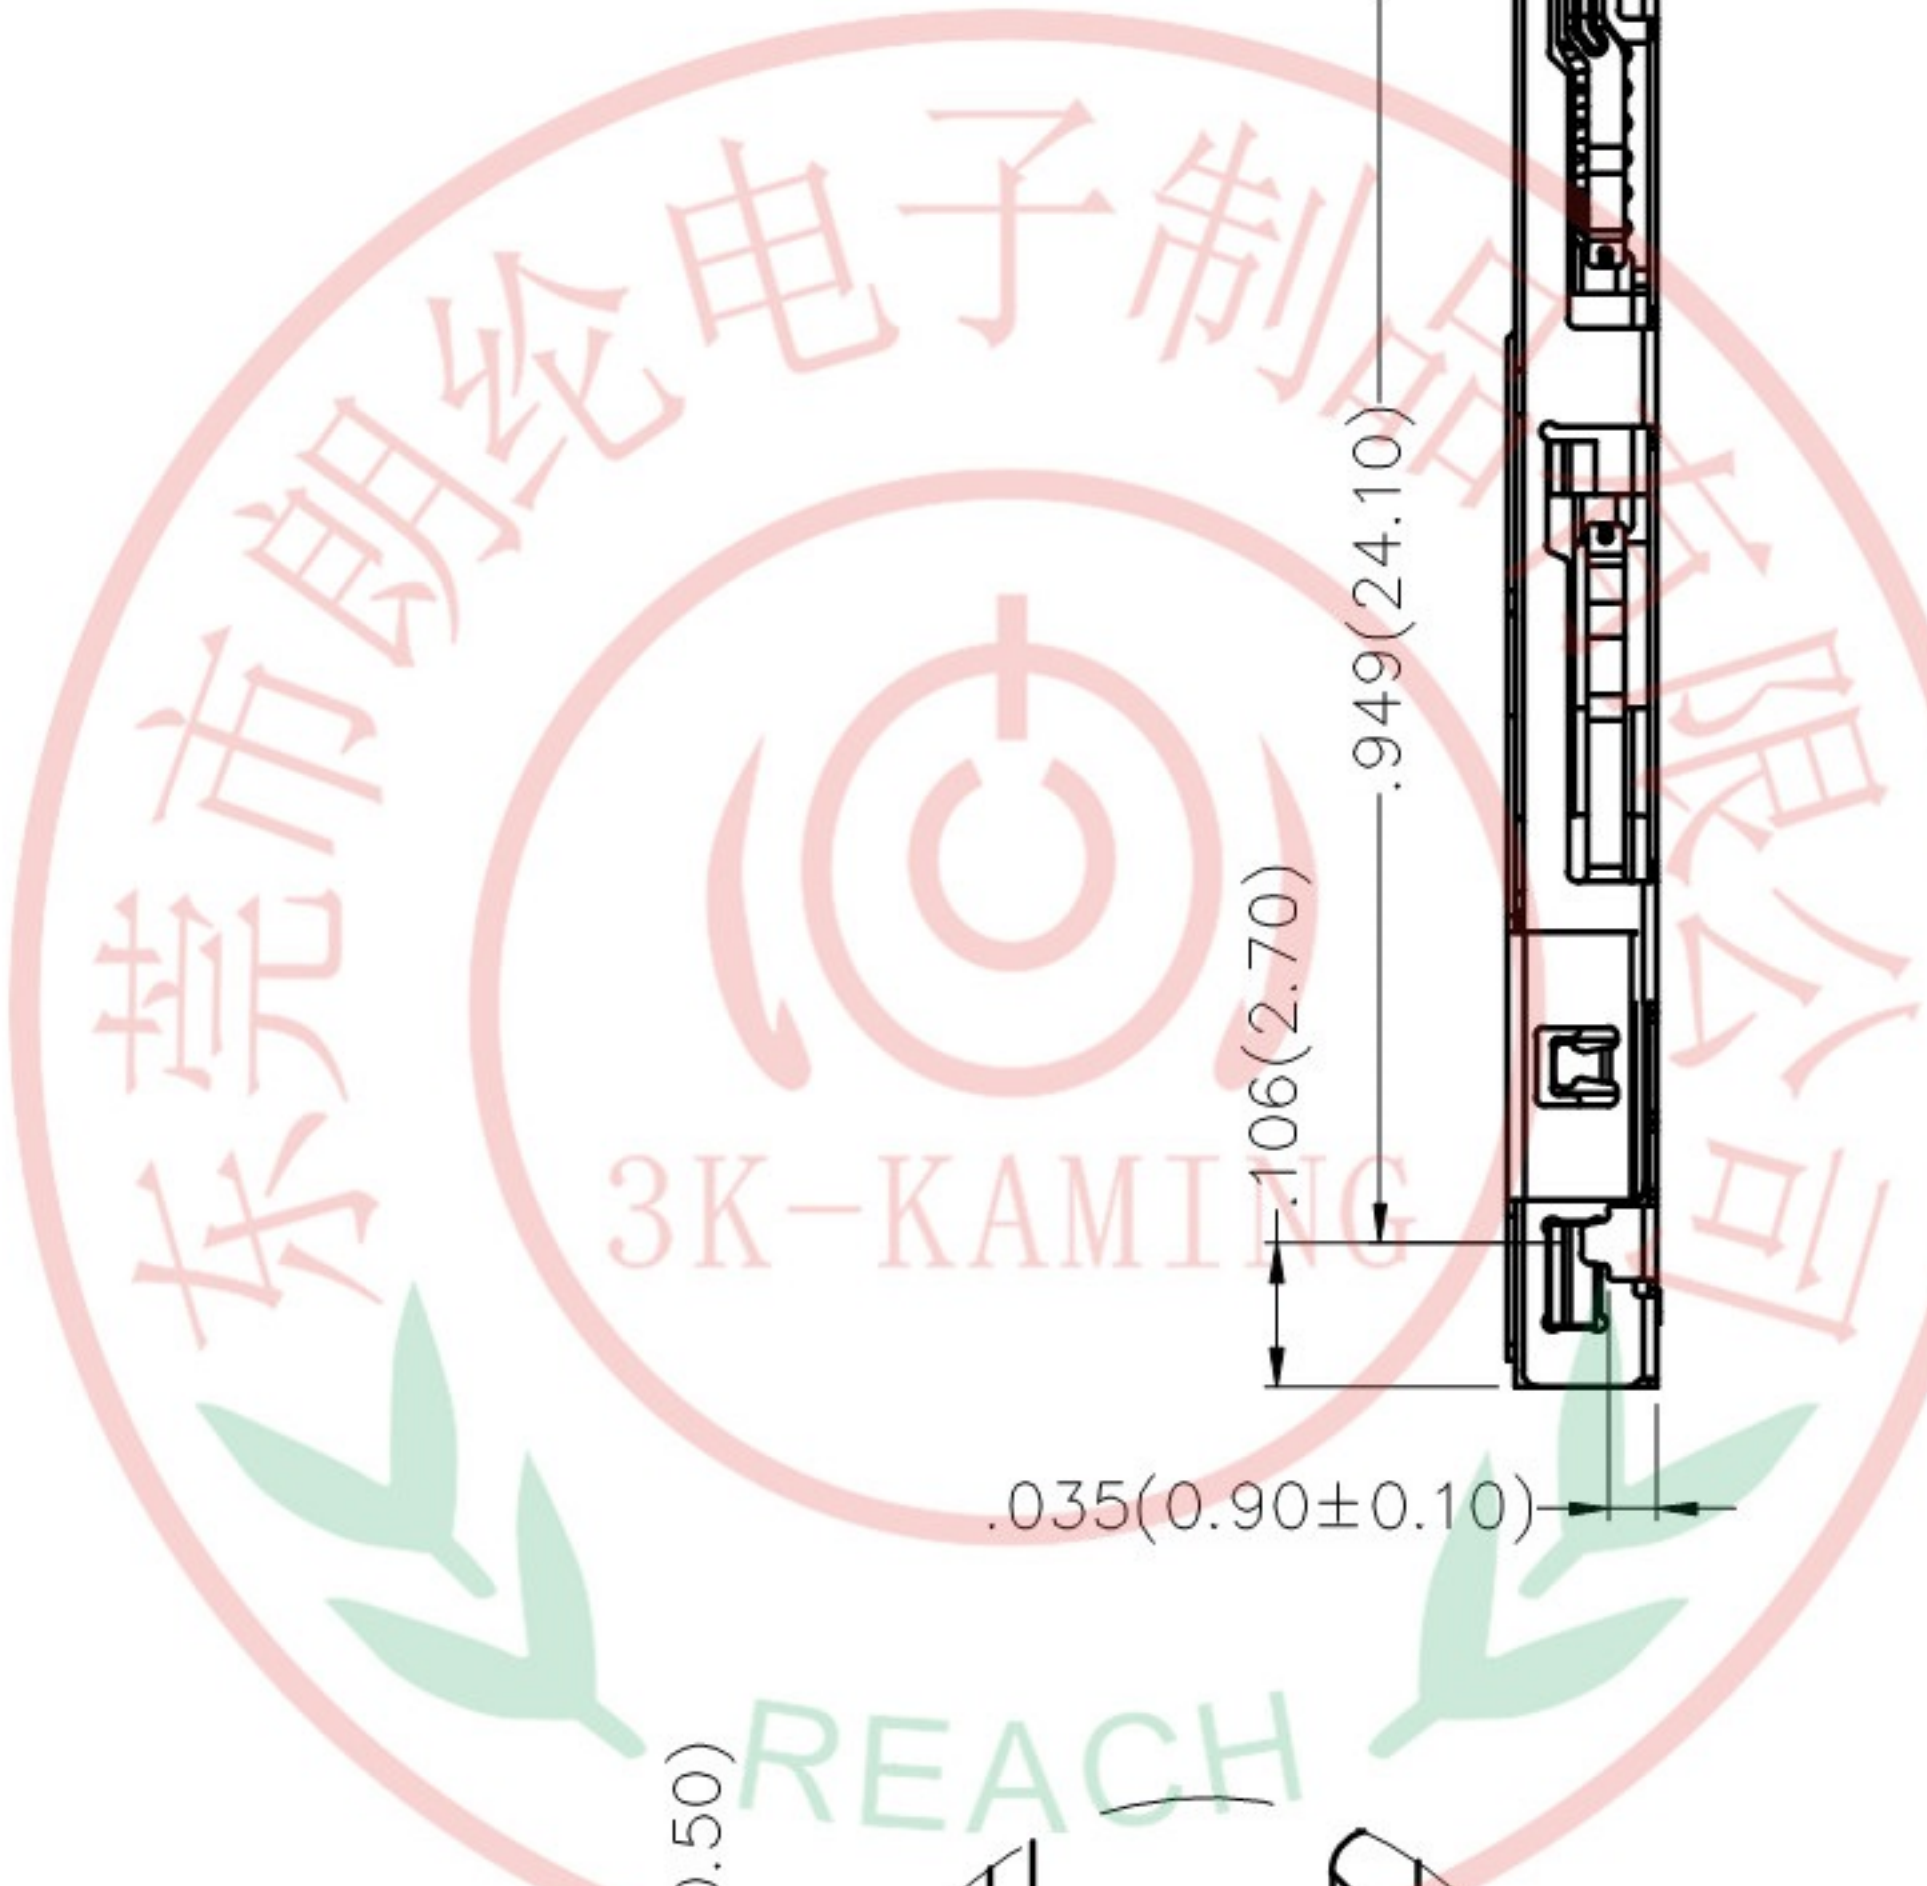
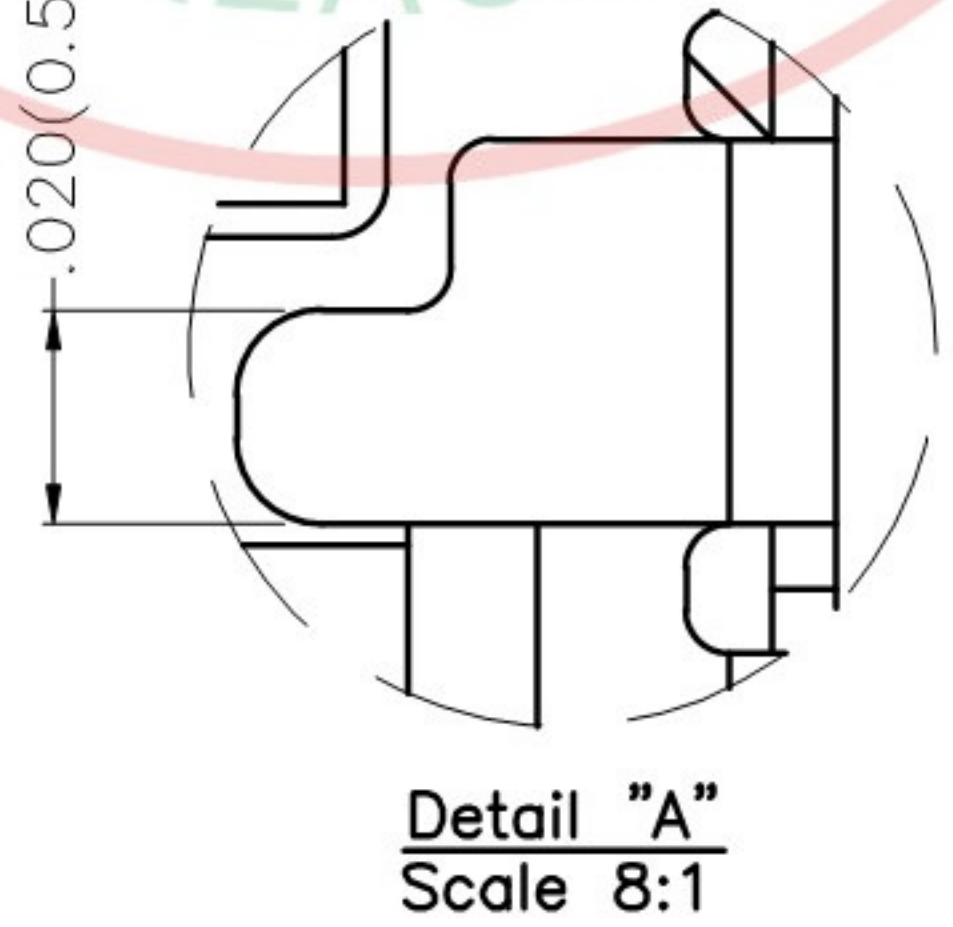
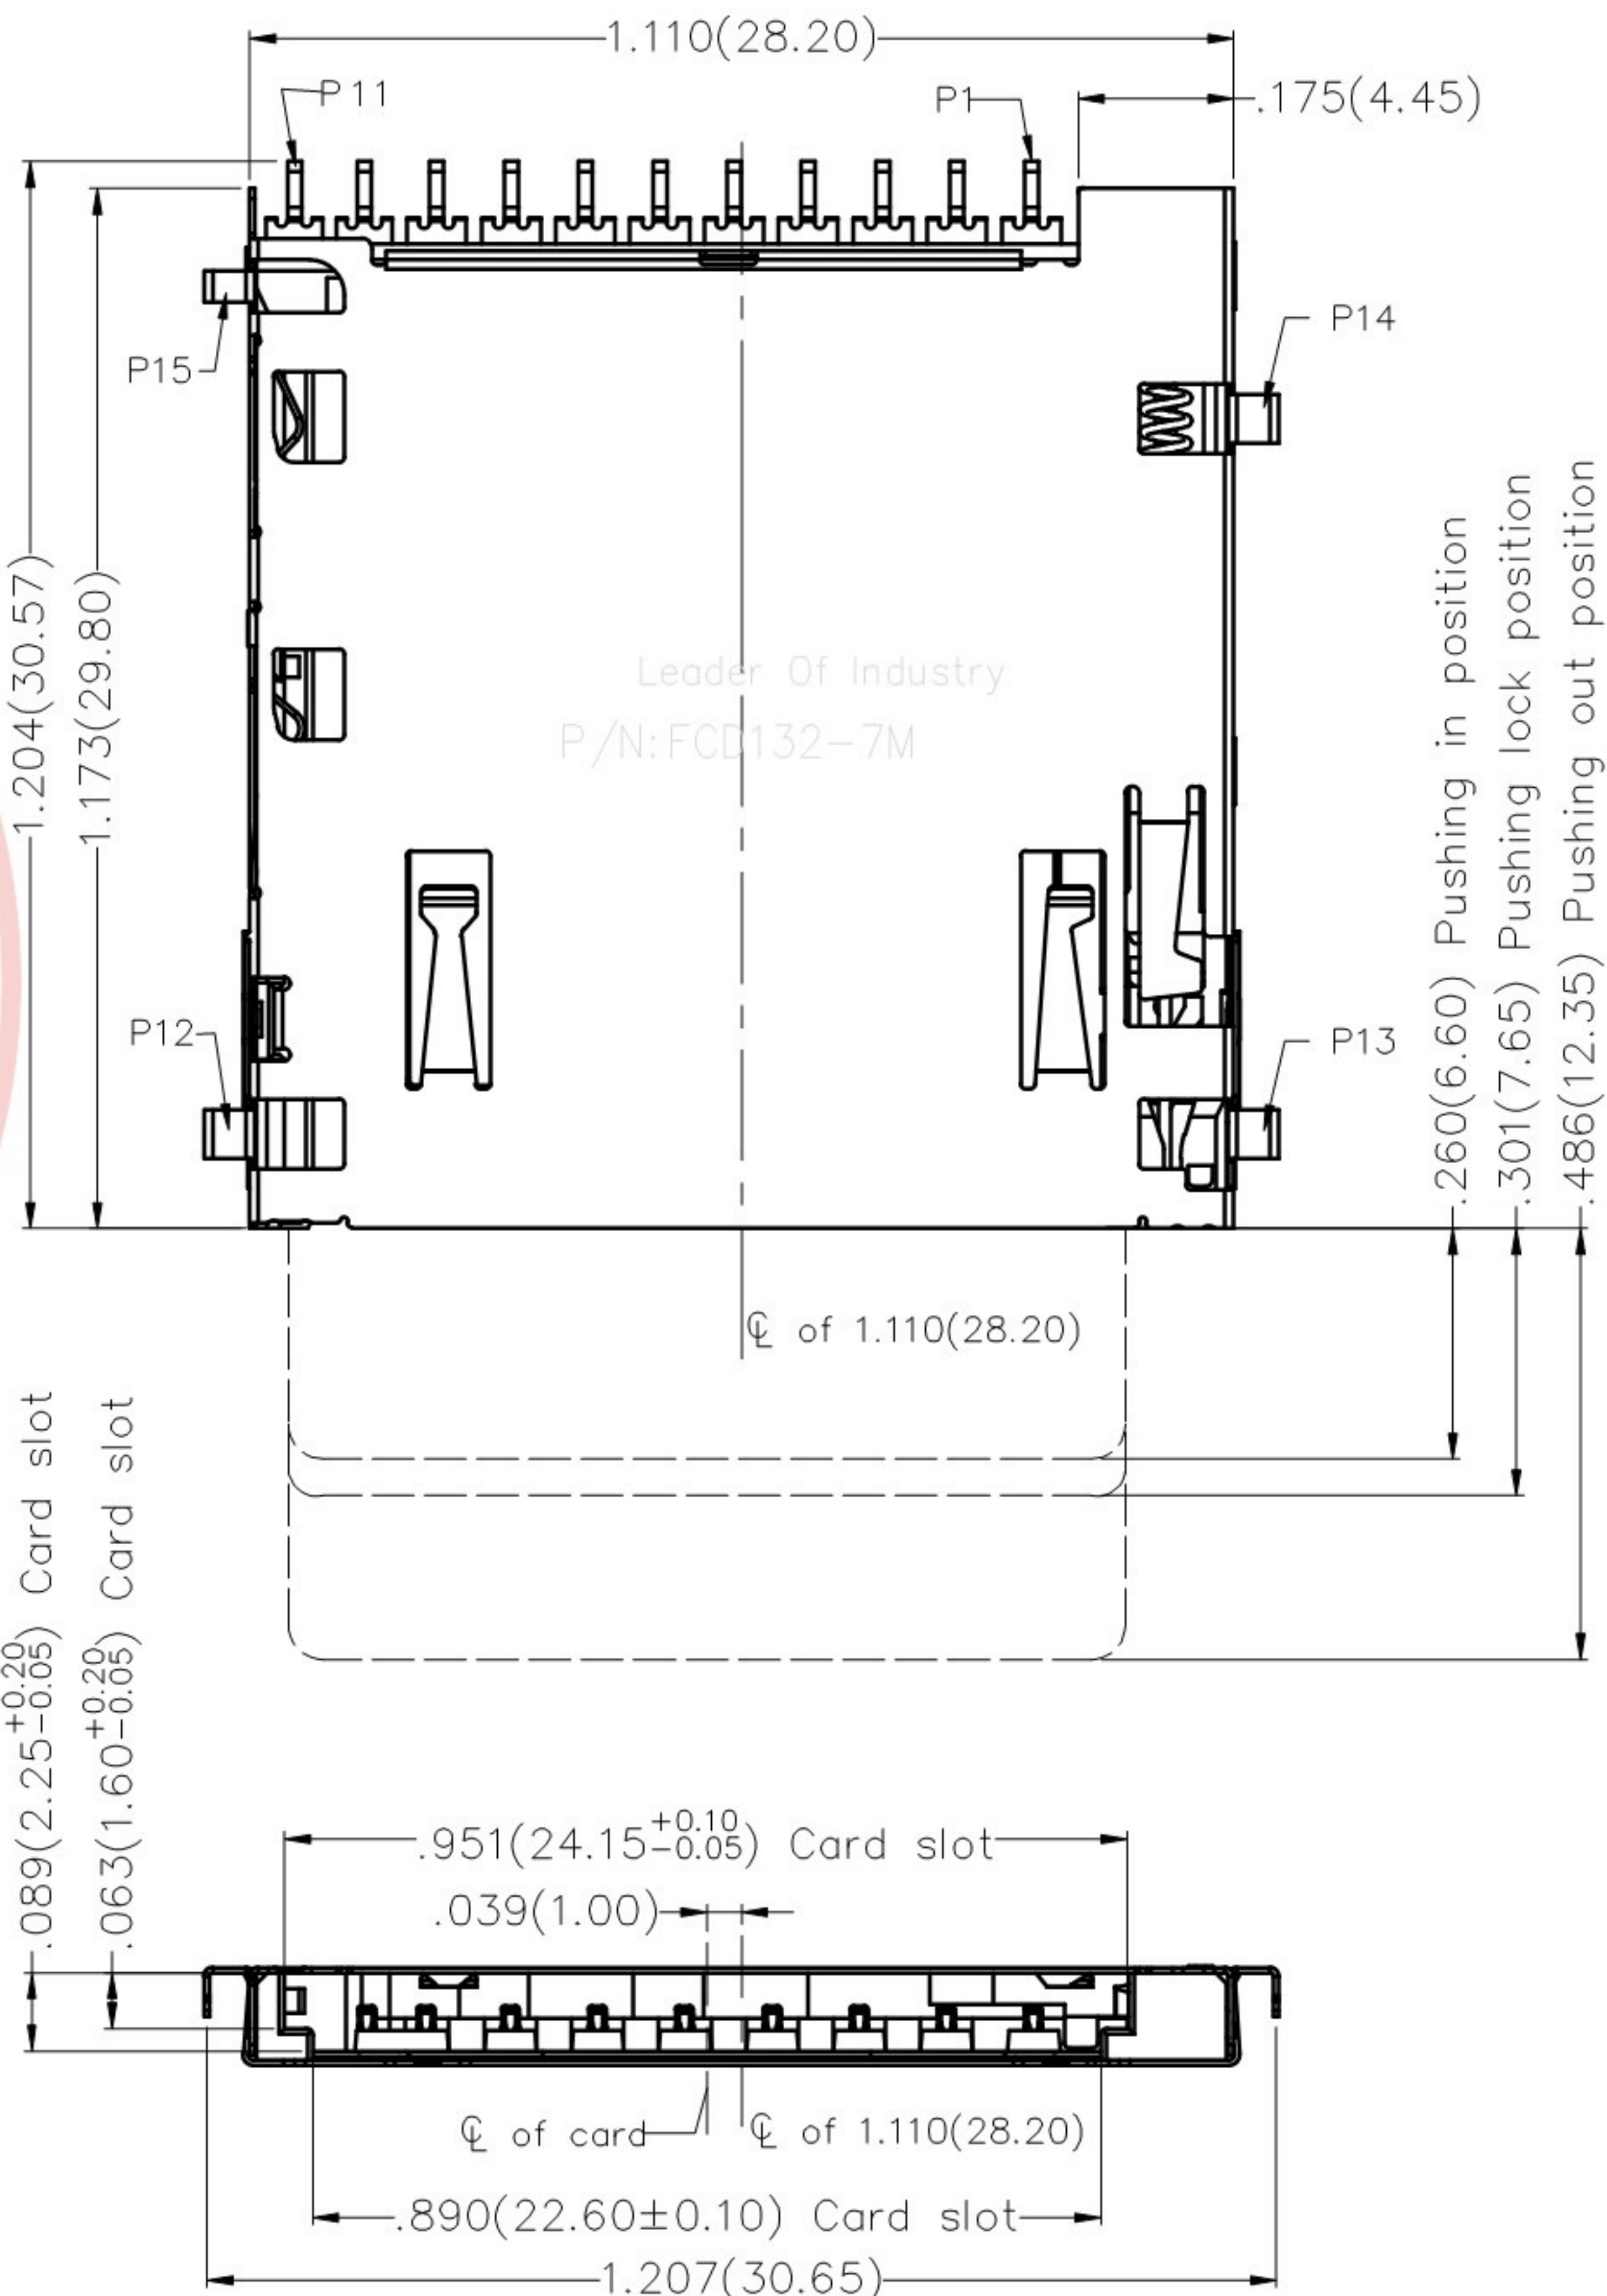
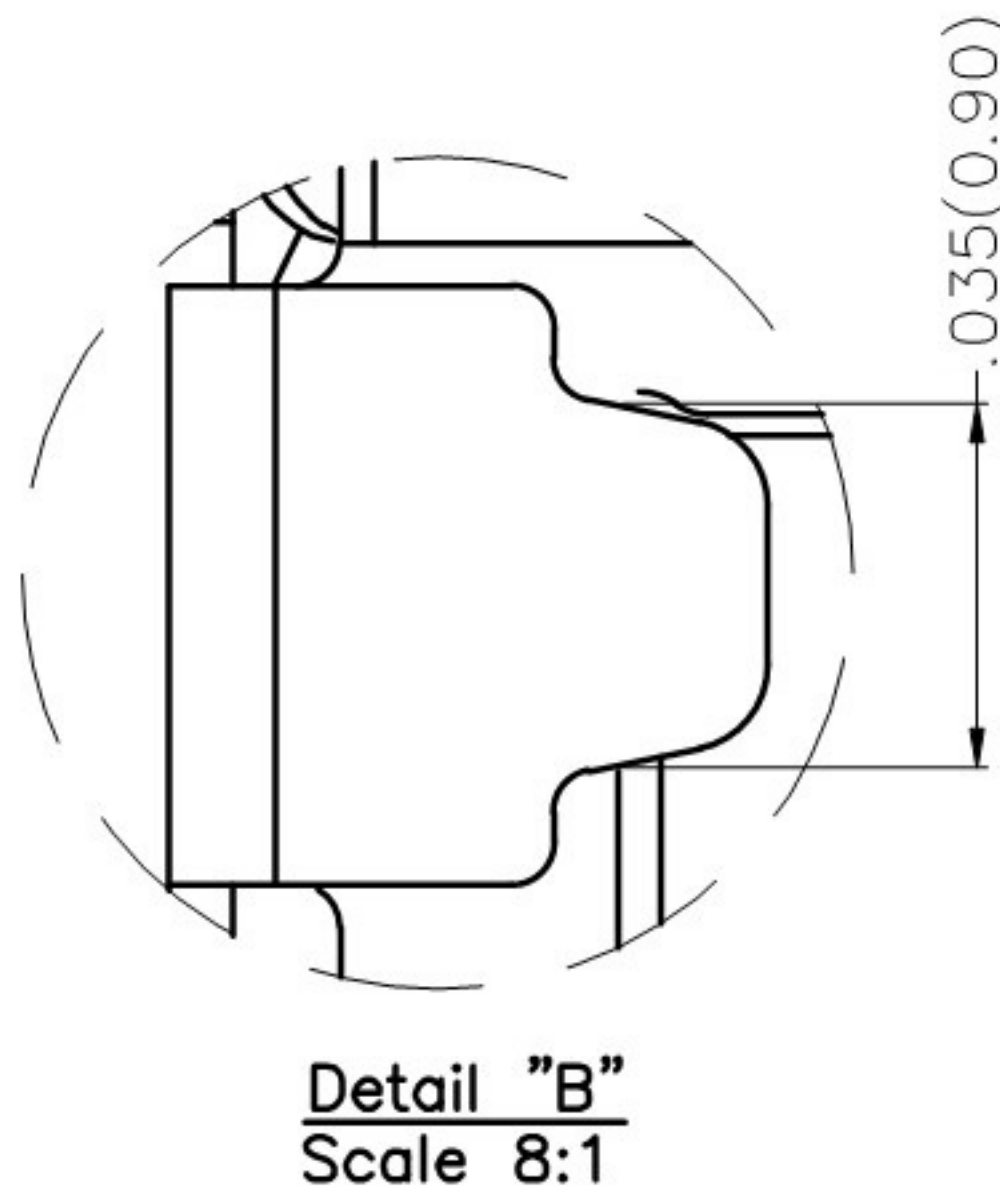


REV		LOCATIONS		DESCRIPTION		DATE	REVISER	APPD

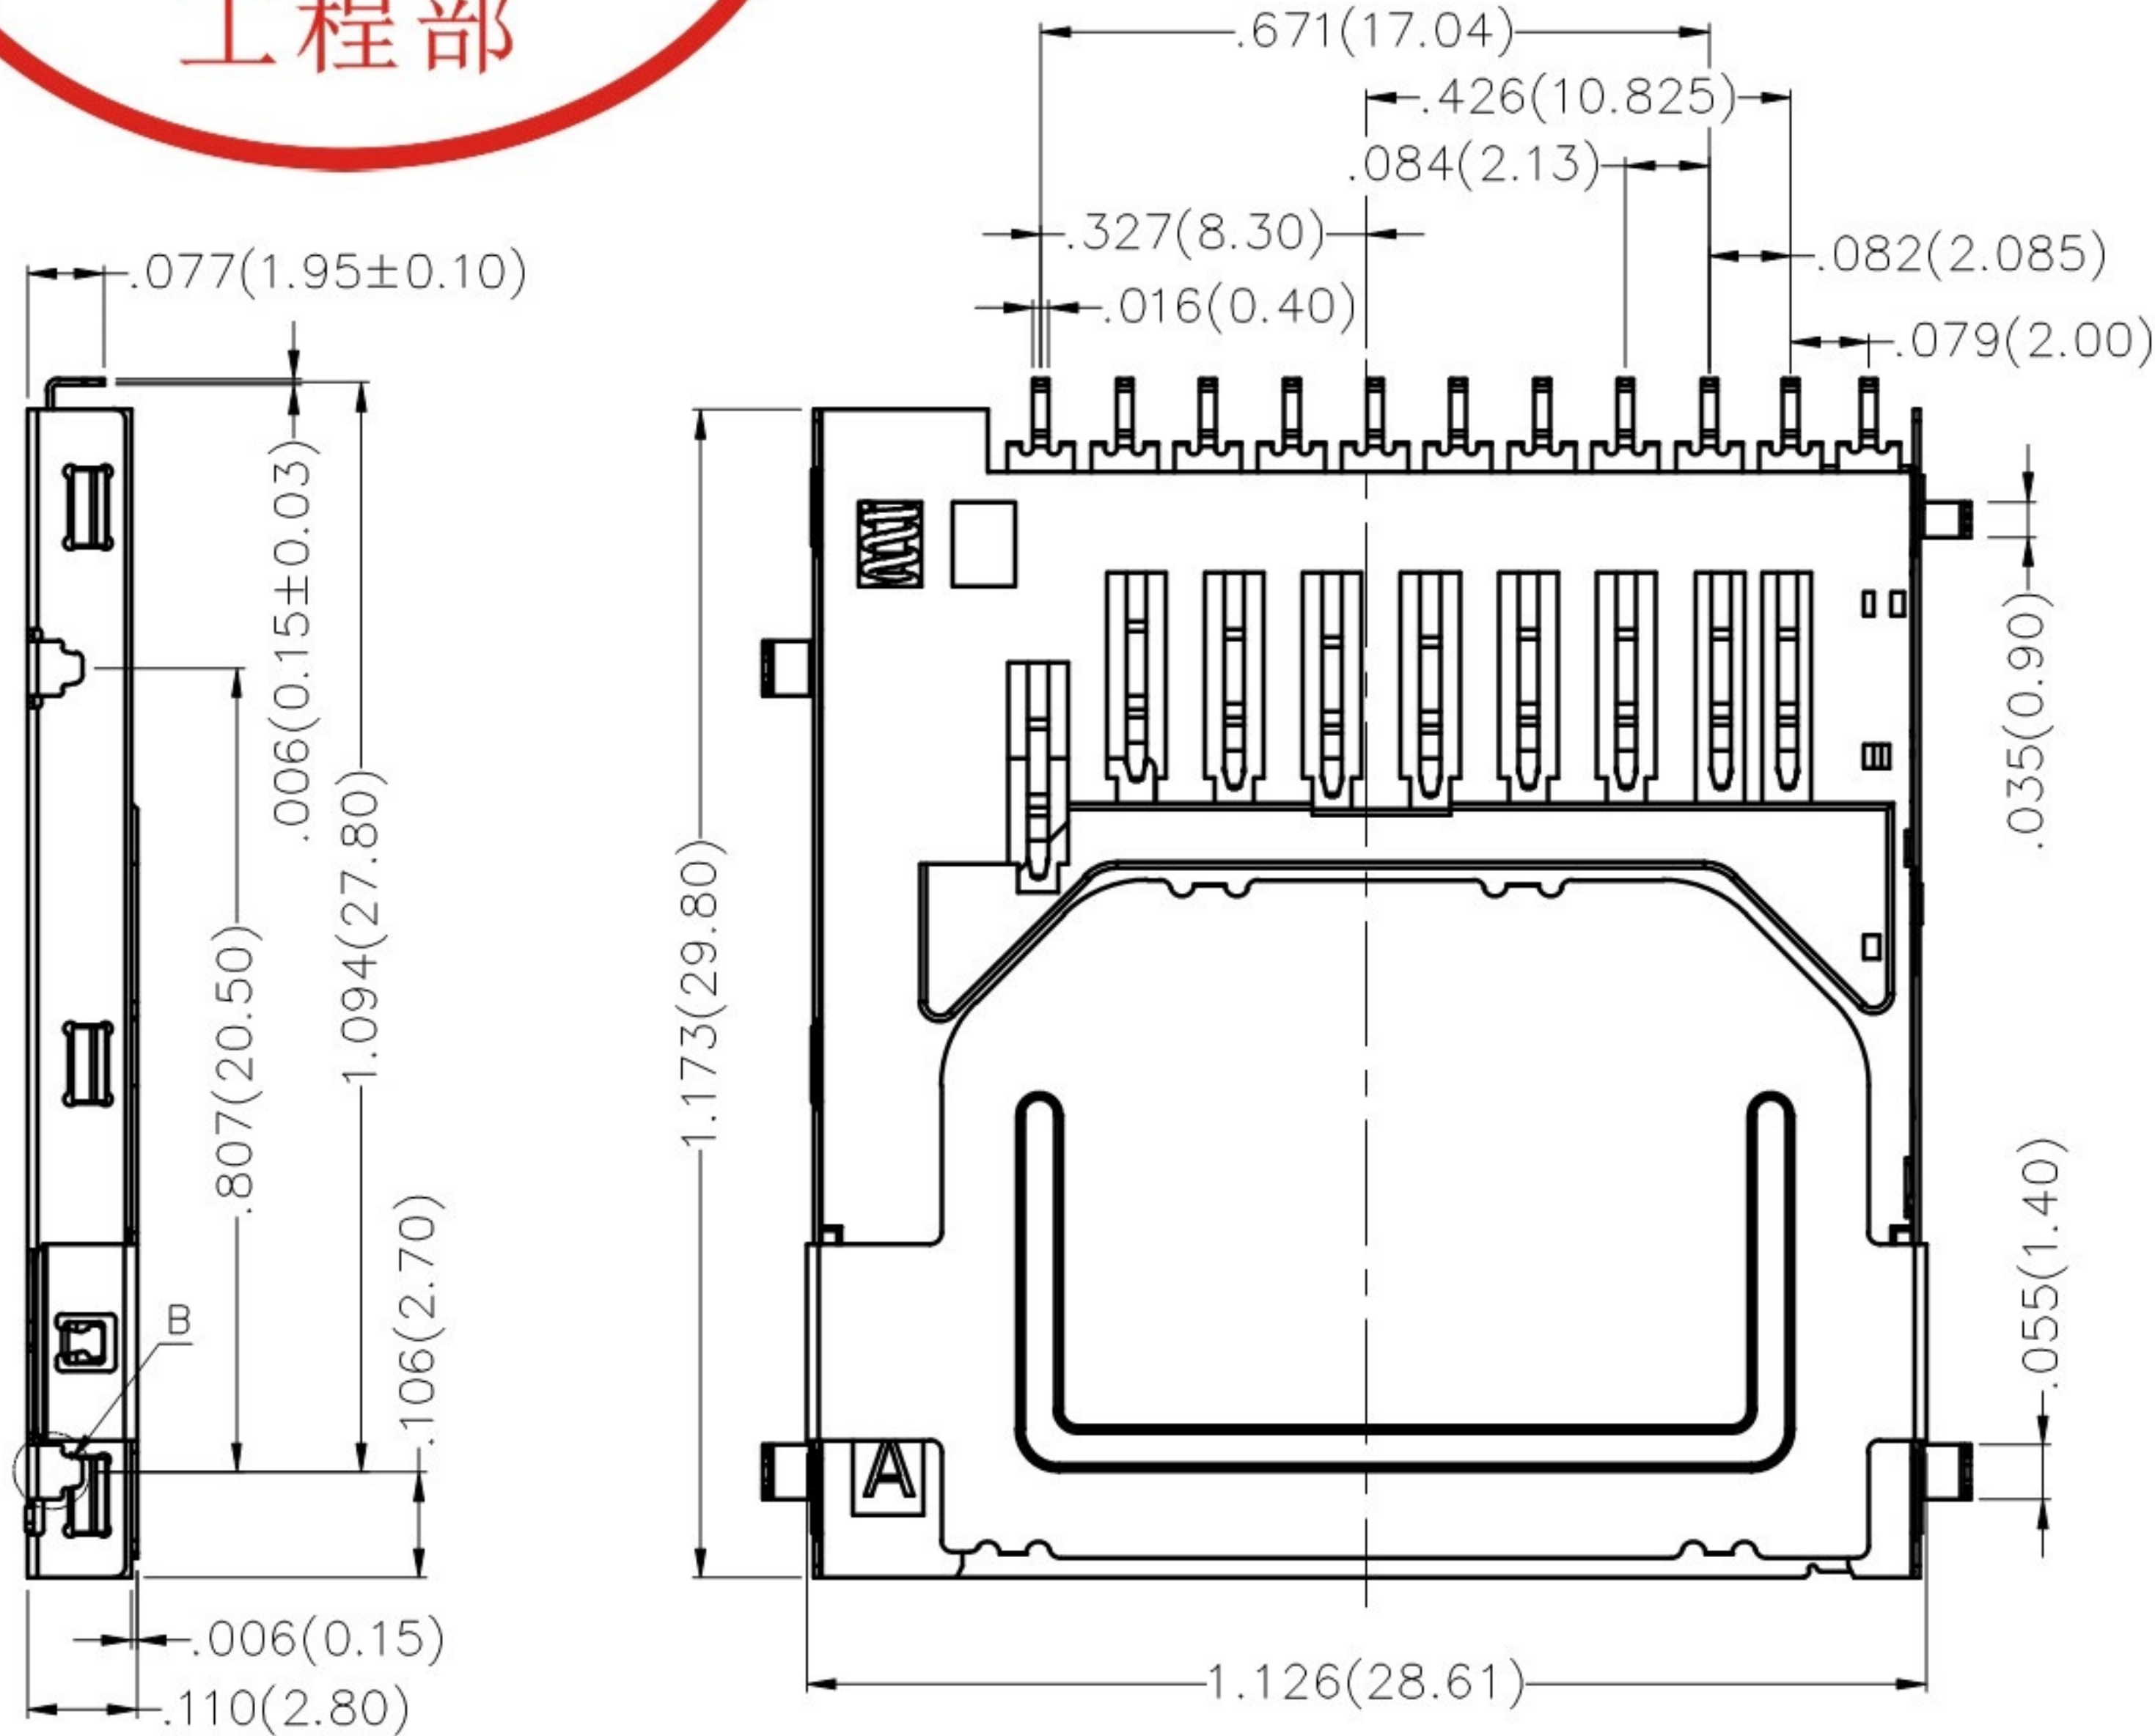

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 31/JUL/19	PART NO. FCD132-7M	ITEM NO. FCD132	 3K-KAMING®	
		X.±.012(0.30)	X'±5"	CHECKED BY	DATE	TITLE SD card connector (H=2.8mm)			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X'±2"	CHERRY	31/JUL/19			REV 0	
		X.XX±.006(0.15)	.XX'±1"	DRAWN BY	DATE				
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5"	KATE	31/JUL/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

LOCATIONS SPECIFICATIONS

Electrical


Current Rating: 0.5A AC(rms)/DC
Voltage Rating: 100V AC(rms)/DC
Contact Resistance: 100 mΩ Max
Insulation Resistance: 1000 MΩ Min/DC 250V
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -25°C~+85°C

Material

Housing: LCP (UL 94V-0) Black
Contact: Copper alloy
Shell: Stainless steel


Plating

Contact: 1μ" gold in contact area, Matte tin on solder area,
Nickel plated overall
Shell: Nickel plated overall

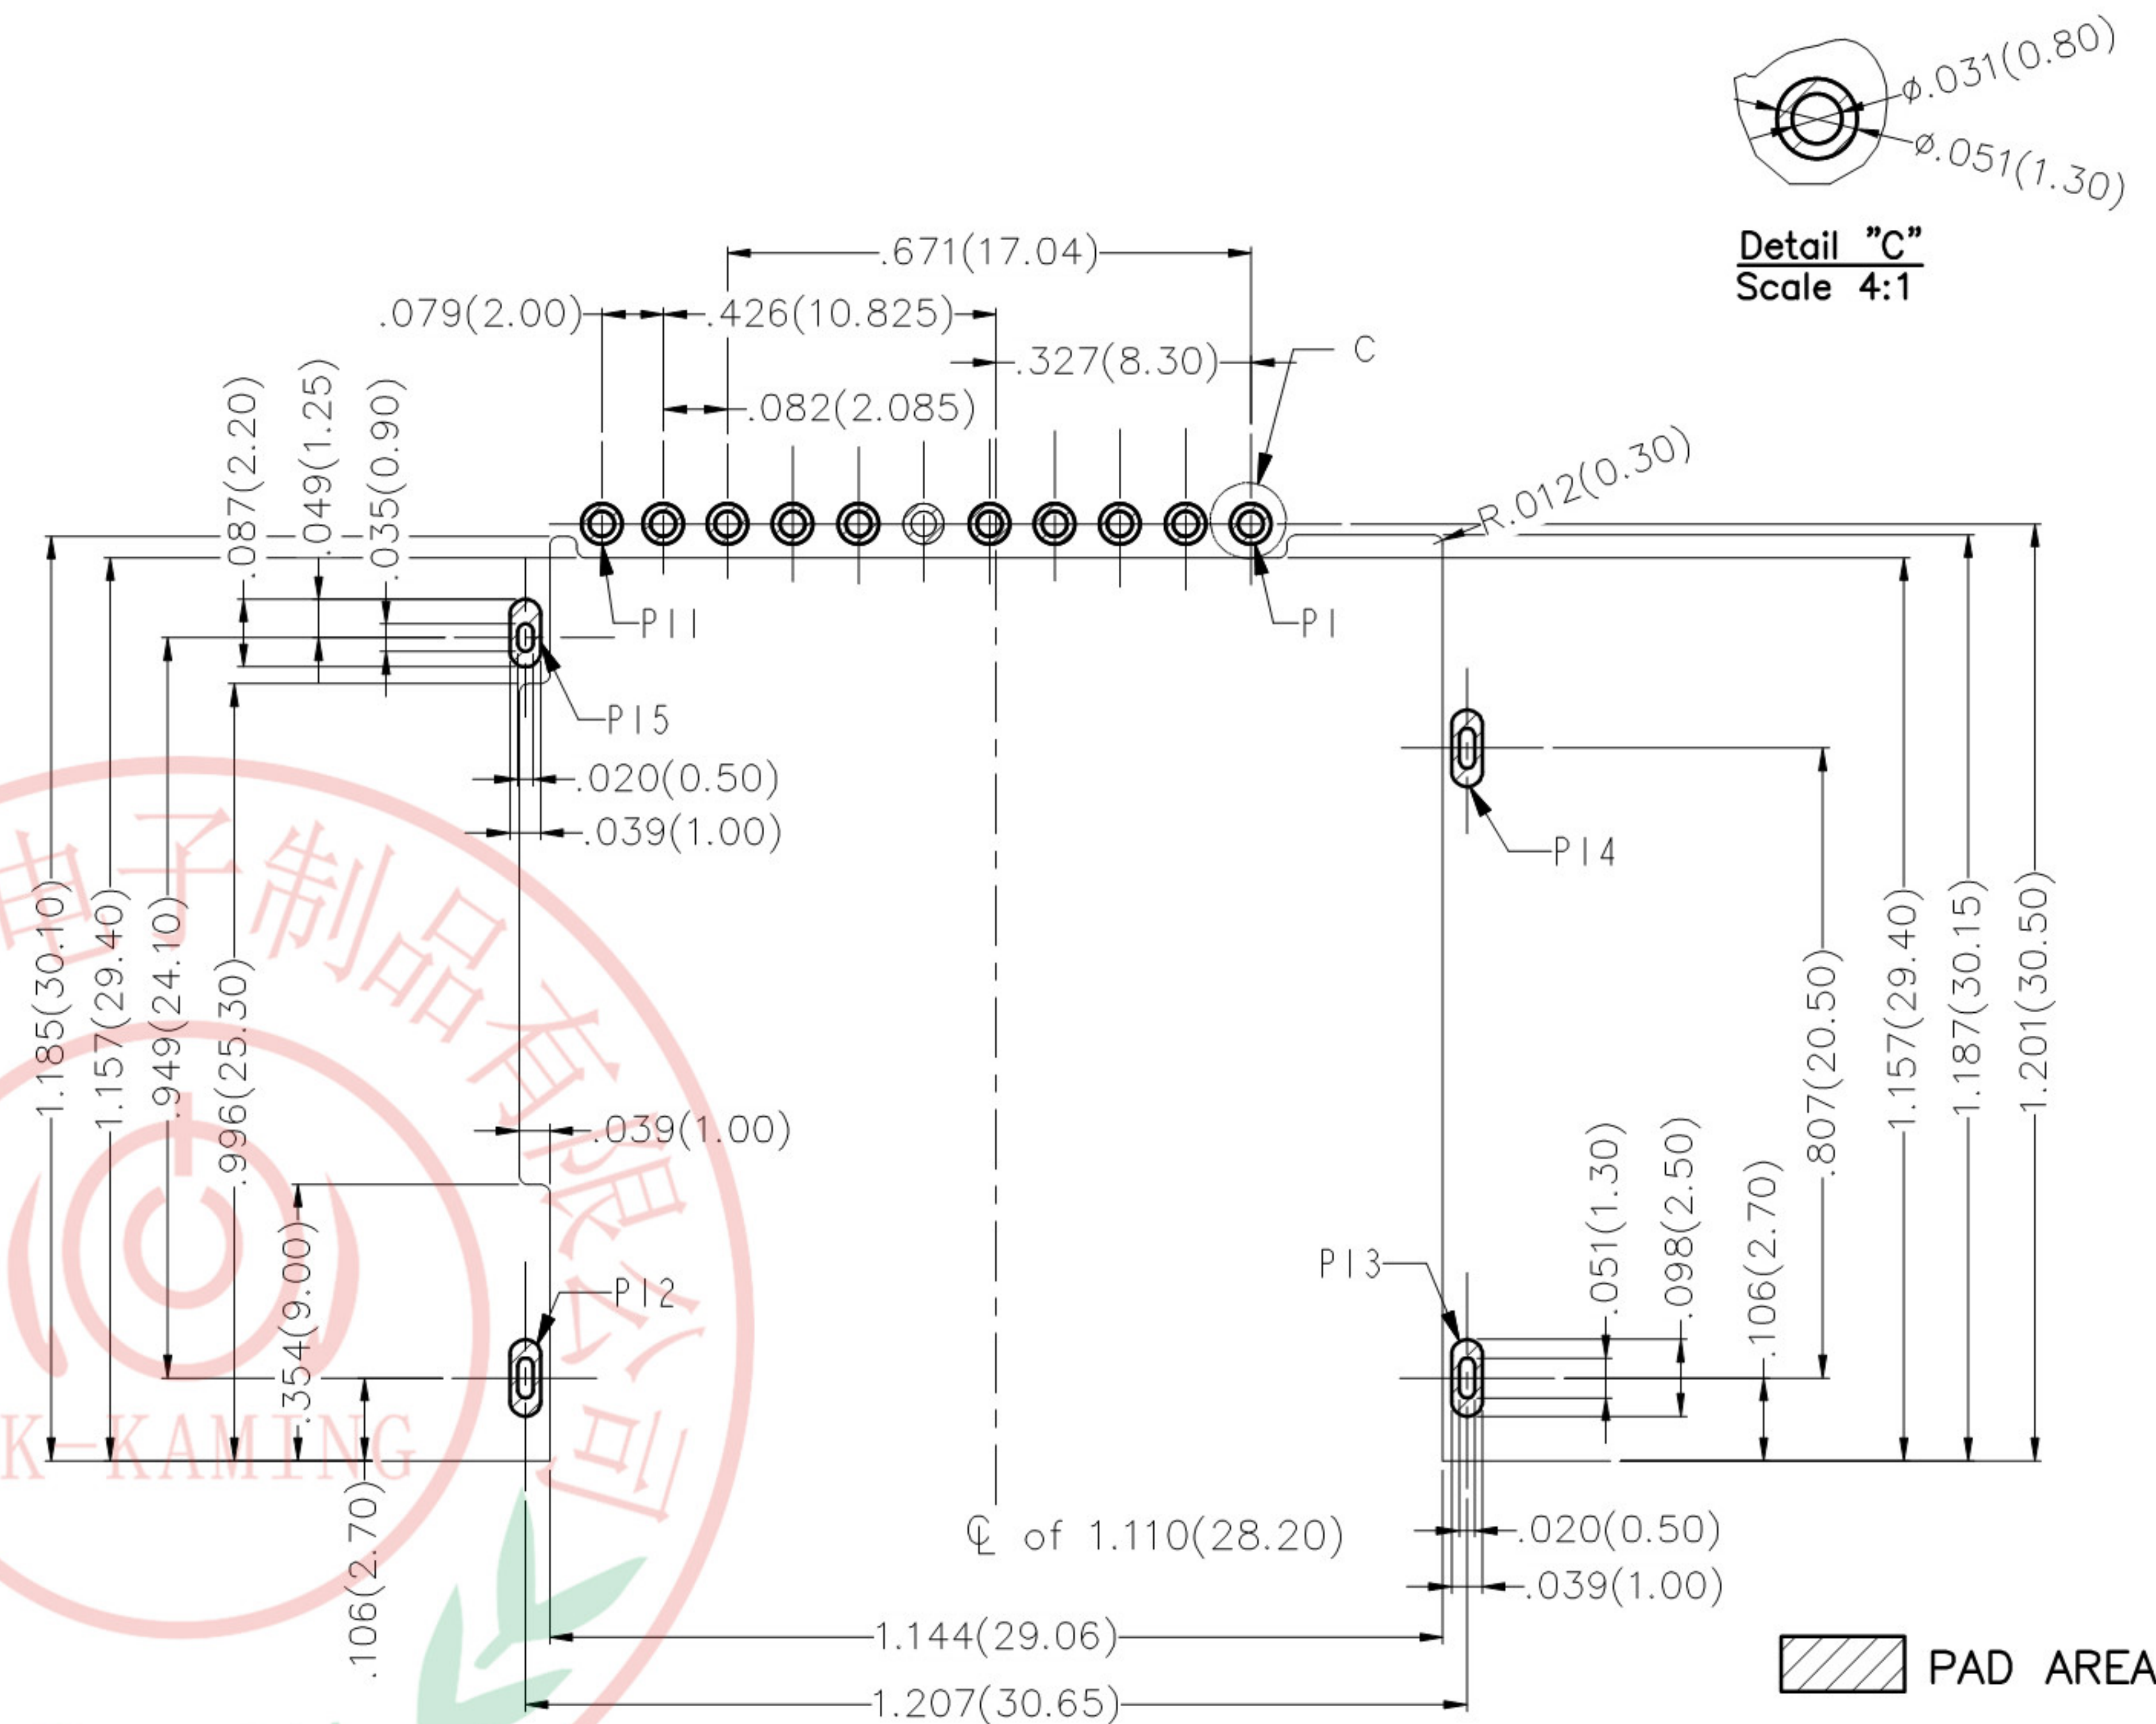

PIN NO.	PIN DEFINE	PIN NO.	PIN DEFINE
P1	DAT2	P7	VSS
P2	CD/DAT3	P8	DAT0
P3	CMD	P9	DAT1
P4	VSS	P10	WP SW
P5	VDD	P11	CD SW
P6	CLK	P12	GND SW




	PROTECT	CONTACT	DETECT	CONTACT
	WRITE PROTECT POSITION	WRITE ENABLE POSITION		
CARD UNINSERTION	CLOSE	CLOSE		CLOSE
CARD HALF INSERTION	OPEN	OPEN		CLOSE
CARD INSERTION	CLOSE	OPEN		OPEN

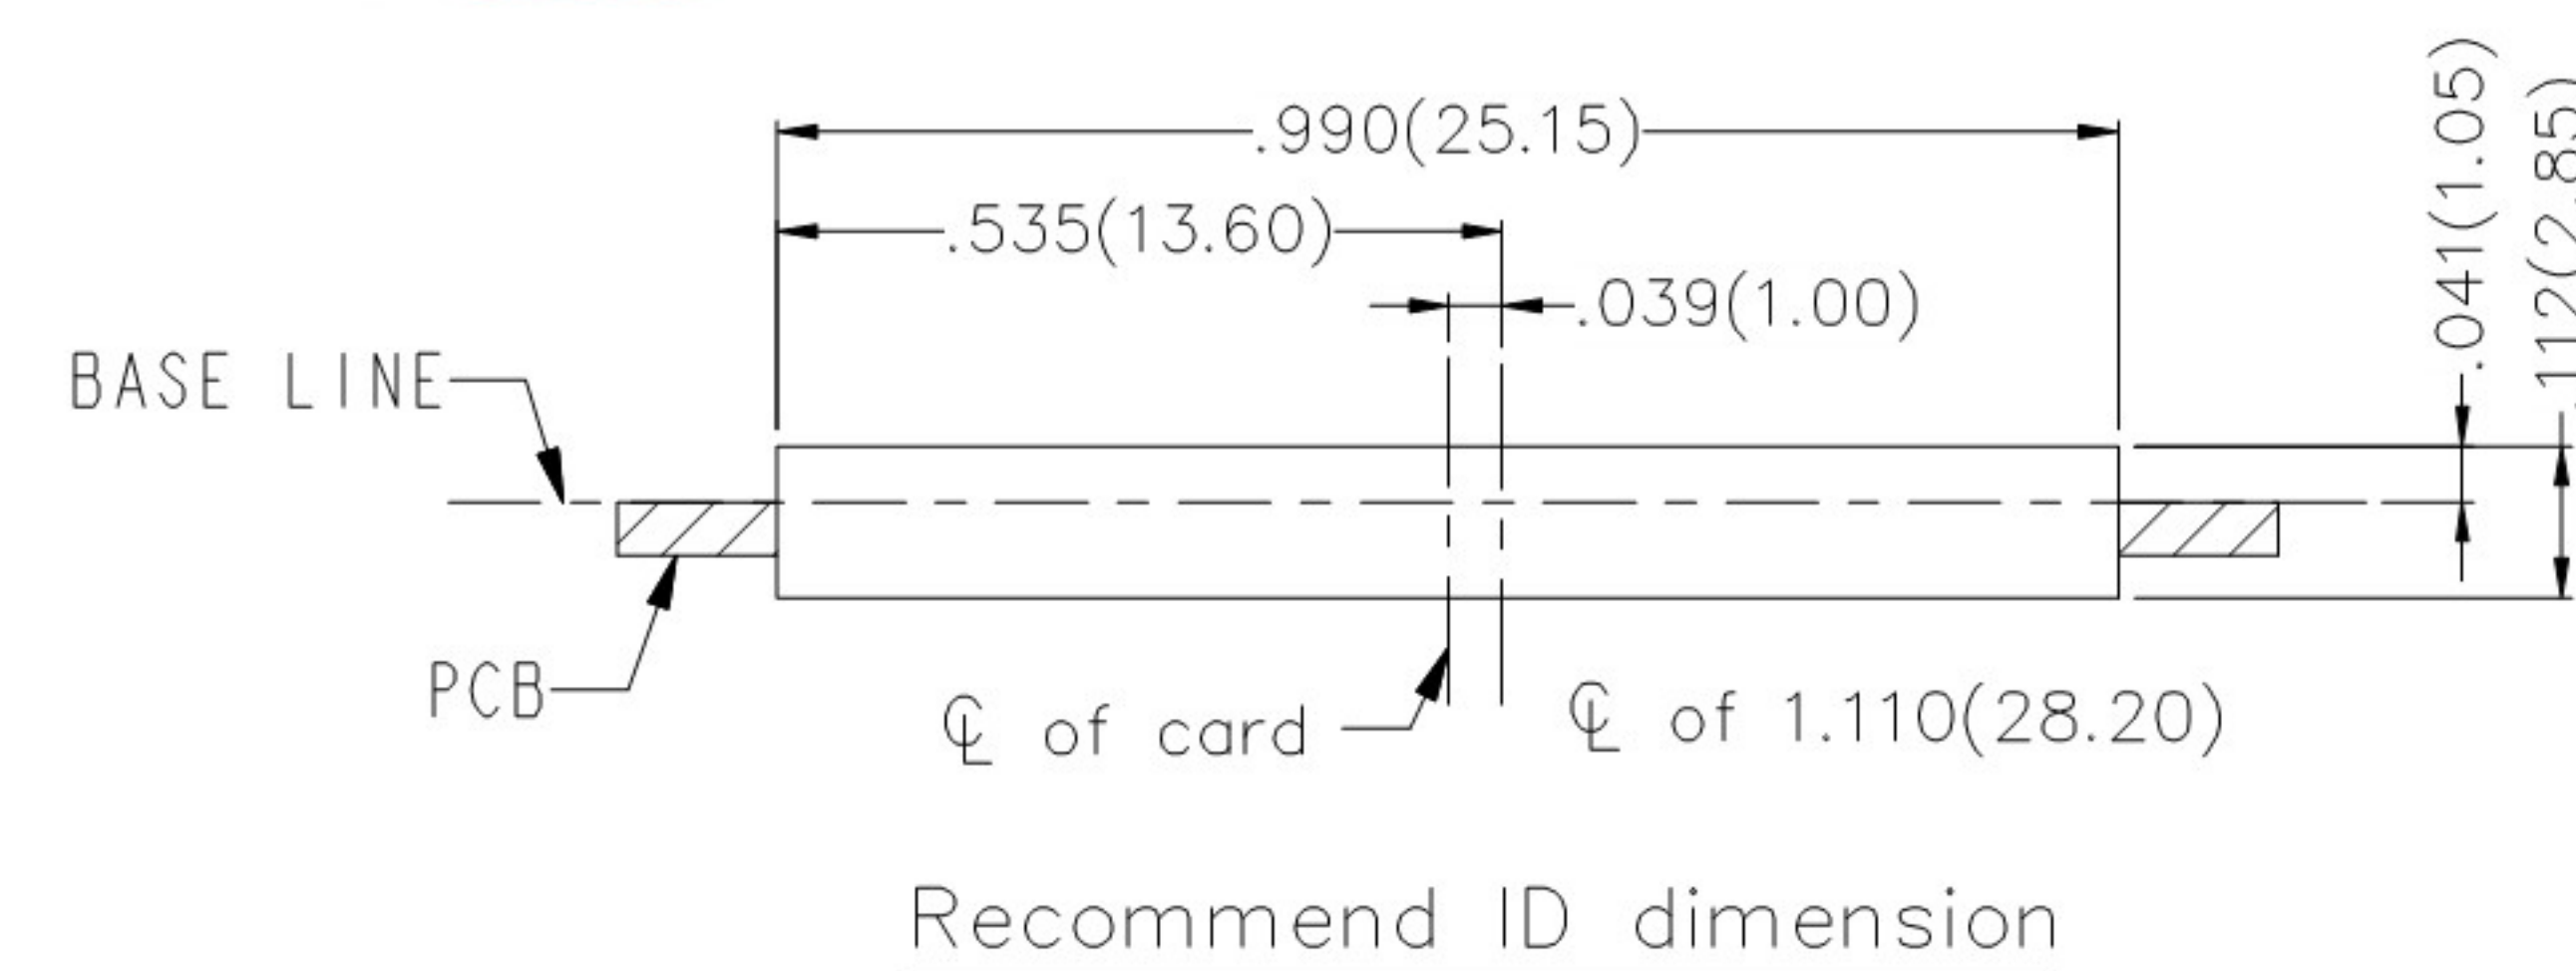



 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 31/JUL/19	PART NO. FCD132-7M	ITEM NO. FCD132	 3K-KAMING	
		X.±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE SD card connector (H=2.8mm)			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X.±2°	CHERRY	31/JUL/19			REV 0	
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°	DRAWN BY KATE	DATE 31/JUL/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	.XXX'±0.5°						

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- 1. 10 sprocket hole cumulative tolerance ± 0.2
 - 2. Carrier camber is within 1.0mm in 100mm
 - 3. Materlat: White Conductive polystyrene Alloy 100% recyclable
 - 4. All dimensions meet EIA-481-3 requirements
 - 5. Component load per 13" reel: 650 pcs

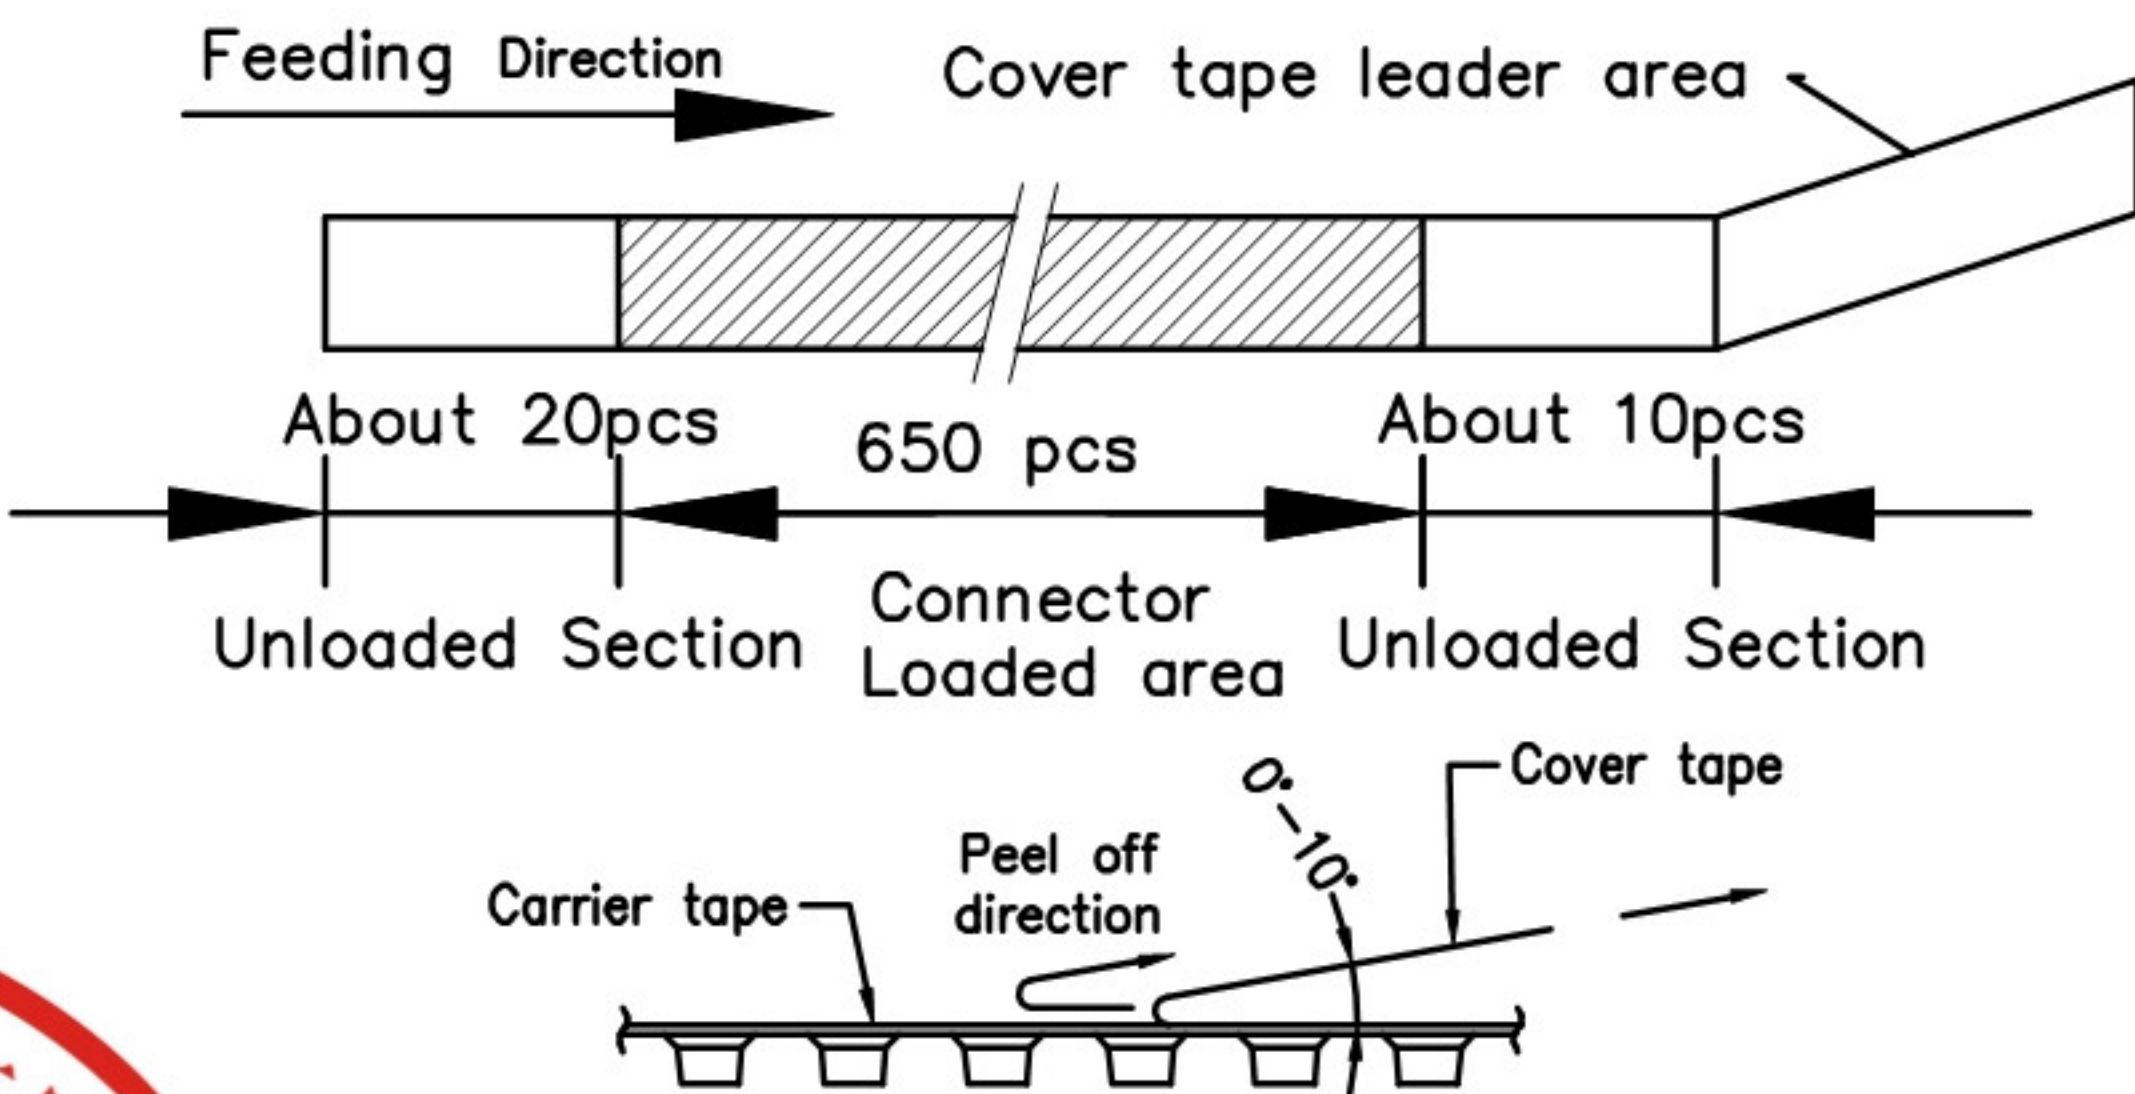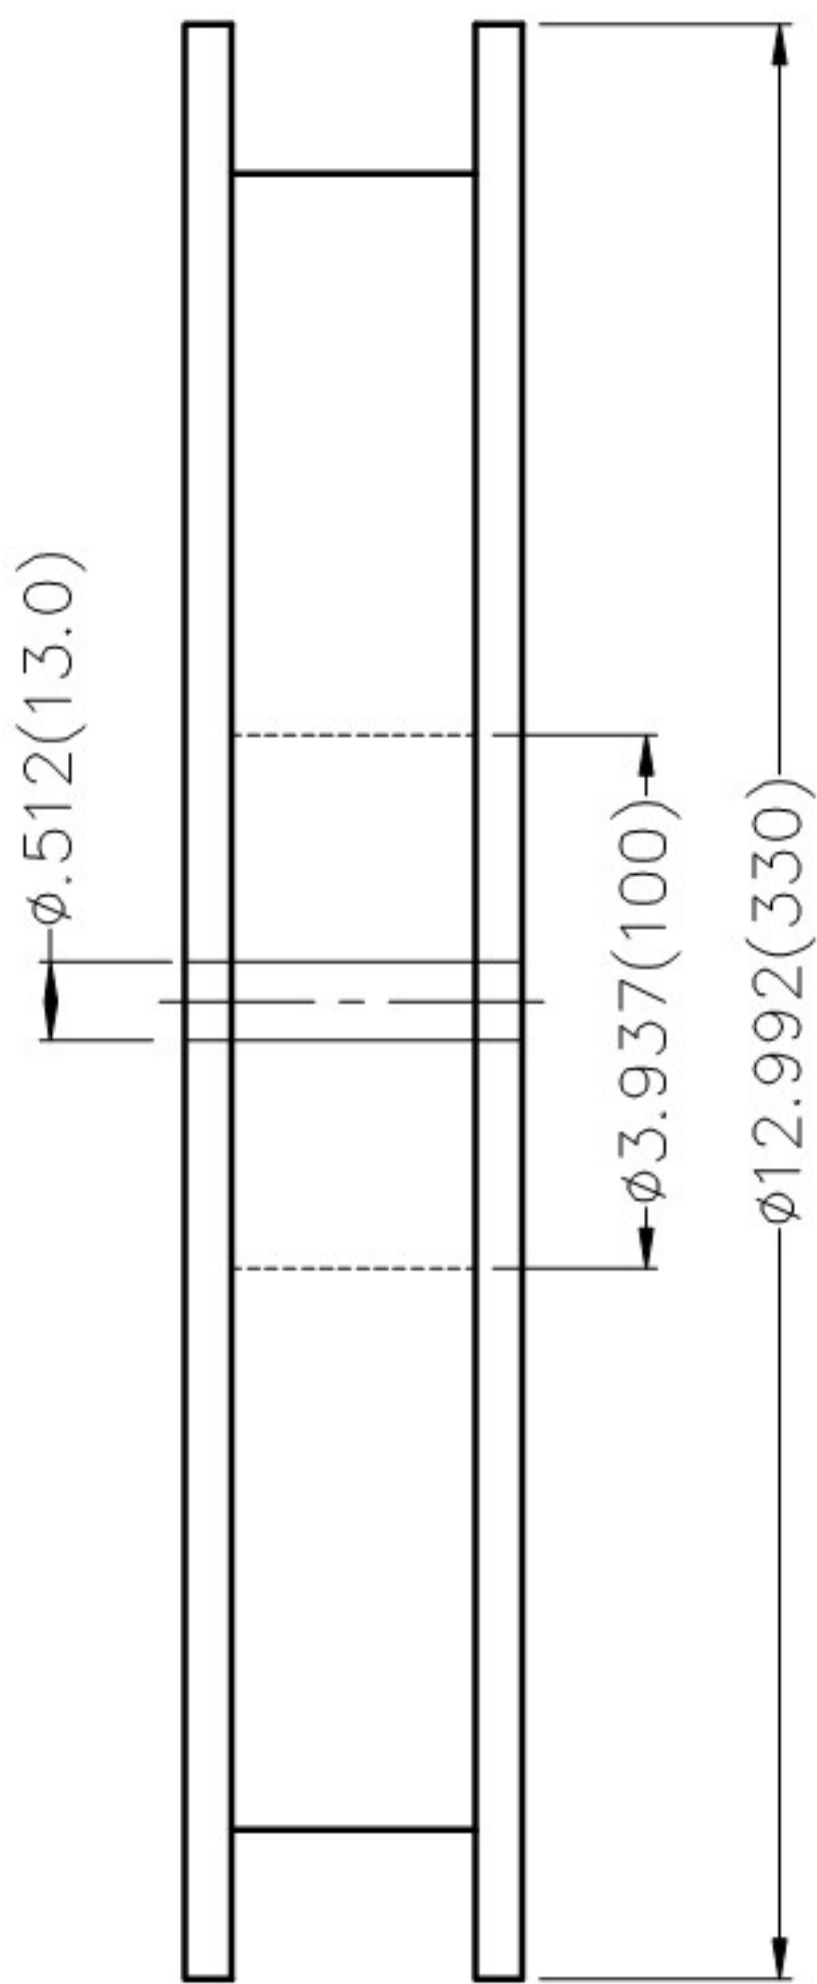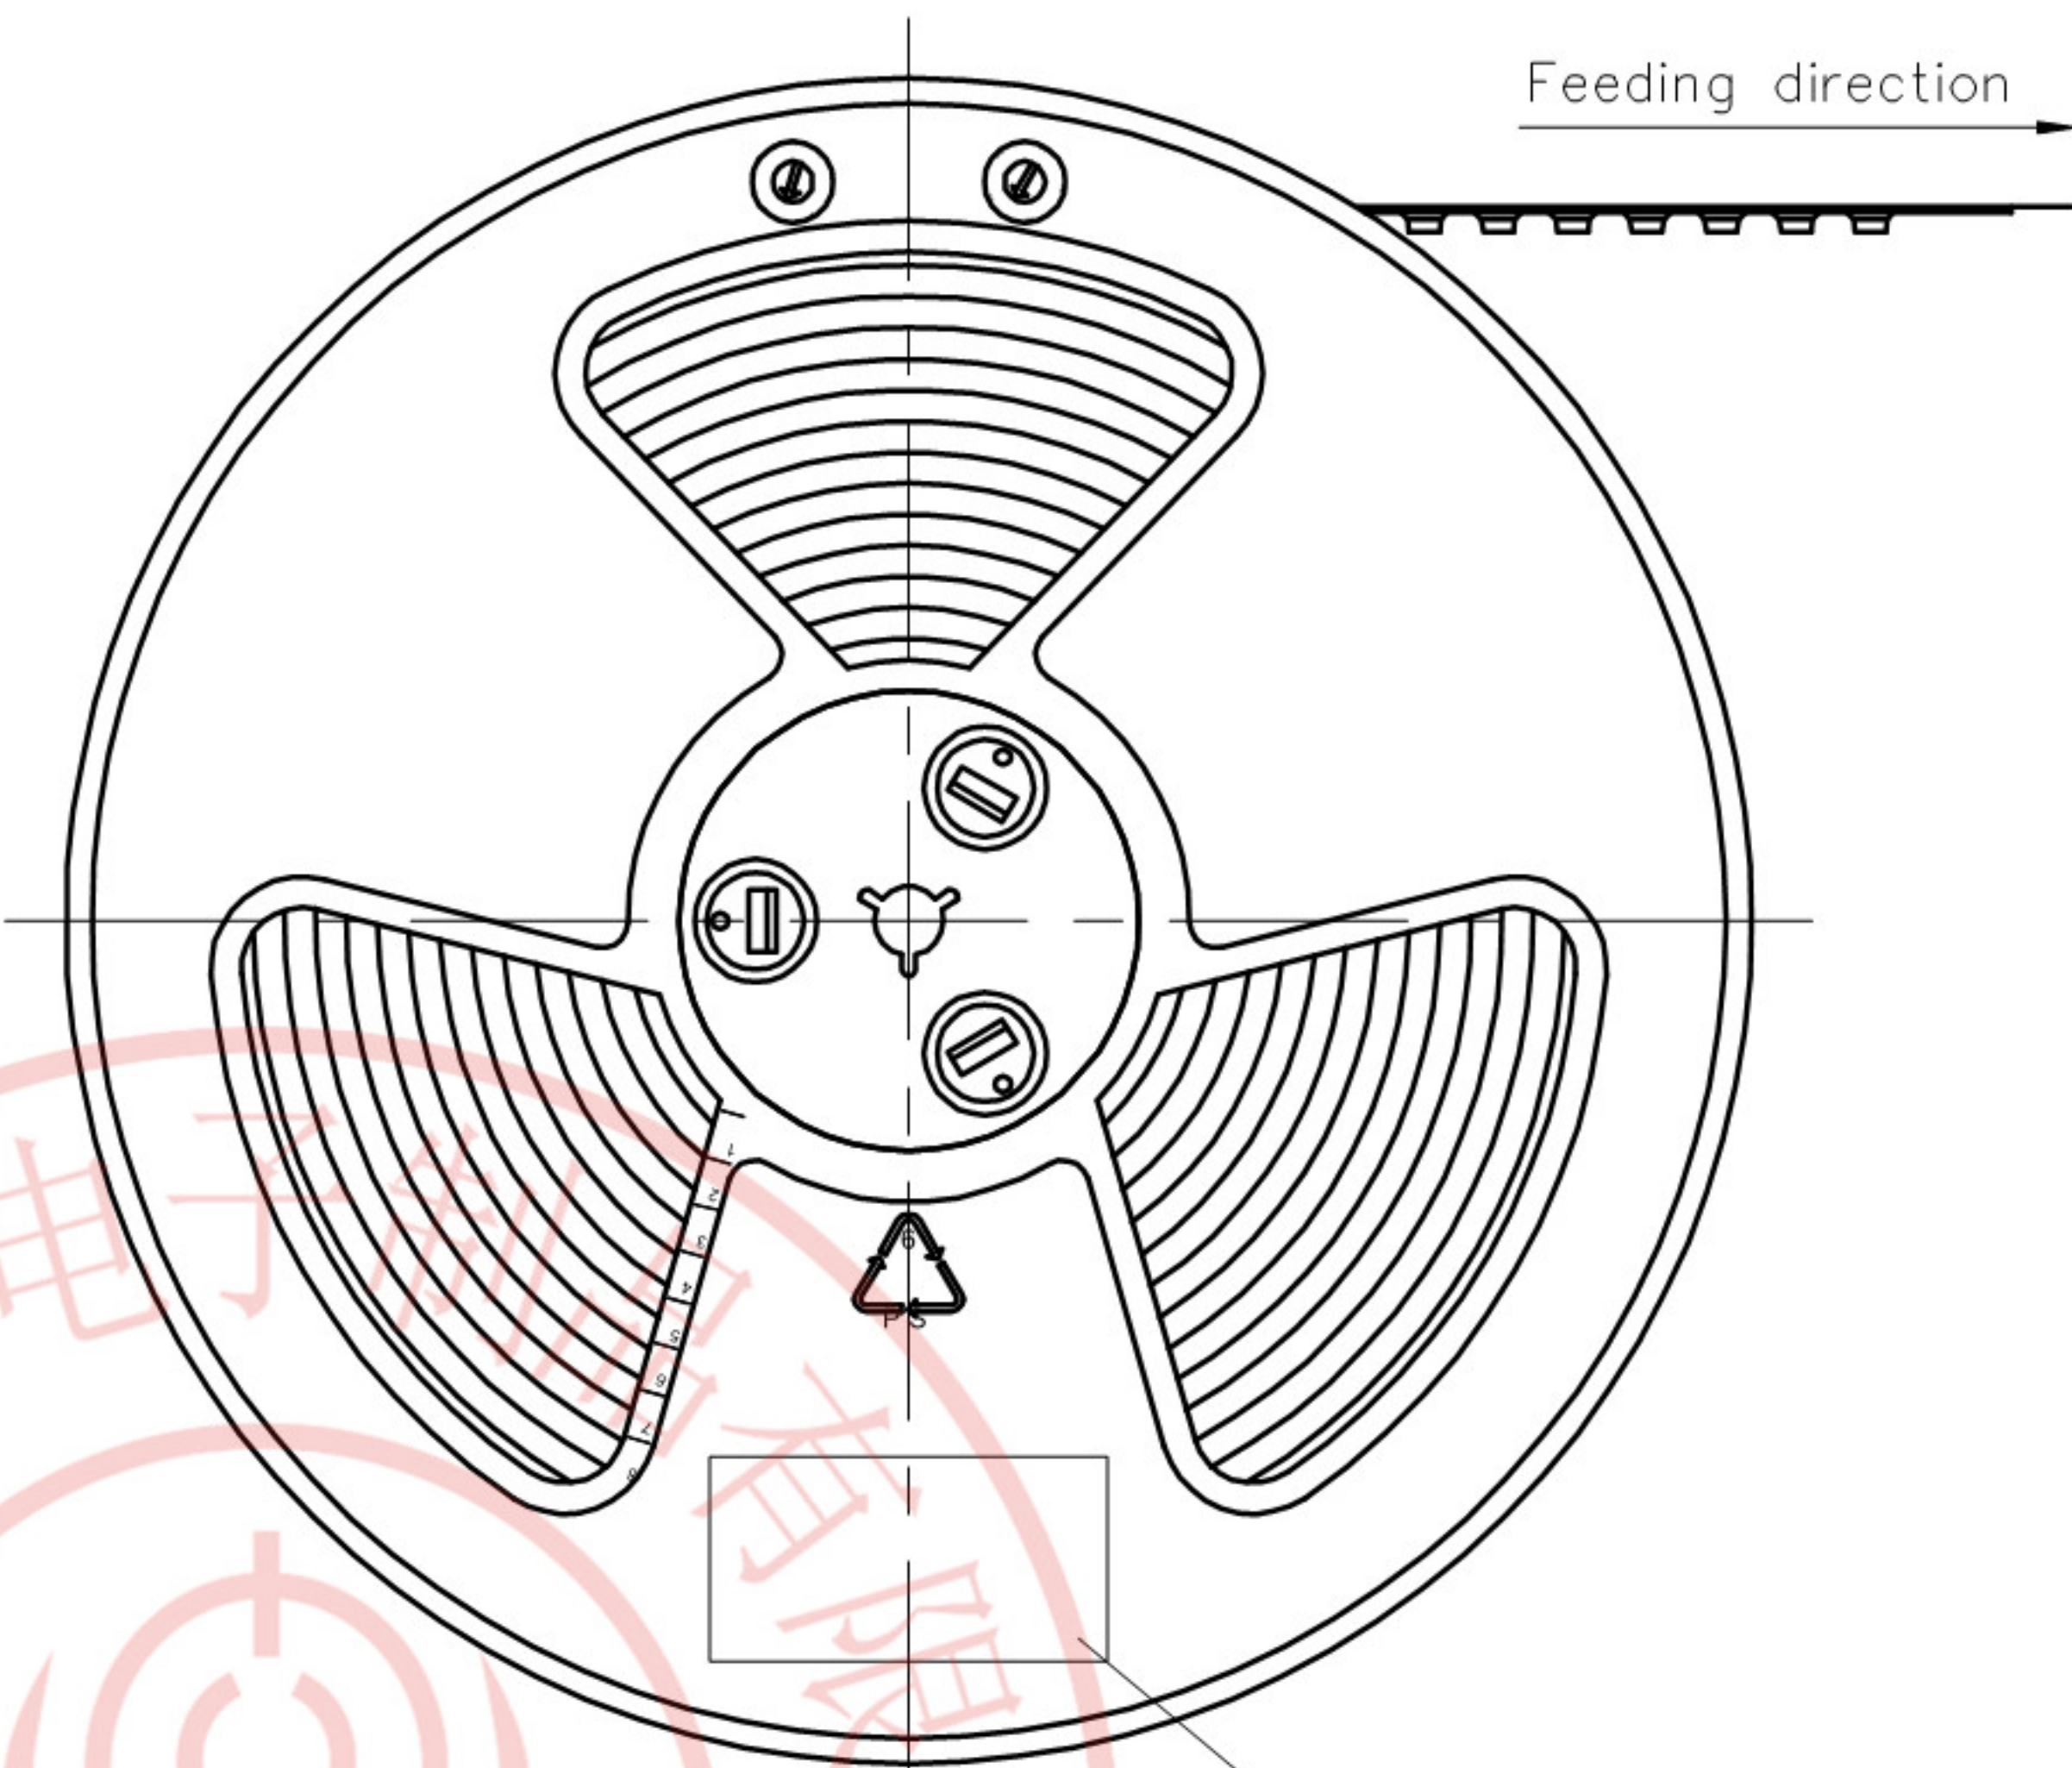


Interior Lable

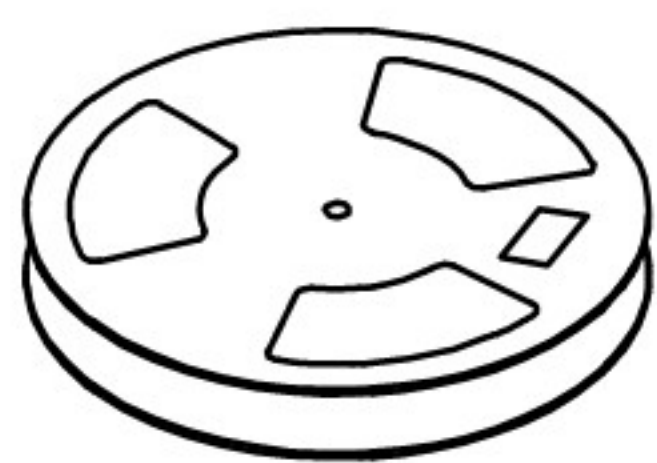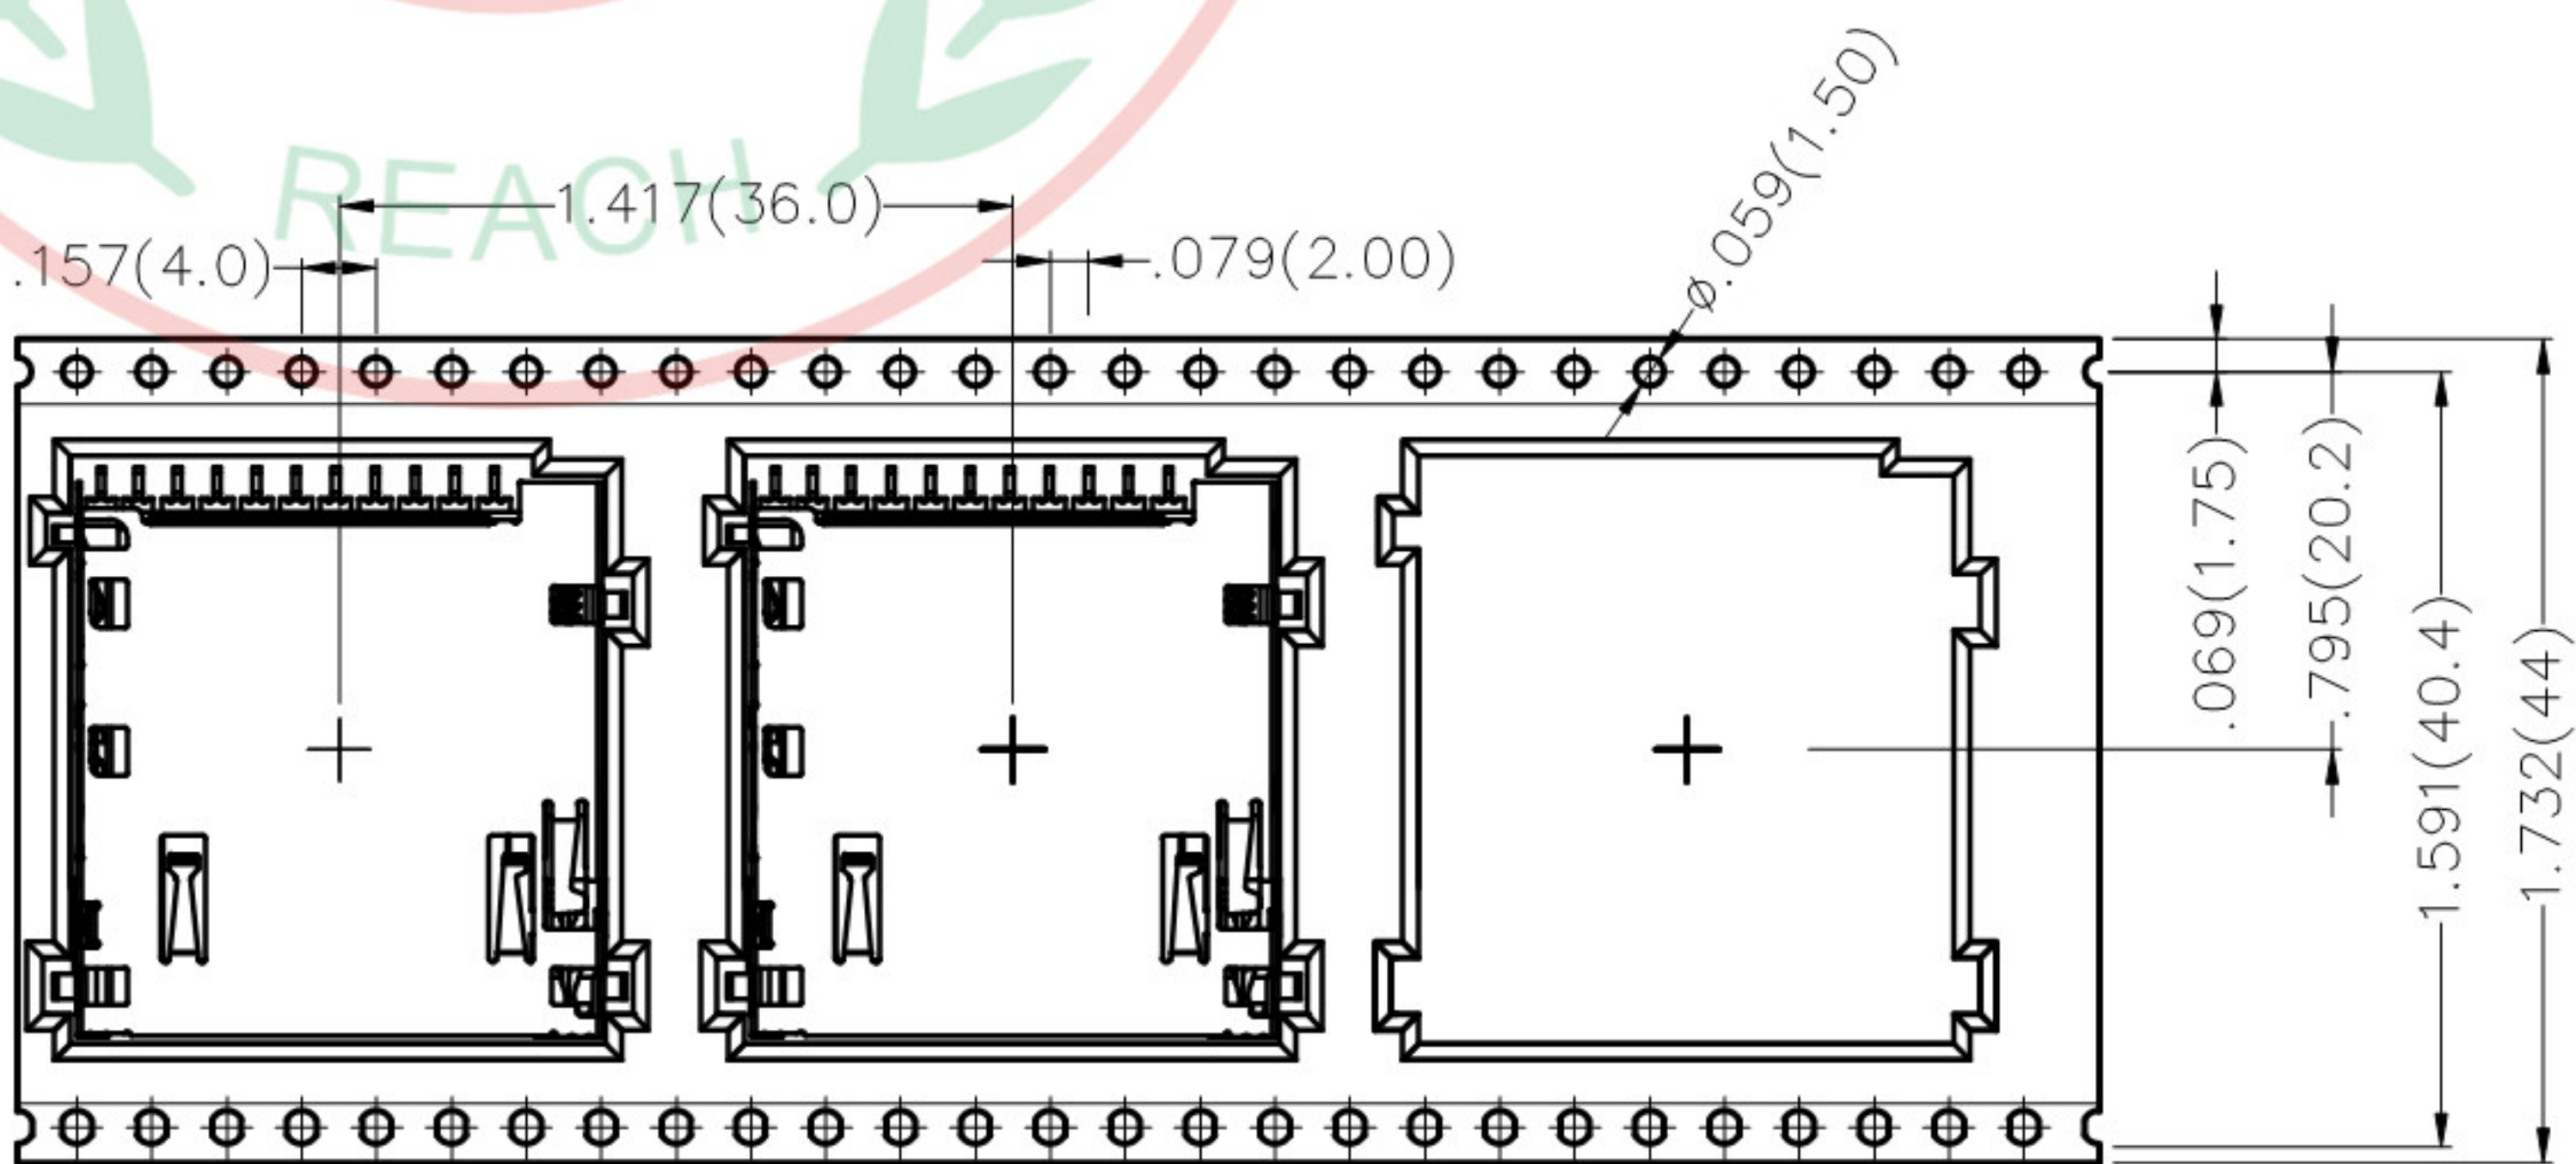


650 pcs/Reel

PE Bag

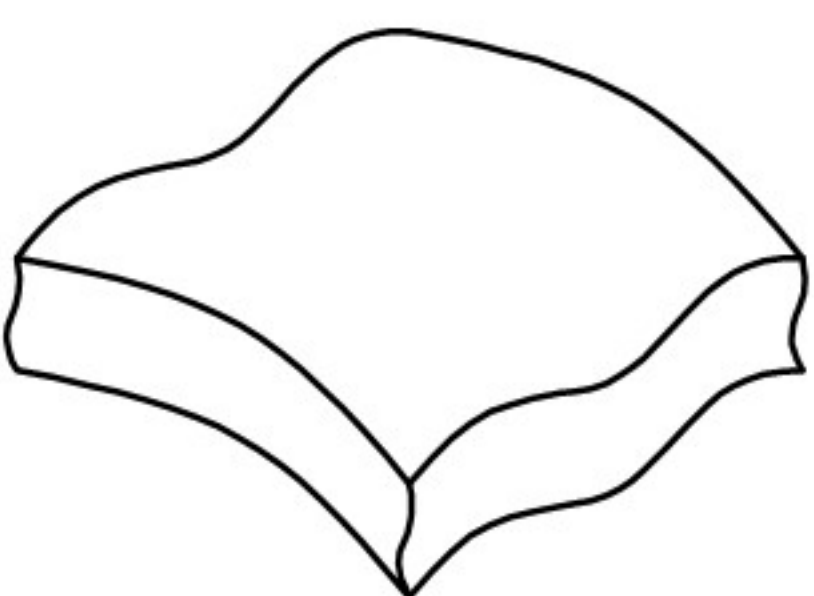

Drying agent/pcs

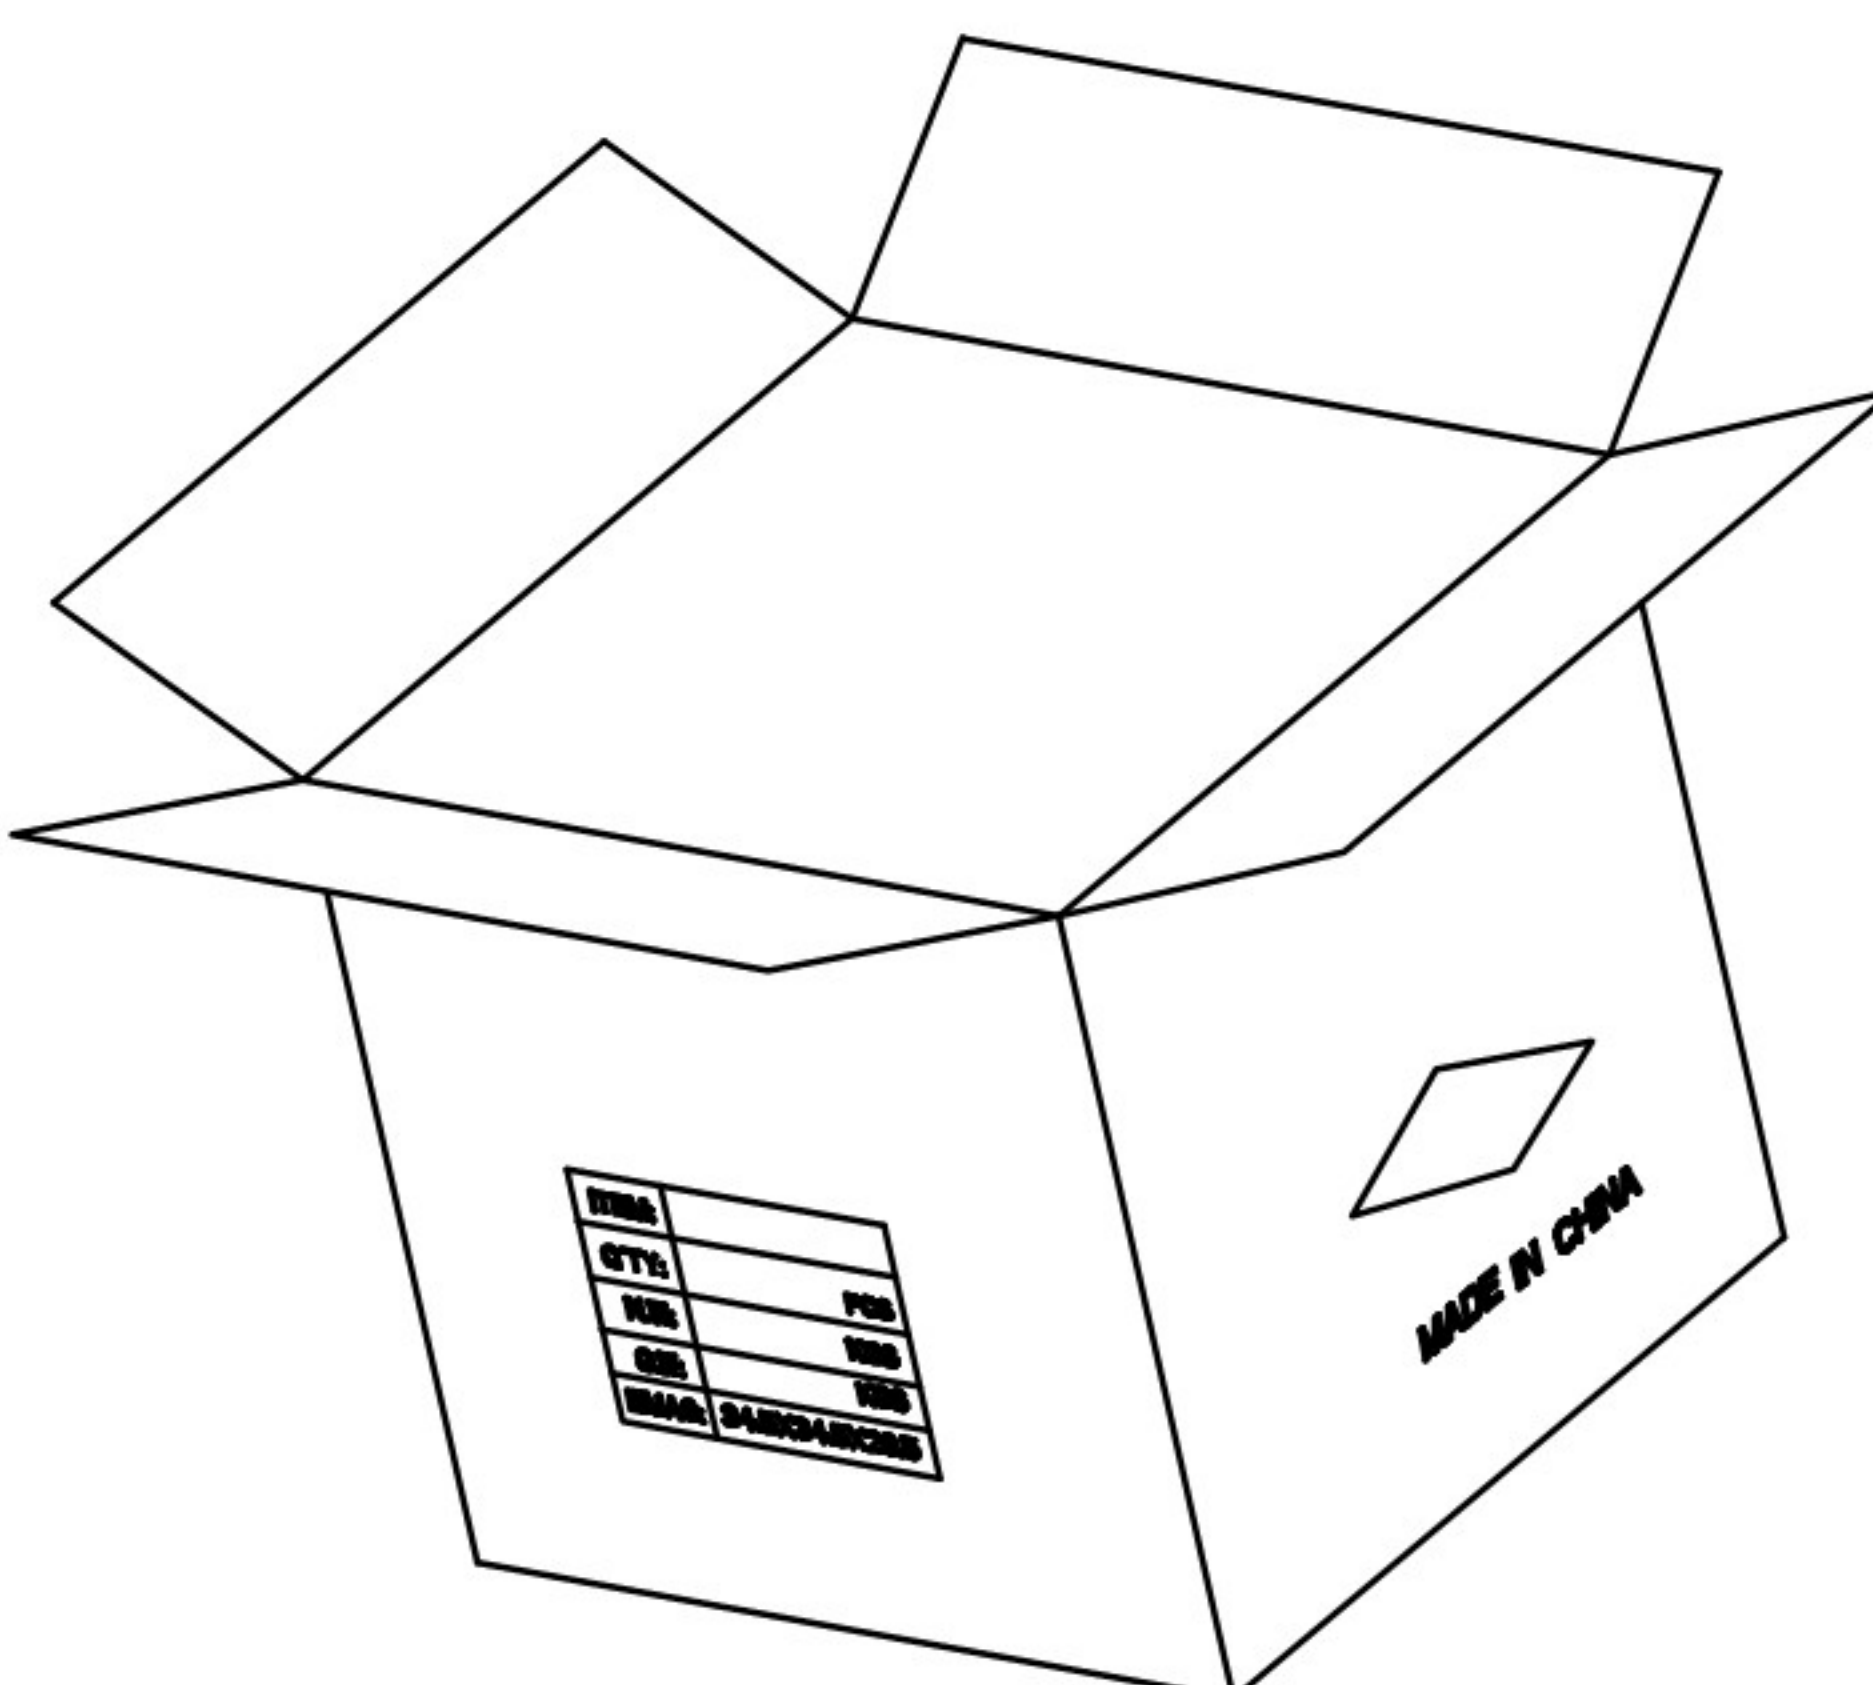

Feeding Direction

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK		DATE 12/JUL/19		PART NO. FCD132-7M		ITEM NO. FCD132		 3K-KAMING					
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	CHECKED BY CHERRY		DATE 12/JUL/19		TITLE SD card connector (H=2.8mm)						REV 0		SHEET NO. 3/3	
		SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX°±1°	DRAWN BY KATE		DATE 12/JUL/19		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
		X.XXX±.004(0.10)	.XXX°±0.5°														