


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.




**RoHS**  
**Compatible**

P.C.B Mounting  
pattern Dimension  
(Bottom View)  
(TOLERANCE ±0.05mm)

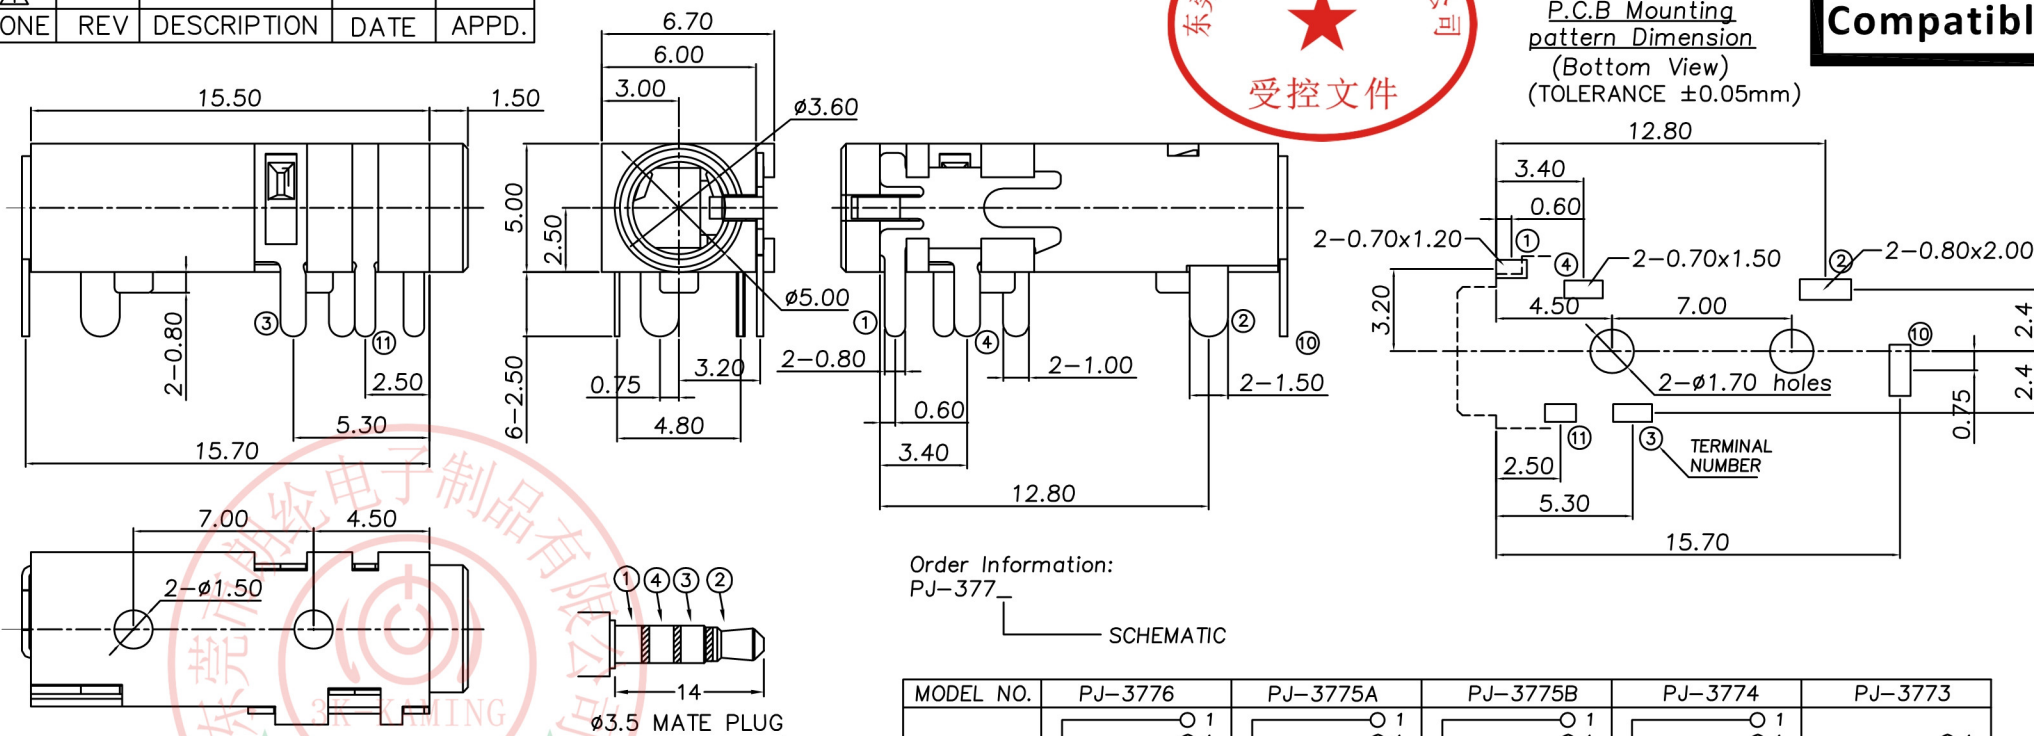

Order Information:  
PJ-377 SCHEMATIC

MODEL NO.	PJ-3776	PJ-3775A	PJ-3775B	PJ-3774	PJ-3773
SCHEMATIC					



- Specifications**
1. Rating : 12V 1.0A Max.
  2. Contact resistance: 30mΩ Max.
  3. Insulation resistance : 100MΩ Min.
  4. Withstand voltage : 500VAC
  5. Insertion and extraction force : 0.3~2.0KgF
  6. Life test : 5,000 cycles Min.
  7. Operating temperature : -28°C~85°C

8	Terminal 11	Brass	1	Sn Plated
7	Terminal 10	Brass	1	Sn Plated
5	Terminal 4	Copper Alloy	1	Sn Plated
4	Terminal 3	Copper Alloy	1	Sn Plated
3	Terminal 2	Copper Alloy	1	Sn Plated
2	Terminal 1	Copper Alloy	1	Sn Plated
1	Plastic Housing	PA66	1	Black
No.	Part Name	Material	Q"ty	Finishing

东莞市朗纶电子制品有限公司  
Dongguan langlun electronic products Co., Ltd  
TEL: 86-0769-82123233 FAX: 86-0769-83536433

DESIGN	Sean	SCALE			TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	PHONE JACK
DRAWING	Sean	UNIT	mm		less than 10 — ±0.2	PART NO	PJ-377 SERIES
CHECK	Sean	SIZE	A4: 210*297		10~30 — ±0.3	DRAWING NO	
APPROVAL	Eric	VERSION	01		30~100 — ±0.5	DATE	2014/06/26
					ANGLE — ±2°		