
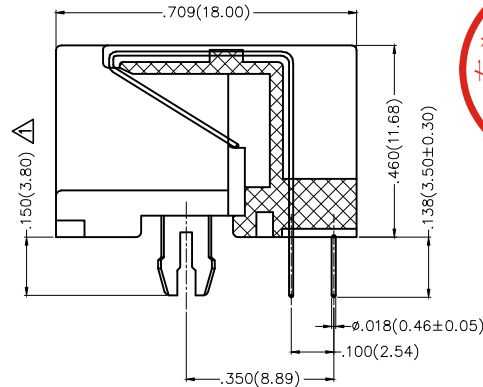


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		1. Dimension: Change 3.46 into 3.80mm Change 11.18 into 11.00mm 2. Part No.: Change FRJ1119 into FRJ11005	25/MAY/18	Vandy	Eric

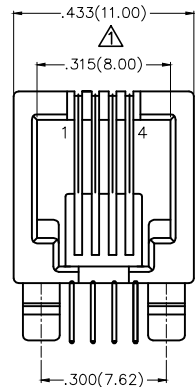


SPECIFICATIONS

Electrical Performances

Current Rating: 1.5A AC(rms)/DC
Voltage Rating: 125V AC(rms)/DC
Contact Resistance: 30 mΩ Max
Insulation Resistance: 500 MΩ Min
Withstanding Voltage: 1000V AC r.m.s
Temperature Range—Operating: -40°C~+85°C
Durability: 750 Cycles Min.

Material and Plating


Housing: PBT (UL 94V-0) Black
Contact: Phosphor Bronze/ Gold plated

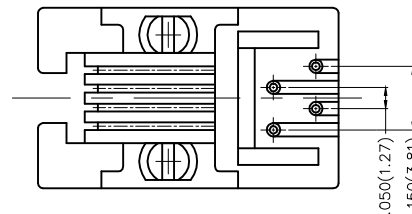

Ordering Information

FRJ11 005 — 1 1 XX K6 K 2 0
1 2 3 4 5 6 7 8

1	Category FRJ11—RJ11 Connector	2	Distinction No. 005	3	Ports options 1—1 Port	4	Plating 1—Gold Plated
5	Thickness of plating 00—Gold flash 03—3μ" Custom plate available	6	Color—Resin K6—Black	7	Packaging K—Tray	8	Contact type 2—Round pin



Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/SEP/16	PART NO.  FRJ11005-11XXK6K20	ITEM NO. FRJ11005	 3K-KAMING®	
		X.±.012(0.30)	X'±5'	CHECKED BY	DATE	TITLE RJ11 Connector 4P4C 90° Angle			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X'±2'	CHERRY	18/SEP/16			REV 1	
		X.XX±.006(0.15)	.XX'±1'	DRAWN BY	DATE				
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5'	KATE	18/SEP/16	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			