








REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	1. Add the "TXGA" logo 2. Part No.: Change FRJ45151 into FRJ45009	31/MAY/18	KATE	ERIC

SPECIFICATIONS

Electrical
 Current Rating: 1.5A AC(rms)/DC
 Voltage Rating: 125V AC(rms)/DC
 Contact Resistance: 50 mΩ Max
 Insulation Resistance: 500 MΩ Min / DC 500V
 Withstanding Voltage: 1000V AC r.m.s
 Operating Temperature: -0°C~+70°C
 LED Plating: Forward Voltage: 2.2 Volts Typical
 Reverse Voltage: 5 Volts Maximum

Mechanical:
 Durability: 750 Cycles Min
 Material and Plating
 Housing: Glass Filled Polyester (UL 94V-0) Black
 Contact: Phosphor Bronze/Gold Plated
 Shell: Copper Alloy/Nickel Plated
 LED: Option

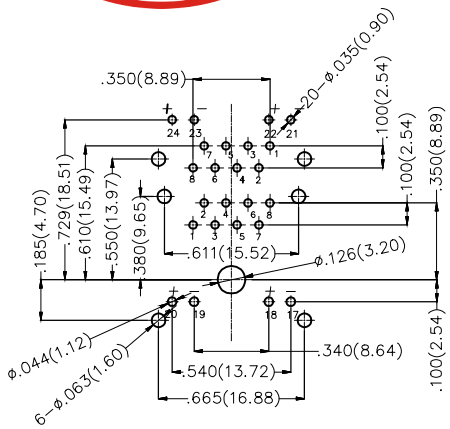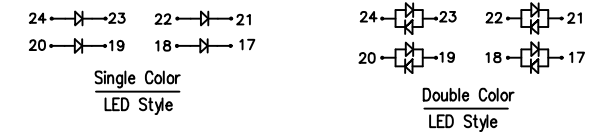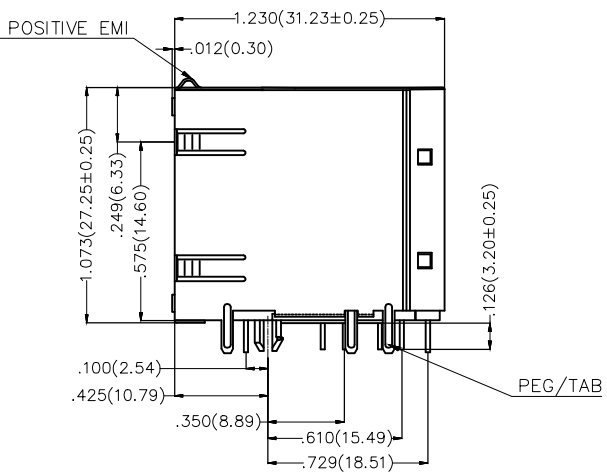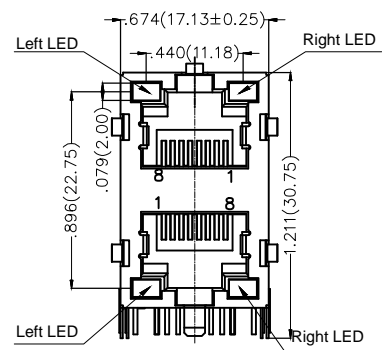

Ordering Information

FRJ45 009 - 2 1 XX K6 K X 2 0 0
 1 2 3 4 5 6 7 8 9

- 1 Category: FRJ45-RJ45 Connector
- 2 Distinction No.: 009
- 3 Ports options: 2-2 Ports
- 4 Plating: 1-Gold Plated
- 5 Thickness of plating: 00-Gold flash, 03-3μ", Custom plate available
- 6 Color-Resin: K6-Black
- 7 Packaging: K-Tray
- 8 LED style: 7-L: Orange R: Green, 2-L: Green R: Yellow
- 9 Contact type: 2-Round pin

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO. △	ITEM NO.	
	X.±.012(0.30)	X.±5'	FRANK	04/JUL/17	FRJ45009-21XXK6KX200	FRJ45009	
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	X.±2'	CHECKED BY	DATE	TITLE		REV 1 SHEET NO. 1/1
SCALE 5:1	X.XX±.006(0.15)	.XX±1'	CHERRY	04/JUL/17	RJ45 Connector 8P8C 90°Angle (DIP)		
SIZE A4	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			LXF	04/JUL/17			