
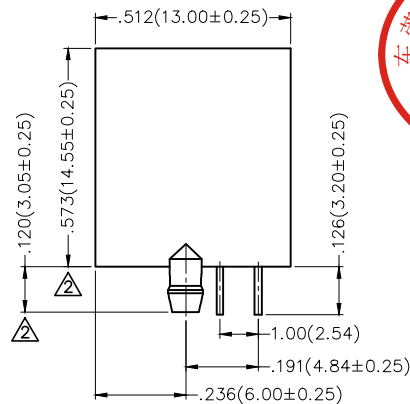


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Part No.: Change FRJ45143 into FRJ45017	31/MAY/18	KATE	ERIC
2	△	Change the structure and dimensions	14/MAY/20	KATE	CHERRY


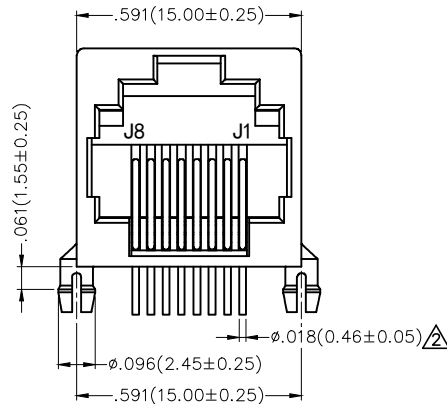


Electrical

Current Rating: 1.5A AC(rms)/DC
Voltage Rating: 125V AC(rms)/DC
Contact Resistance: 30 mΩ Max
Insulation Resistance: 500 MΩ MIN
Withstanding Voltage: 1000V AC r.m.s
Operating Temperature: -45°C~+85°C

Material

Housing: PBT (UL 94V-0)
Contact: Phosphor Bronze/Gold Plated

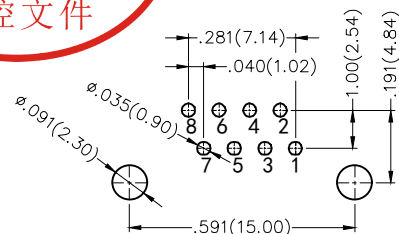

Recommended P.C.Board Layout

Ordering Information

FRJ45 017 — 1 1 XX XX K 0 2 0 0
1 2 3 4 5 6 7 8

1 Category FRJ45-RJ45 Connector	2 Distinction No. 017	3 Ports options 1-1 Port	4 Plating 1-Gold Plated	5 Thickness of plating 00-Gold flash 03-3μ" Custom plate available
6 Color-Resin G1-Gray K6-Black	7 Packaging K-Tray	8 Contact type 2-Round pin		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 30/JUN/17	PART NO.  FRJ45017-11XXXXK0200	ITEM NO. FRJ45017	 3K-KAMING	
		X.±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE RJ45 Connector 8P8C 90° Angle (DIP)			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X.±2°	CHERRY	30/JUN/17			REV 2	
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX°±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	.XXX°±0.5°	LXF	30/JUN/17				