

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Part No.: Change FRJ45138 into FRJ45022	01/JUN/18	KATE	ERIC





SPECIFICATIONS

Electrical

Current Rating: 1.5A AC(rms)/DC  
Voltage Rating: 125V AC(rms)/DC  
Contact Resistance: 30 mΩ Max  
Insulation Resistance: 500 MΩ Min / DC 500V  
Withstanding Voltage: 500V AC r.m.s  
Operating Temperature: -40°C~+85°C

Material and Plating


Housing: Thermoplastic (UL 94V-0)  
Contact: Phosphor Bronze  
Shell: Brass  
Plating  
Contact: Gold Plated Over Nickel  
Shell: Nickel Plated

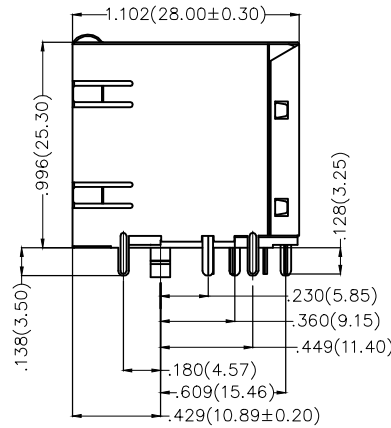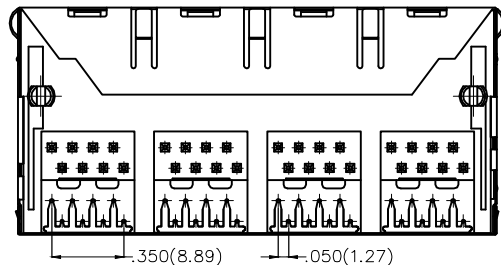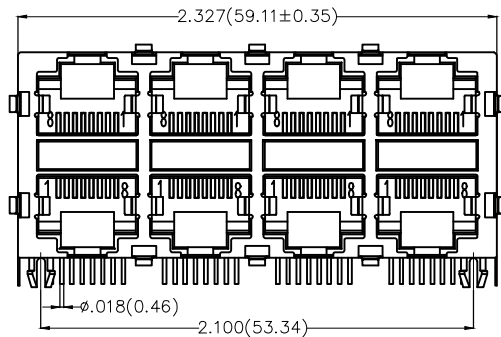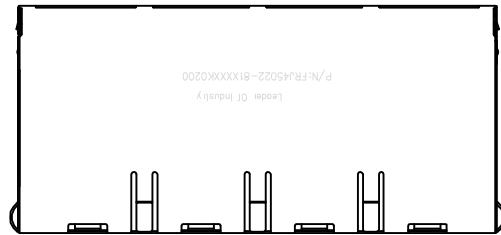

Ordering Information

FRJ45 022 - 8 1 XX XX K 0 2 0 0  
1 2 3 4 5 6 7 8

1	Category FRJ45-RJ45 Connector	2	Distinction No. 022	3	Ports options 8-8 Ports	4	Plating 1-Gold Plated
5	Thickness of plating 00-Gold flash 03-3μ" Custom plate available	6	Color-Resin K6-Black U1-Blue	7	Packaging K-Tray	8	Contact type 2-Round pin

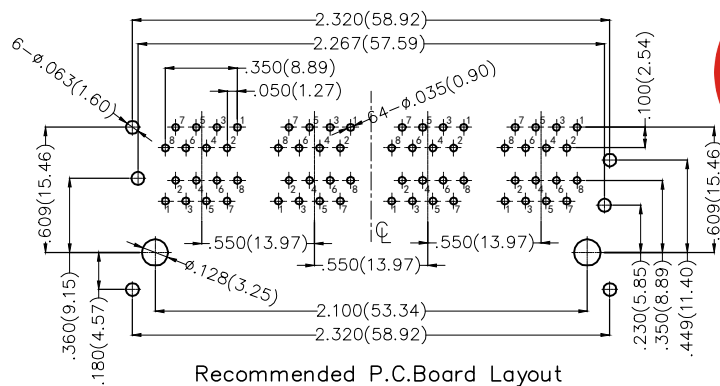

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/JUN/17	PART NO. △ FRJ45022-81XXXXK0200	ITEM NO. FRJ45022	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	.X'±5' .X'±2' .XX'±1' .XXX'±0.5'	CHECKED BY CHERRY	DATE 22/JUN/17	TITLE RJ45 Connectors 8P8C 90°Angle	
SCALE 5:1	SIZE A4	DRAWN BY LXF		DATE 22/JUN/17	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		