


P.C.B. LAYOUT
(TOP VIEW)








SPECIFICATIONS

Current Rating: 1.5A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-plated
 Solder Tabs: Brass/Gold-plated
 Material: Nylon 6T,UL94V-0
 Color: Black
 Qty/reel: 4500pcs



Ordering Information & Dimensions

PIN	A	B	C
2	1.20	4.20	2.65
3	2.40	5.40	3.85
4	3.60	6.60	5.05
5	4.80	7.80	6.25
6	6.00	9.00	7.45
7	7.20	10.20	8.65

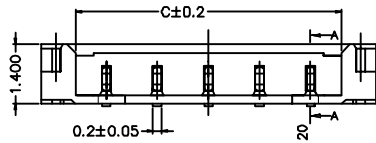

UNITS mm	东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd		
MAT'L	PART NO.(INTENDED USE) A1201WV-S-XP	TITLE: 1.2mm PITCH 180°WAFER-SMT TYPE ULTRA LOW PROFILE	
FINISH	APPD:	DWG NO.: A1201WV-S-XP	
Q'TY PCS	CHKD: DR: HU 2016.09.25	SCALE 1/1	SHEET 1/1
		REV. A	