






PITCH 1.25mm BAR CONNECTORS



性能:


- 额定电流: 1A
- 额定电压: 100V
- 耐电压: 500V
- 接触电阻: $\leq 20\text{m}\Omega$
- 绝缘电阻: $500\text{M}\Omega$
- 工作温度: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$


塑件(材质): LCP, UL94V-0
插簧(材质): 磷青铜, 镀锡/镀金
焊片(材质): 磷青铜, 镀锡/镀金

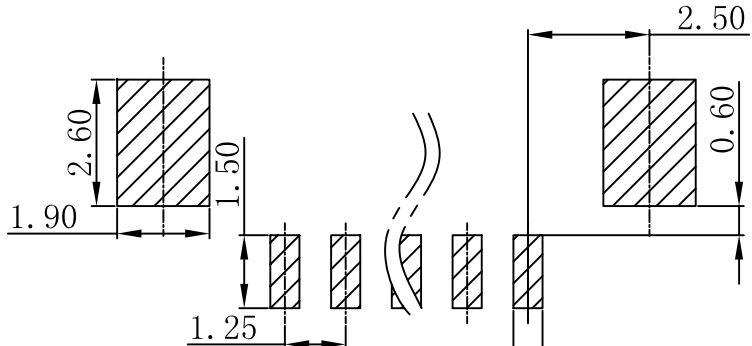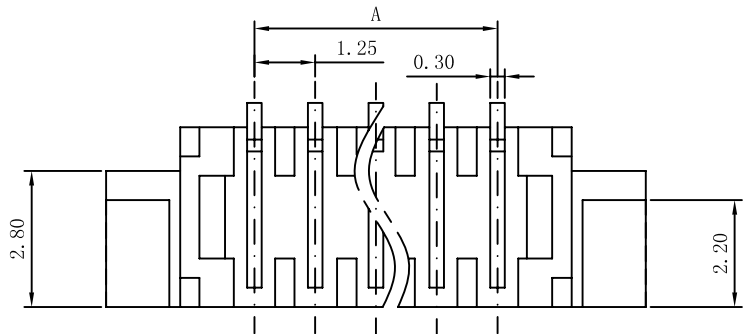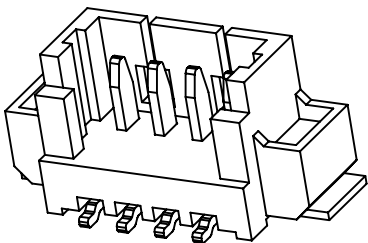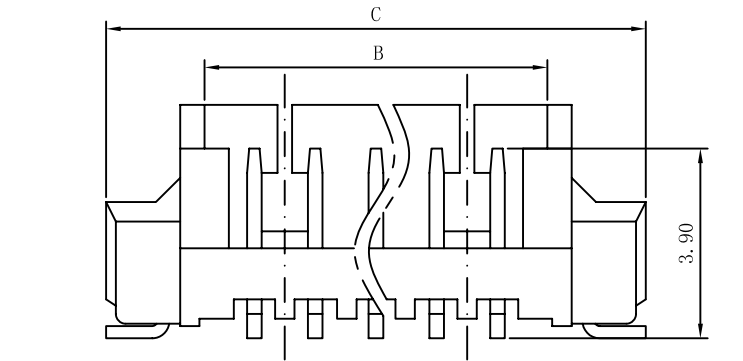

线路板
P. C. B Layout

孔位	A	B	C
2	1.25	3.10	7.35
3	2.50	4.35	8.60
4	3.75	5.60	9.85
5	5.00	6.85	11.10
6	6.25	8.10	12.35
7	7.50	9.35	13.60
8	8.75	10.60	14.85
9	10.00	11.85	16.10
10	11.25	13.10	17.35
11	12.50	14.35	18.60
12	13.75	15.60	19.85
13	15.00	16.85	21.10
14	16.25	18.10	22.35
15	17.50	19.35	23.60
16	18.75	20.60	24.85
17	20.00	21.85	26.10
18	21.25	23.10	27.35
19	22.50	24.35	28.60
20	23.75	25.60	29.85

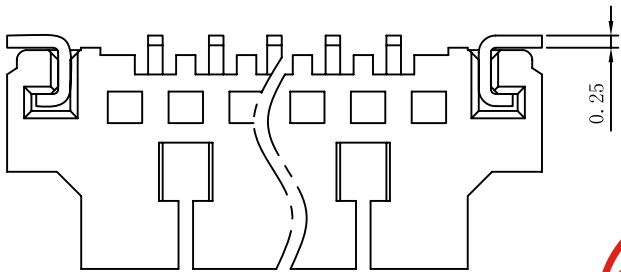

X. ± 0.3	X°. ± 5°	UNITS mm	NAME (INTENDED USE)	东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd					
.X ± 0.25	.X°. ± 2°	MAT'L	1. 25mm (C型) 条形连接器立贴式						
.XX ± 0.20	.XX°. ± 1°	FINISH	PART NO. (INTENDED USE)	TITLE:					
.XXX ± 0.10	.XXX°. ± 0.5°		1. 25-C-nPB	1. 25mm (C型) 条形连接器立贴式					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAWING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAWING(LANG LUN) INC.			APPD:	DWG NO.:					
			CHKD:	125N05-CUB0000000					
			Q' TY						
			DR: YLZ 2011.09.28	 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1/1</td><td>1/1</td><td>A</td></tr></table>			SCALE	SHEET	REV.
SCALE	SHEET	REV.							
1/1	1/1	A							