


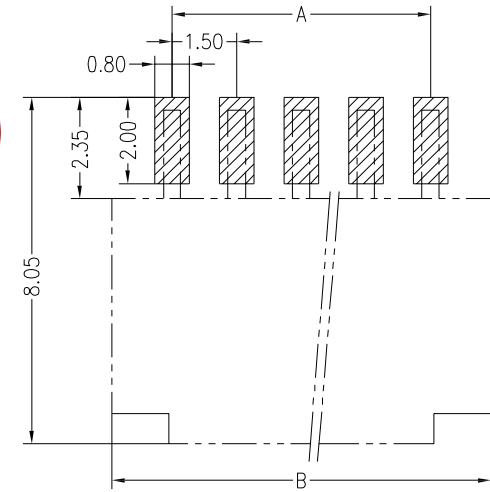
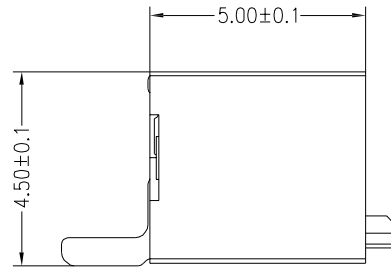
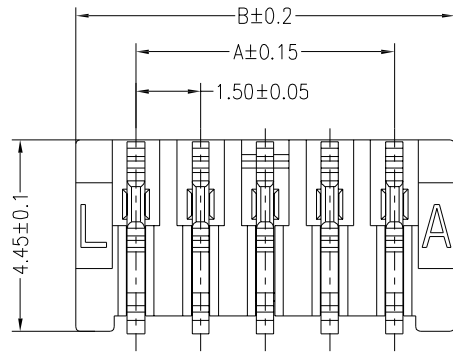


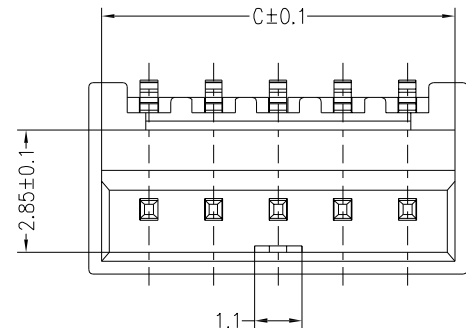

PCB LAYOUT

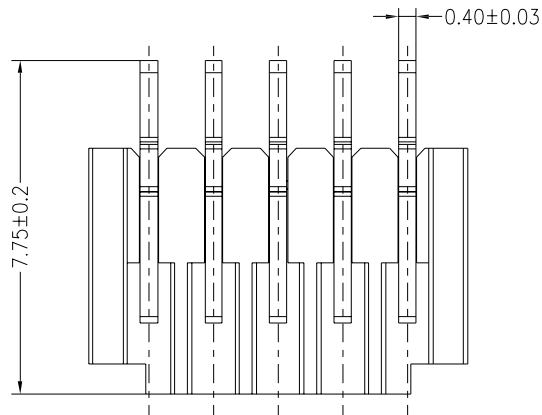


PIN	DIM A	DIM B	DIM C
2pin	1.50	4.30	3.70
3pin	3.00	5.80	5.20
4pin	4.50	7.30	6.70
5pin	6.00	8.80	8.20
6pin	7.50	10.30	9.70
7pin	9.00	11.80	11.20
8pin	10.50	13.30	12.70
9pin	12.00	14.80	14.20
10pin	13.50	16.30	15.70
11pin	15.00	17.80	17.20
12pin	16.50	19.30	18.70
13pin	18.00	20.80	20.20
14pin	19.50	22.30	21.70
15pin	21.00	23.80	23.20



主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 350V AC DC
额定电流 (Rated current): 3.0A AC DC
耐 电 压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

B	CONTACT	2~15 PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

UNITS mm		东莞市朗纶电子制品有限公司			
MAT'L		Dongguan langlun electronic products Co., Ltd			
FINISH		PART NO.(INTENDED USE)	TITLE:		
		A1504AWR-**	1.5mm PITCH 90° WAFER SMT TYPE		
Q'TY PCS		APPD:	DWG NO.:		
			A1504AWR-**		
		CHKD:			
		DR: HU 2016.09.28			
			SCALE	SHEET	REV.
			1/1	1/1	A

X.± 0.3	X°.± 5°
.X± 0.25	.X°.± 2°
.XX± 0.20	.XX°.± 1°
.XXX± 0.10	.XXX°.± 0.5°

FINISH
Q'TY
PCS