




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

- 1. Material: PA66 UL94V-2
- 2. Temperature Range—Operating: -25C° ~ +85C°
- 3. Applicable Terminal: FT20009

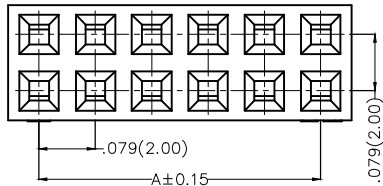

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
4	FHG20010-D04M2K6B	.079(2.00)	.165(4.20)
6	FHG20010-D06M2K6B	.157(4.00)	.244(6.20)
8	FHG20010-D08M2K6B	.236(6.00)	.323(8.20)
10	FHG20010-D10M2K6B	.315(8.00)	.402(10.20)
12	FHG20010-D12M2K6B	.394(10.00)	.480(12.20)
14	FHG20010-D14M2K6B	.472(12.00)	.559(14.20)
16	FHG20010-D16M2K6B	.551(14.00)	.638(16.20)
18	FHG20010-D18M2K6B	.630(16.00)	.717(18.20)
20	FHG20010-D20M2K6B	.709(18.00)	.795(20.20)
22	FHG20010-D22M2K6B	.787(20.00)	.874(22.20)
24	FHG20010-D24M2K6B	.866(22.00)	.953(24.20)
26	FHG20010-D26M2K6B	.945(24.00)	1.031(26.20)
28	FHG20010-D28M2K6B	1.024(26.00)	1.110(28.20)
30	FHG20010-D30M2K6B	1.102(28.00)	1.189(30.20)
32	FHG20010-D32M2K6B	1.181(30.00)	1.268(32.20)
34	FHG20010-D34M2K6B	1.260(32.00)	1.346(34.20)
36	FHG20010-D36M2K6B	1.339(34.00)	1.425(36.20)
38	FHG20010-D38M2K6B	1.417(36.00)	1.504(38.20)
40	FHG20010-D40M2K6B	1.496(38.00)	1.583(40.20)

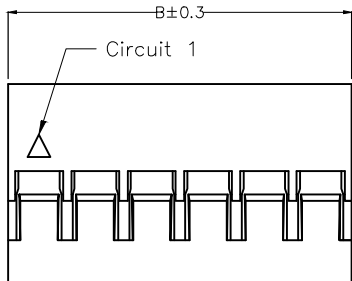

Ordering Information

FHG 200 10 — D XX M 2 K6 B
 1 2 3 4 5 6 7 8 9

1	Category	2	Series Number	3	Distinction No.	4	Row Option		
	FHG—Housing		200—Pitch2.00mm		10		D—Double row		
5	Circuits	6	Type	7	Material—Resin	8	Color—Resin	9	Packaging
	XX		M—Male		2—PA66		K6—Black		B—PE Bag



 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 3K-KAMING	
	X.±.012(0.30)	X.±5'	FRANK	25/JUN/13	FHG20010-DXXM2K6B	FHG20010		
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/1
SCALE	X.XX±.006(0.15)	.XX'±1'	DRAWN BY	DATE	Wire to Board Pitch 2.0mm(Housing)			
5:1	X.XXX±.004(0.10)	.XXX'±0.5'	CHERRY	25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			