
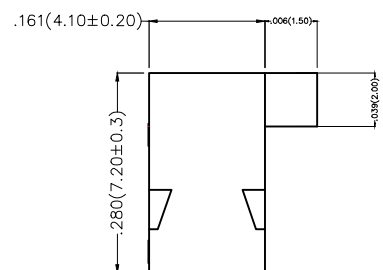
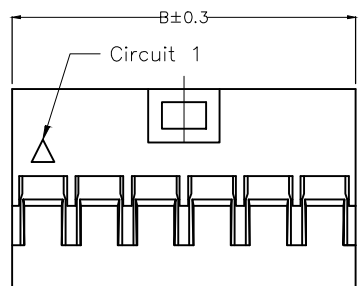


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

1. Material: PA66 UL94V-2
2. Temperature Range-Operating: -25C° ~ +85C°
3. Applicable Terminal: FT20009

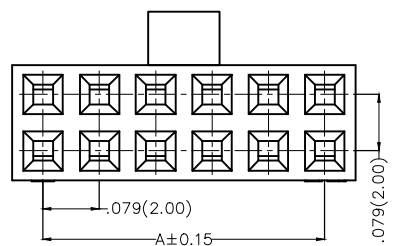

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
4	FHG20010-D04M2K6BA	.079(2.00)	.165(4.20)
6	FHG20010-D06M2K6BA	.157(4.00)	.244(6.20)
8	FHG20010-D08M2K6BA	.236(6.00)	.323(8.20)
10	FHG20010-D10M2K6BA	.315(8.00)	.402(10.20)
12	FHG20010-D12M2K6BA	.394(10.00)	.480(12.20)
14	FHG20010-D14M2K6BA	.472(12.00)	.559(14.20)
16	FHG20010-D16M2K6BA	.551(14.00)	.638(16.20)
18	FHG20010-D18M2K6BA	.630(16.00)	.717(18.20)
20	FHG20010-D20M2K6BA	.709(18.00)	.795(20.20)
22	FHG20010-D22M2K6BA	.787(20.00)	.874(22.20)
24	FHG20010-D24M2K6BA	.866(22.00)	.953(24.20)
26	FHG20010-D26M2K6BA	.945(24.00)	1.031(26.20)
28	FHG20010-D28M2K6BA	1.024(26.00)	1.110(28.20)
30	FHG20010-D30M2K6BA	1.102(28.00)	1.189(30.20)
32	FHG20010-D32M2K6BA	1.181(30.00)	1.268(32.20)
34	FHG20010-D34M2K6BA	1.260(32.00)	1.346(34.20)
36	FHG20010-D36M2K6BA	1.339(34.00)	1.425(36.20)
38	FHG20010-D38M2K6BA	1.417(36.00)	1.504(38.20)
40	FHG20010-D40M2K6BA	1.496(38.00)	1.583(40.20)

Ordering Information

FHG 200 10 - D XX M 2 K6 B A  
 1 2 3 4 5 6 7 8 9 10

1 Category FHG-Housing	2 Series Number 200-Pitch2.00mm	3 Distinction No. 10	4 Row Option D-Double row	5 Circuits XX
6 Type M-Male	7 Material-Resin 2-PA66	8 Color-Resin K6-Black	9 Packaging B-PE Bag	10 Type A-With point



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG20010-DXXM2K6BA	ITEM NO. FHG20010	 3K-KAMING® REV 0 SHEET NO. 1/1
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.±5'	CHECKED BY CHERRY	DATE 25/JUN/13	TITLE Wire to Board Pitch 2.0mm(Housing)		
SCALE 5:1	SIZE A4	X.XX±.006(0.15) .XX±1'	DRAWN BY KEVIN	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		