
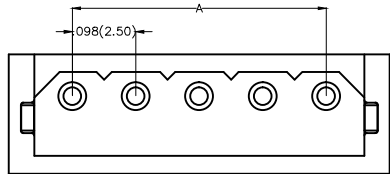



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66(UL 94V-0)
 Applicable Terminal: FT25005
 Mates With(Wafer): FWF25003,FWF25025Series.

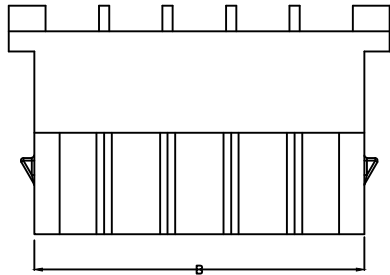

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
2	FHG25002-S02M2W1B	.098(2.50)	.224(5.70)
3	FHG25002-S03M2W1B	.197(5.00)	.332(8.20)
4	FHG25002-S04M2W1B	.295(7.50)	.421(10.70)
5	FHG25002-S05M2W1B	.394(10.00)	.520(13.20)
6	FHG25002-S06M2W1B	.492(12.50)	.618(15.70)
7	FHG25002-S07M2W1B	.591(15.00)	.717(18.20)
8	FHG25002-S08M2W1B	.689(17.50)	.815(20.70)
9	FHG25002-S09M2W1B	.787(20.00)	.913(23.20)
10	FHG25002-S10M2W1B	.886(22.50)	1.012(25.70)
11	FHG25002-S11M2W1B	.984(25.00)	1.110(28.20)
12	FHG25002-S12M2W1B	1.083(27.50)	1.209(30.70)

Ordering Information

FHG 250 02 — S XX M 2 W1 B
 1 2 3 4 5 6 7 8 9

1 Category FHG—Housing	2 Series Number 250—Pitch2.50mm	3 Distinction No. 02	4 Row Option Single Row	5 Circuits XX
6 Entry Type M—Male	7 Material—Resin 2—PA66	8 Color—Resin W1—White	9 Packaging B—PE Bag	



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUL/13	PART NO. FHG25002-SXXM2W1B	ITEM NO. FHG25002	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.X±.012(0.30) X.±5'	CHECKED BY JACOB	DATE 25/JUL/13	TITLE Wire to Board Pitch 2.50mm(Housing)		
SCALE 5:1	SIZE A4	X.XX±.006(0.15) .XX±1'	DRAWN BY CHERRY	DATE 25/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		